



Electrical

CONTACT TYPE: 5 WATTS
 CONTACT RATING: 175 VDC
 SWITCHING VOLTAGE, MAX.: 0.25 AMPS
 SWITCHING CURRENT, MAX.: 1.5 AMPS
 CARRY CURRENT, MAX.: 220 mΩ (N.O.)
 CONTACT RESISTANCE INCLUDING LEADS, MAX.: 220 mΩ (N.C.)
 BREAKDOWN VOLTAGE, MIN.: 200 VDC



CAPSULE: BLACK UL94V-0 POLYESTER
 POTTING: BLACK EPOXY
 LEADS: WIRE PVC 24 AWG 7/32 UL1569
 ACTUATOR: 57030-000
 ACTUATE DISTANCE: .150" MIN.
 DEACTUATE DISTANCE: .800" MAX.

Physical

FORM C
 5 WATTS
 175 VDC
 0.25 AMPS
 1.5 AMPS
 220 mΩ (N.O.)
 220 mΩ (N.C.)
 200 VDC



Print Detail

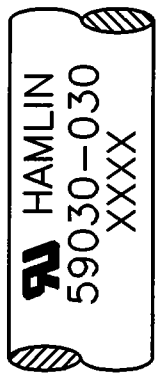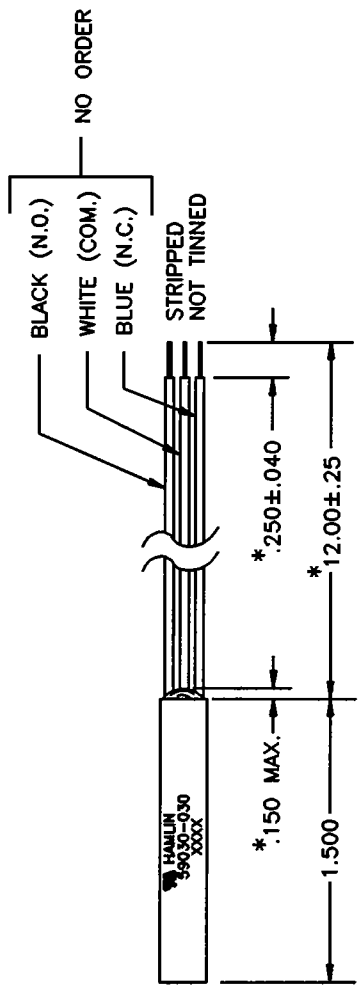

DIMENSIONS ARE IN INCHES
 TOLERANCES: ±.010 UNLESS NOTED
 * KEY ASSEMBLY DIMENSIONS

59030-030 SENSOR

AI	UPDATE/FROMAT	A9433	BJW	2/15/02	BJW	3/13/02	Breed Electronics Limited Partnership		DCR No. 1243
REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	App'd	DRR	DATE
									5/2/88
									5/11/88

Hamlin