
Rating	6A 125V AC		c <b>AL</b> us (§)	Mounting Hole	Circuit Diagram
Rating	3A 250V AC		c/ Us (I)		
Contact Resistance		50m ohm max.		Ø6.2 -Ø2.5	SPDT ON - (ON) ( )= Momentary
Insulation Resistance		DC 500V 100M ohm min.			
Dielectric Strength		AC 1000V 1 minute			
Operating Temperature		-20°C ~ 65°C		6.3	
BASE COLOR: Blue				Cut Out 4mm this may	

BASE COLOR: Blue
BUTTON COLOR: Black

Cut-Out 4mm thk. max.



**RoHS Compliant** 

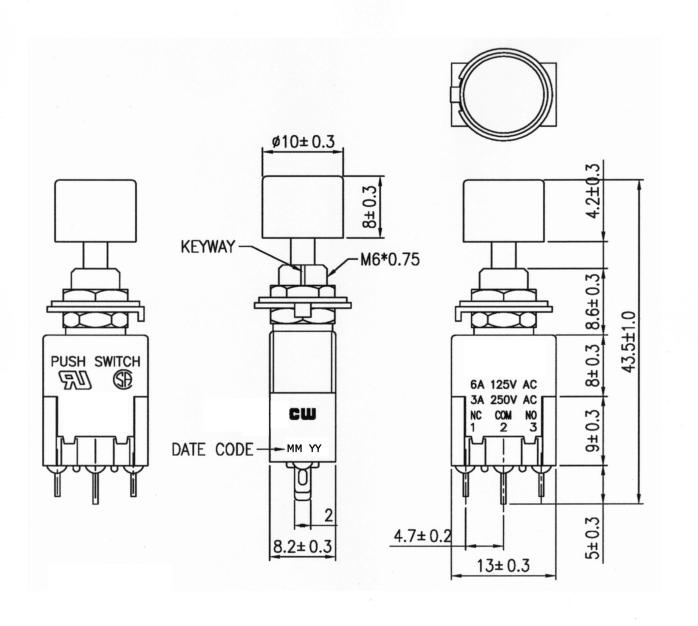