SHEET 1 OF 1



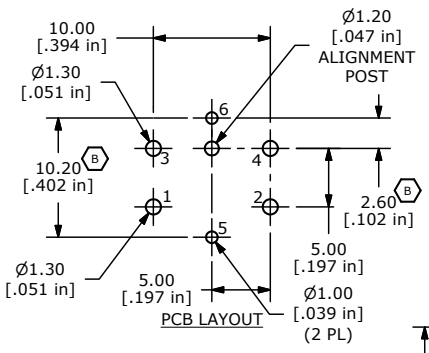





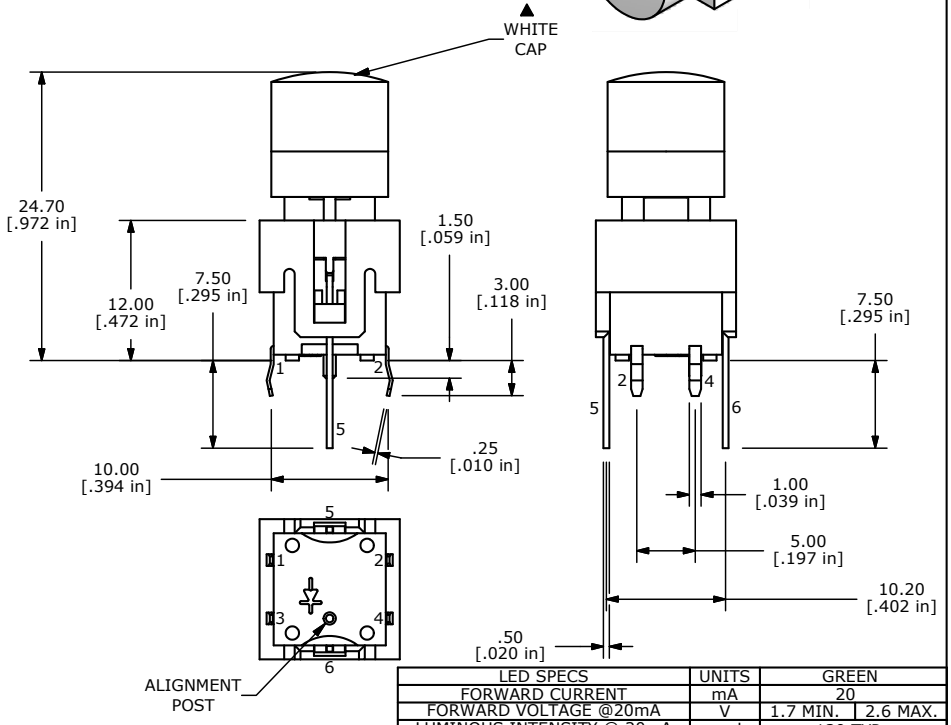

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 20VDC @ 1mA
4. CONTACT RESISTANCE: 200Ω MAX.
5. INSULATION RESISTANCE: 100MΩ MIN. @ 100VDC.
▲6. OPERATING FORCE: 125± 35gf
7. TRAVEL: 1.3 +/- 0.3 mm
8. OPERATING TEMPERATURE: -20˚C TO 70˚C
9. OPERATING LIFE: 300,000 CYCLES
▲10. LED: GREEN
11. ▲DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	1.7 MIN. | 2.6 MAX.
LUMINOUS INTENSITY @ 20mA	mcd	120 TYP.

REV	PCR NO	DESCRIPTION	DATE	BY
B	19590	UPDATE PCB LAYOUT	1/17/11	BGL
A	18913	Release For Production	3/3/10	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH™

TITLE LP15R1WHTGRN-N

SCALE	DATE	DR	DWG	REV
2 : 1	3/3/2010	BLR	B270005	B

Downloaded from Elcodis.com electronic components distributor