
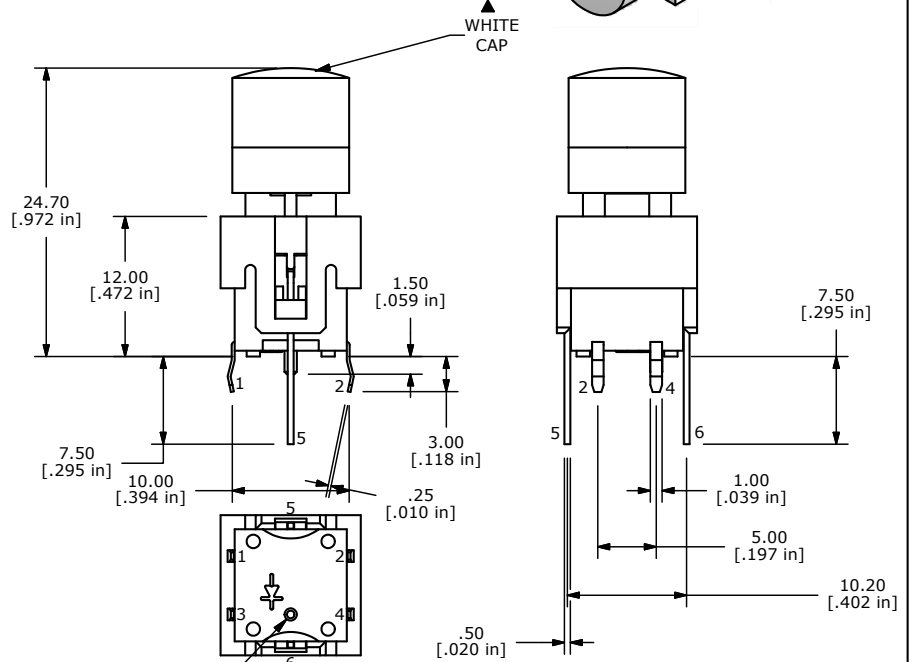


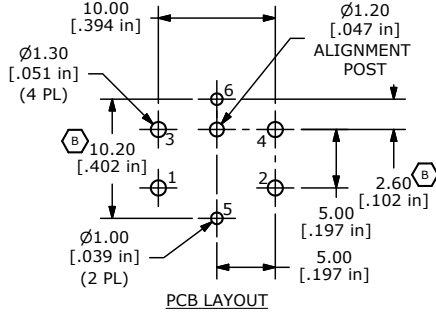


SHEET 1 OF 1



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING: 20VDC @ 1mA
 4. CONTACT RESISTANCE: 200Ω MAX.
 5. INSULATION RESISTANCE: 100MΩ MIN. @ 100VDC.
 - ▲ 6. OPERATING FORCE: 125± 35gf
 7. TRAVEL: 1.3 +/- 0.3 mm
 8. OPERATING TEMPERATURE: -20°C TO 70°C
 9. OPERATING LIFE: 300,000 CYCLES
 - ▲ 10. LED: BLUE
 11. ▲ DENOTES CRITICAL PARAMETERS
 12. 2002/95/EC (ROHS) COMPLIANT

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	3.5 MIN. 4.0 MAX.
LUMINOUS INTENSITY @ 20mA	mcd	700 MIN. 1500 TYP.

B	19590	UPDATE PCB LAYOUT	1/17/11	BGL
A	18913	Release For Production	3/1/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LP15R1WHTBLU-N				
SCALE	DATE	DR	DWG	REV
2 : 1	3/1/2010	BLR	B270004	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED