
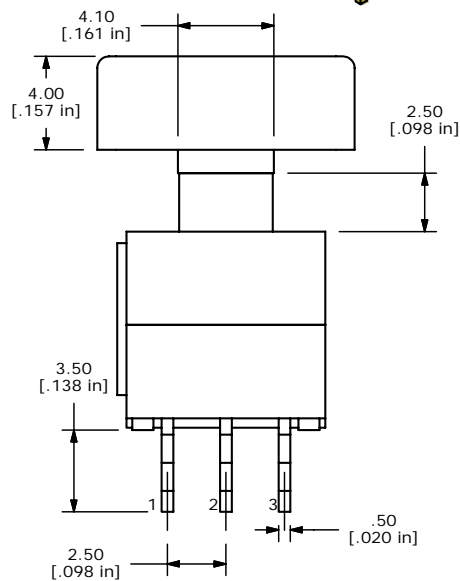
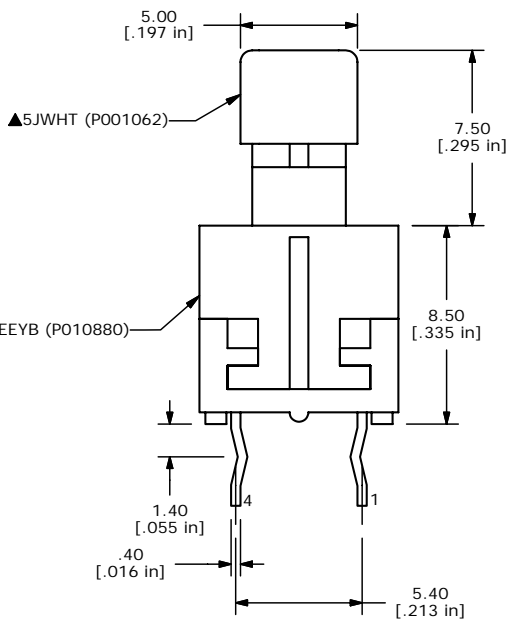


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-1, 5-4	2-3, 5-6



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF. ONLY
 4. RATING: 0.1A @ 30 VDC
 5. TRAVEL TO LOCK: 1.50±0.38mm
 6. FULL TRAVEL: 2.50±0.38mm
 7. OPERATING FORCE: 220±50gf
 8. ELECTRICAL LIFE: 10,000 CYCLES
 9. ▲DENOTES CRITICAL PARAMETER
 10. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE TL2201EEYB5JWHT

A	16382	RELEASED FOR PRODUCTION	9/6/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1	DATE 9/6/2006	DR BO	DWG XP0009P	REV A
-----------	---------------	-------	-------------	-------