






RECOMMENDED P.C.B. LAYOUT

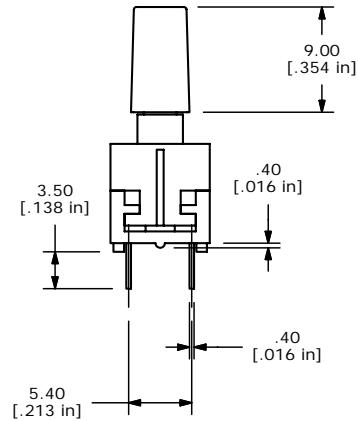

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1,5-4	2-1,5-6

( ) = MOMENTARY

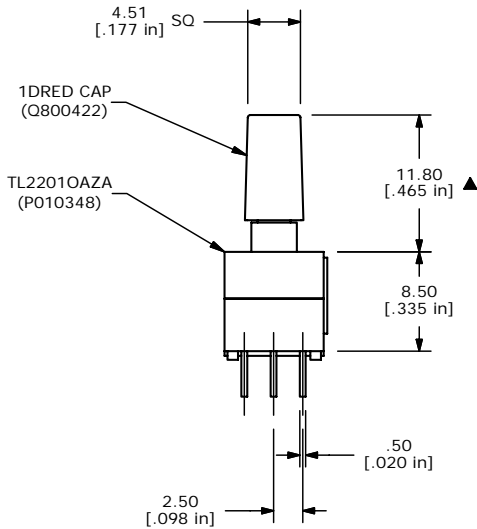

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE:  $x, x = \pm 0.4$   
 $x, xx = \pm 0.25$
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 0.1A @30VDC
  5. TRAVEL:  $2.50 \pm 0.38$
  6. OPERATING FORCE:  $180 \pm 50GF$
  7. CONTACT RESISTANCE: 50mOHMS MAX. (INITIAL)
  8. ELECTRICAL LIFE: >10,000 CYCLES
  9. ▲ DENOTES CRITICAL PARAMETER
  10. 2002/95/EC (ROHS) COMPLIANT

**E-SWITCH®**

TITLE TL2201OAZA1DRED

A	16187	NEW PART RELEASE	6/30/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	6/30/2006	CT	XP0290A	A