



SHEET 1 OF 1

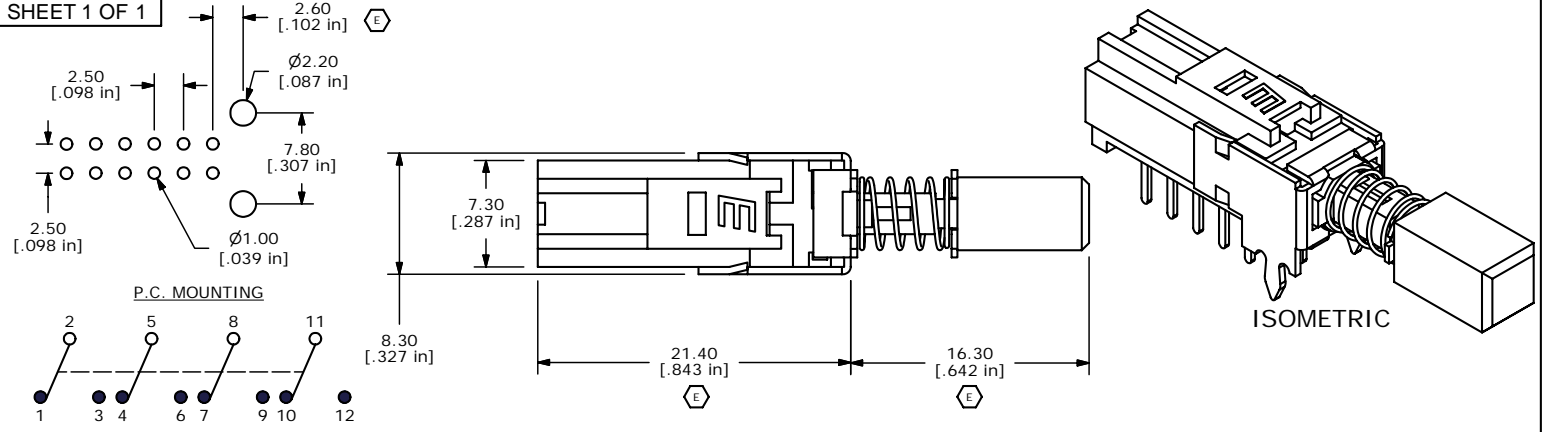

CIRCUIT: 4PDT

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  4. RATING 0.1A @30V DC
  5. MATERIALS:  
CONTACT/TERMINALS: SILVER PLATE  
HOUSING: PBT UL94HB  
BASE: PA66 UL94HB  
ACTUATOR: POM  
CAP: ABS UL94V0
  6. CONTACT RESISTANCE: 100 mΩ (INITIAL)
  7. TIMING: NON-SHORTING
  8. OPERATING FORCE: 280±50GF
  9. TRAVEL: LATCHING  
2MM TO LOCK  
3MM OVERALL
  10. ELECTRICAL LIFE: 10000 CYCLES
  11. OPERATING TEMP: -20°C TO +70°C
  11. 2002/95/EC (ROHS) COMPLIANT
  13. ▲ DENOTES CRITICAL PARAMETER.

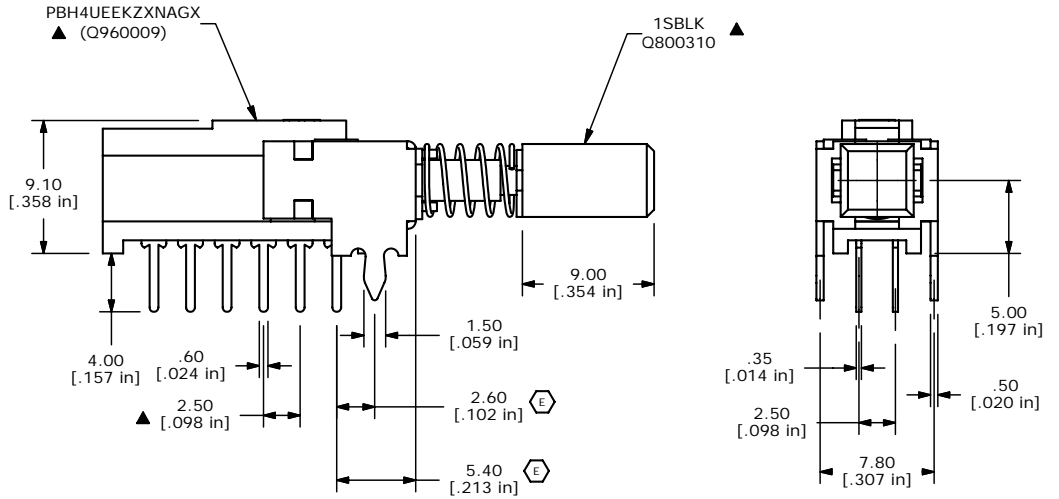

REV	PCR NO	DESCRIPTION	DATE	BY
E	15942	MOVE KZX 0.45MM CLOSER TO SWITCH	4/4/06	BK
D	15681	ADD CRITICAL TO 2.50 DIM	1/16/06	PH
C	15336	ADDED ROHS NOTE, EDIT PC MOUNT.	9/27/05	PH
B	15260	REVISED CAP DESCRIPTION, NOTE 5	9/8/05	PH
A	15208	RELEASED FOR PRODUCTION	8/26/05	PH

<b>E-SWITCH®</b>				
TITLE PBH4UEEKZXNAG1SBLK				
SCALE 2.5:1	DATE 08/26/05	DR PH	DWG XQ0011P	REV E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED