




ISOMETRIC

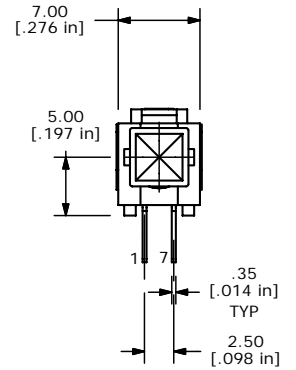

CIRCUIT: 6PDT

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  4. RATING 0.1A @30V DC
  - ▲5. MATERIALS:  
CONTACT/TERMINALS: SILVER PLATE  
HOUSING: PBT UL94HB  
BASE: PA66 UL94HB  
ACTUATOR: POM  
CAP: ABS UL94V0
  6. CONTACT RESISTANCE: 100 MILLI-OHM (INITIAL)
  - ▲7. TIMING: NON-SHORTING
  8. OPERATING FORCE: 380±50GF
  9. TRAVEL: LATCHING  
2MM TO LOCK  
3MM OVERALL
  10. ELECTRICAL LIFE: 10000 CYCLES
  11. OPERATING TEMP: -20°C TO +70°C
  12. 2002/95/EC (ROHS) COMPLIANT
  13. ▲DENOTES CRITICAL PARAMETER.

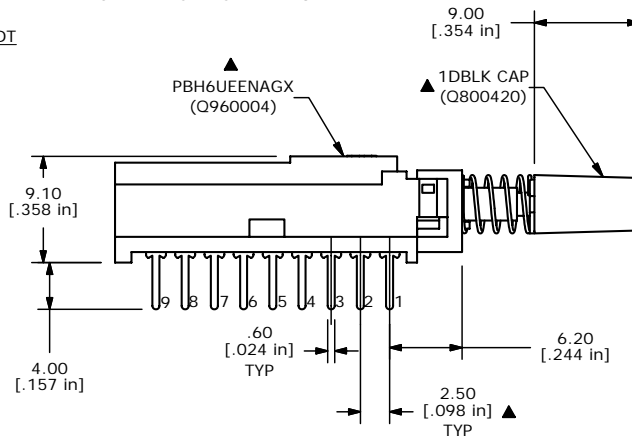

C	15681	DIM FROM 15.80 TO 15.20	1/16/06	PH
B	15553	DIMS FROM 7.00, 0.90	11/21/05	PH
A	15445	RELEASED FOR PRODUCTION	10/25/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE PBH6UEENAG1DBLK				
SCALE 2:1	DATE 10/25/2005	DR PH	DWG XQ0015P	REV C