Converter - Brake - Inverter Module (CBI2)

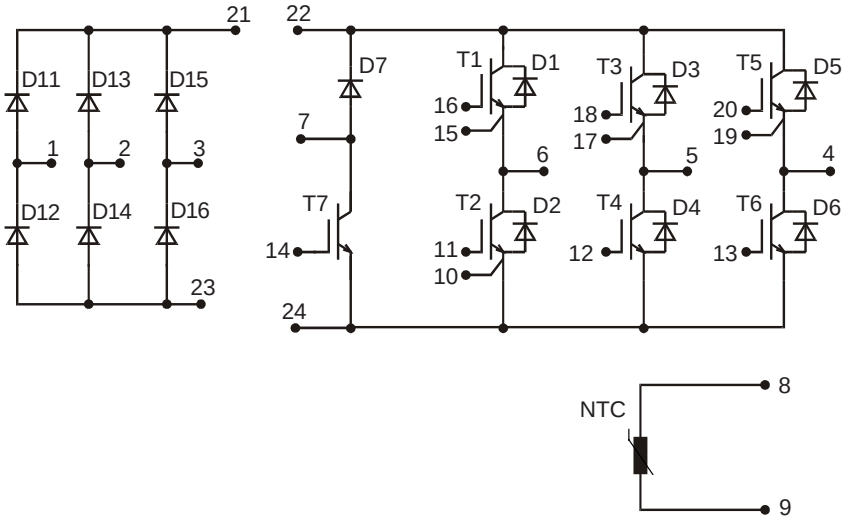

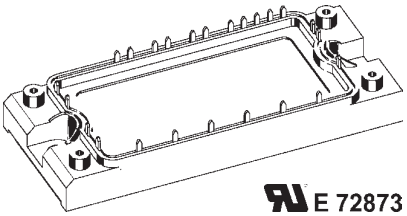

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
V_{RRM} = 1600V	V_{CES} = 600 V	V_{CES} = 600 V
I_{DAVM} = 26 A	I_{C25} = 20 A	I_{C25} = 20 A
I_{FSM} = 160 A	$V_{CE(sat)}$ = 1.9 V	$V_{CE(sat)}$ = 1.9 V

Input Rectifier Bridge D11 - D16

Symbol	Conditions	Maximum Ratings	
V_{RRM}		1600	V
I_{FAV}	T_C = 80°C; sine 180°	19	A
I_{DAVM}	T_C = 80°C; rectangular; d = 1/3	18	A
I_{FSM}	T_{VJ} = 25°C; t = 10 ms; sine 50 Hz	160	A
P_{tot}	T_C = 25°C	85	W

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
V_F	I_F = 10 A; T_{VJ} = 25°C		1.3	1.6	V
	T_{VJ} = 125°C		1.3		V
I_R	$V_R = V_{RRM}$; T_{VJ} = 25°C			0.1	mA
	T_{VJ} = 125°C		1		mA
t_{rr}	V_R = 100 V; I_F = 10 A; di/dt = -10 A/µs		1		µs
R_{thJC}	(per diode)			1.47	K/W

Application: AC motor drives with

- Input from single or three phase grid
- Three phase synchronous or asynchronous motor
- electric braking operation

Features

- High level of integration - only one power semiconductor module required for the whole drive
- Fast rectifier diodes for enhanced EMC behaviour
- NPT IGBT technology with low saturation voltage, low switching losses, high RBSOA and short circuit ruggedness
- Epitaxial free wheeling diodes with Hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

203

© 2002 IXYS All rights reserved

IXYS reserves the right to change limits, test conditions and dimensions.

IXYS Semiconductor GmbH
Edisonstr. 15, D-68623 Lampertheim
Phone: +49-6206-503-0, Fax: +49-6206-503627

IXYS Corporation
3540 Bassett Street, Santa Clara CA 95054
Phone: (408) 982-0700, Fax: 408-496-0670

Downloaded from Elcodis.com electronic components distributor

Output Inverter T1 - T6

Symbol	Conditions	Maximum Ratings	
V_{CES}	T_{VJ} = 25°C to 150°C	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	20	A
I_{C80}	T_C = 80°C	15	A
RBSOA	V_{GE} = ±15 V; R_G = 82 Ω; T_{VJ} = 125°C Clamped inductive load; L = 100 µH	I_{CM} = 20 $V_{CEK} \leq V_{CES}$	A
t_{SC} (SCSOA)	V_{CE} = V_{CES}; V_{GE} = ±15 V; R_G = 82 Ω; T_{VJ} = 125°C non-repetitive	10	µs
P_{tot}	T_C = 25°C	85	W

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
$V_{CE(sat)}$	I_C = 10 A; V_{GE} = 15 V; T_{VJ} = 25°C		1.9	2.3	V
	T_{VJ} = 125°C		2.1		V
$V_{GE(th)}$	I_C = 0.4 mA; V_{GE} = V_{CE}	4.5		6.5	V
I_{CES}	V_{CE} = V_{CES}; V_{GE} = 0 V; T_{VJ} = 25°C			0.6	mA
	T_{VJ} = 125°C		0.4		mA
I_{GES}	V_{CE} = 0 V; V_{GE} = ± 20 V			200	nA
$t_{d(on)}$	Inductive load, T_{VJ} = 125°C V_{CE} = 300 V; I_C = 10 A V_{GE} = ±15 V; R_G = 82 Ω		35		ns
t_r			35		ns
$t_{d(off)}$			230		ns
t_f			30		ns
E_{on}			0.4		mJ
E_{off}			0.3		mJ
C_{ies}	V_{CE} = 25 V; V_{GE} = 0 V; f = 1 MHz		600		pF
Q_{Gon}	V_{CE}= 300V; V_{GE} = 15 V; I_C = 10 A		39		nC
R_{thJC}	(per IGBT)			1.5	K/W

Output Inverter D1 - D6

Symbol	Conditions	Maximum Ratings	
I_{F25}	T_C = 25°C	30	A
I_{F80}	T_C = 80°C	20	A

Symbol	Conditions	Characteristic Values min.	typ.	max.	
V_F	I_F = 10 A; V_{GE} = 0 V; T_{VJ} = 25°C		1.7	2.0	V
	T_{VJ} = 125°C		1.2		V
I_{RM}	I_F = 15 A; di_F/dt = -400 A/µs; T_{VJ} = 125°C V_R = 300 V; V_{GE} = 0 V		13		A
t_{rr}			90		ns
R_{thJC}	(per diode)			2.1	K/W

Equivalent Circuits for Simulation

Conduction



D11 - D16

Rectifier Diode (typ. at T_J = 125°C)
V_0 = 1.11V; R_0 = 19 mΩ

T1 - T6 / D1 - D6

IGBT (typ. at V_{GE} = 15 V; T_J = 125°C)
V_0 = 0.89 V; R_0 = 122 mΩ

Free Wheeling Diode (typ. at T_J = 125°C)
V_0 = 1.09 V; R_0 = 12 mΩ

T7 / D7

IGBT (typ. at V_{GE} = 15 V; T_J = 125°C)
V_0 = 0.89 V; R_0 = 122 mΩ

Free Wheeling Diode (typ. at T_J = 125°C)
V_0 = 1.07 V; R_0 = 23 mΩ

Thermal Response

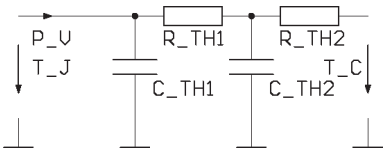

D11 - D16

Rectifier Diode (typ.)
C_{th1} = 0.093 J/K; R_{th1} = 1.212 K/W
C_{th2} = 0.778 J/K; R_{th2} = 0.258 K/W

T1 - T6 / D1 - D6

IGBT (typ.)
C_{th1} = 0.065 J/K; R_{th1} = 1.766 K/W
C_{th2} = 0.636 J/K; R_{th2} = 0.344 K/W

Free Wheeling Diode (typ.)
C_{th1} = 0.065 J/K; R_{th1} = 1.766 K/W
C_{th2} = 0.636 J/K; R_{th2} = 0.344 K/W

T7 / D7

IGBT (typ.)
C_{th1} = 0.071 J/K; R_{th1} = 1.211 K/W
C_{th2} = 0.726 J/K; R_{th2} = 0.293 K/W

Free Wheeling Diode (typ.)
C_{th1} = 0.043 J/K; R_{th1} = 2.738 K/W
C_{th2} = 0.54 J/K; R_{th2} = 0.462 K/W

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Brake Chopper T7

Symbol	Conditions	Maximum Ratings	
V_{CES}	T_{VJ} = 25°C to 150°C	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	20	A
I_{C80}	T_C = 80°C	15	A
RBSOA	V_{GE} = ±15 V; R_G = 82 Ω; T_{VJ} = 125°C Clamped inductive load; L = 100 µH	I_{CM} = 20 $V_{CEK} \leq V_{CES}$	A
t_{SC} (SCSOA)	V_{CE} = V_{CES}; V_{GE} = ±15 V; R_G = 82 Ω; T_{VJ} = 125°C non-repetitive	10	µs
P_{tot}	T_C = 25°C	85	W

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
$V_{CE(sat)}$	I_C = 10 A; V_{GE} = 15 V; T_{VJ} = 25°C		1.9	2.3	V
	T_{VJ} = 125°C		2.1		V
$V_{GE(th)}$	I_C = 0.4 mA; V_{GE} = V_{CE}	4.5		6.5	V
I_{CES}	V_{CE} = V_{CES}; V_{GE} = 0 V; T_{VJ} = 25°C			0.5	mA
	T_{VJ} = 125°C		0.3		mA
I_{GES}	V_{CE} = 0 V; V_{GE} = ± 20 V			200	nA
$t_{d(on)}$	Inductive load, T_{VJ} = 125°C V_{CE} = 300 V; I_C = 10 A V_{GE} = ±15 V; R_G = 82 Ω		40		ns
t_r			40		ns
$t_{d(off)}$			230		ns
t_f			30		ns
E_{on}			0.4		mJ
E_{off}			0.3		mJ
C_{ies}	V_{CE} = 25 V; V_{GE} = 0 V; f = 1 MH z		600		pF
Q_{Gon}	V_{CE}= 300 V; V_{GE} = 15 V; I_C = 10 A		39		nC
R_{thJC}				1.5	K/W

Brake Chopper D7

Symbol	Conditions	Maximum Ratings	
V_{RRM}	T_{VJ} = 25°C to 150°C	600	V
I_{F25}	T_C = 25°C	20	A
I_{F80}	T_C = 80°C	15	A

Symbol	Conditions	Characteristic Values min.	typ.	max.	
V_F	I_F = 10 A; T_{VJ} = 25°C			2.1	V
	T_{VJ} = 125°C		1.3		V
I_R	V_R = V_{RRM}; T_{VJ} = 25°C			0.06	mA
	T_{VJ} = 125°C		0.07		mA
I_{RM}	I_F = 10 A; di_F/dt = -400 A/µs; T_{VJ} = 125°C		11		A
t_{rr}	V_R = 300 V		80		ns
R_{thJC}				3.2	K/W

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Temperature Sensor NTC

Symbol	Conditions	Characteristic Values min.	typ.	max.	
R_{25}	T = 25°C	4.75	5.0	5.25	kΩ
$B_{25/50}$			3375		K

Module

Symbol	Conditions	Maximum Ratings	
T_{VJ}	Operating	-40...+125	°C
T_{JM}		150	°C
T_{stg}		-40...+125	°C
V_{ISOL}	I_{ISOL} ≤ 1 mA; 50/60 Hz	2500	V~
M_d	Mounting torque (M5)	2.7 - 3.3	Nm

Symbol	Conditions	Characteristic Values min.	typ.	max.	
$R_{pin-chip}$			5		mΩ
d_S	Creepage distance on surface	6			mm
d_A	Strike distance in air	6			mm
R_{thCH}	with heatsink compound		0.02		K/W
Weight			180		g

Dimensions in mm (1 mm = 0.0394")

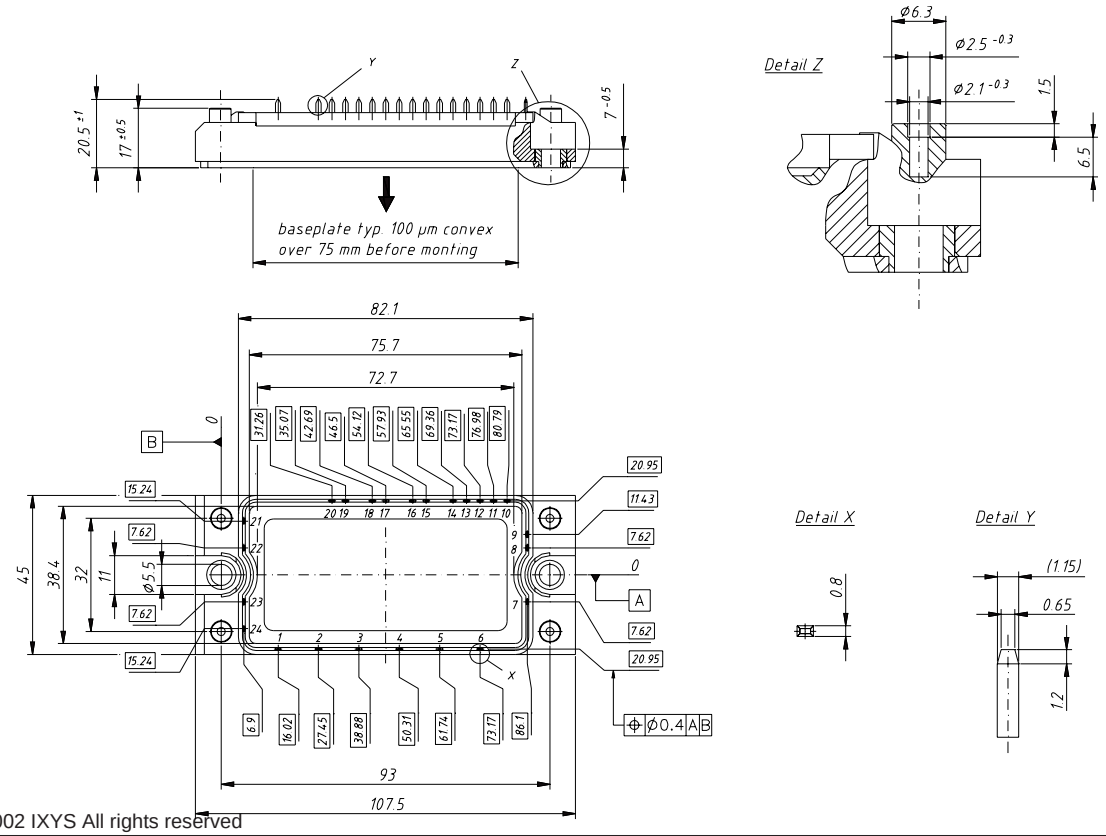

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Input Rectifier Bridge D11 - D16

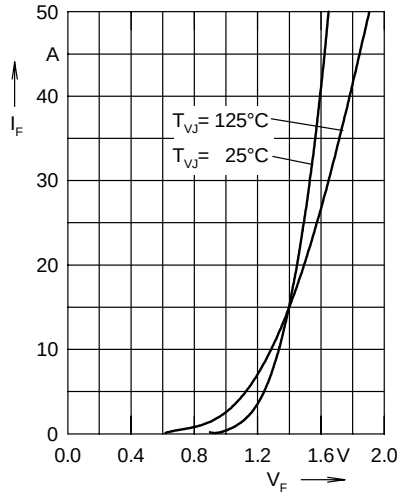

Fig. 1 Forward current versus voltage drop per diode

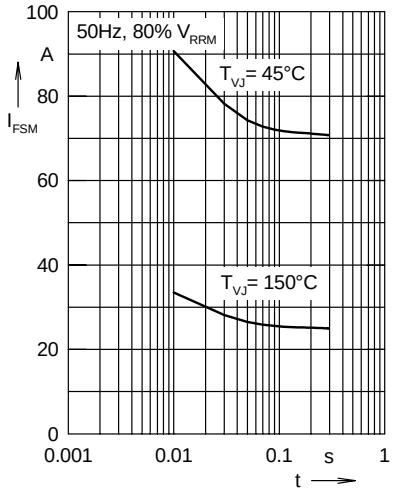

Fig. 2 Surge overload current

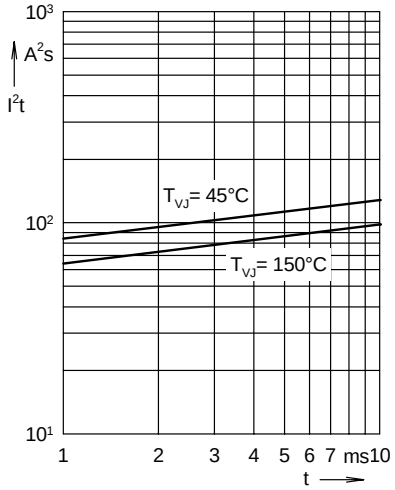

Fig. 3 I^2t versus time per diode

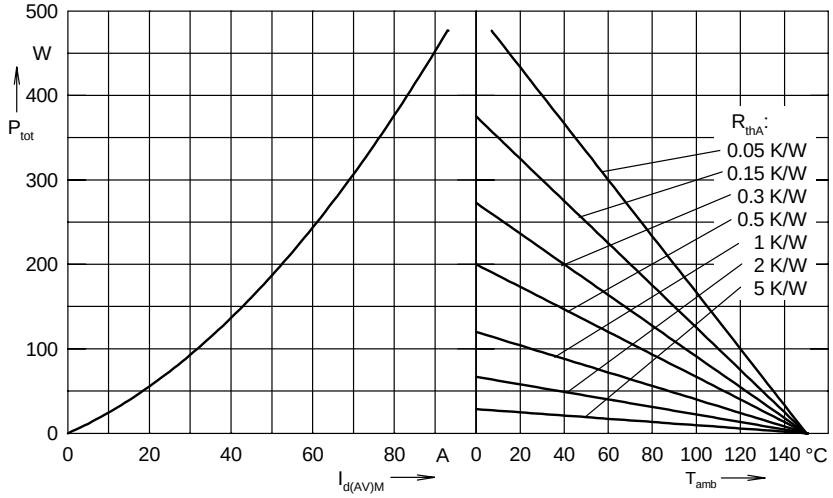

Fig. 4 Power dissipation versus direct output current and ambient temperature, sin 180°

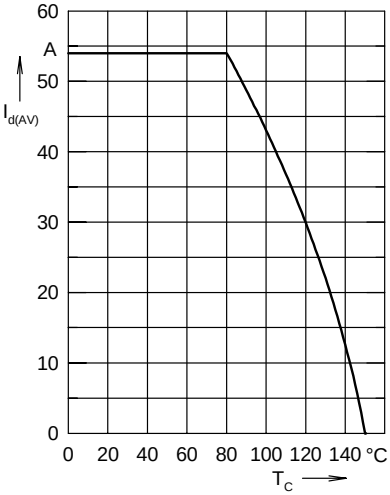

Fig. 5 Max. forward current versus case temperature

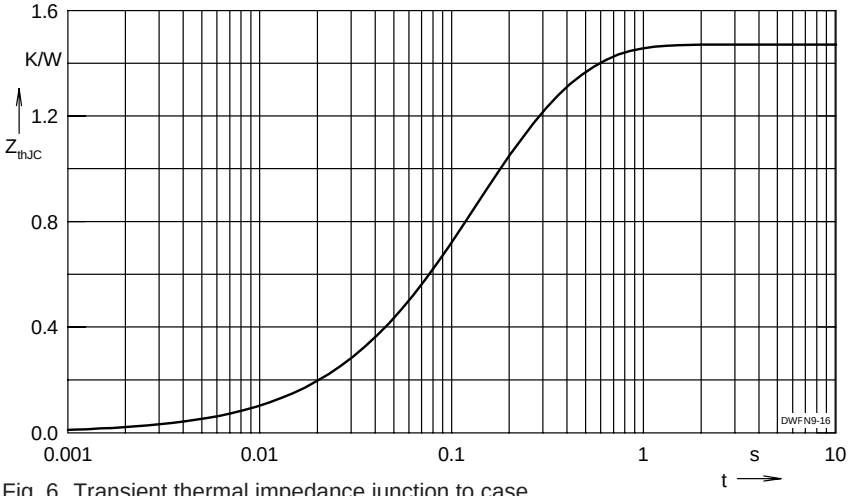

Fig. 6 Transient thermal impedance junction to case

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Output Inverter T1 - T6 / D1 - D6

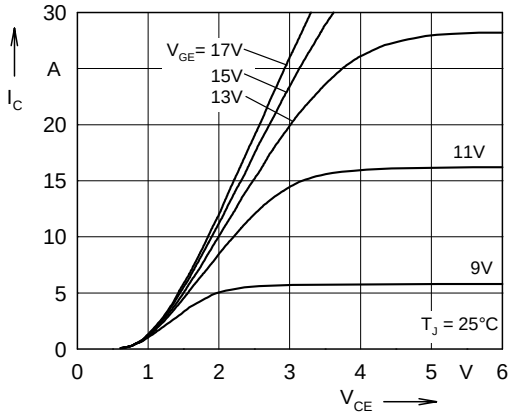

Fig. 7 Typ. output characteristics

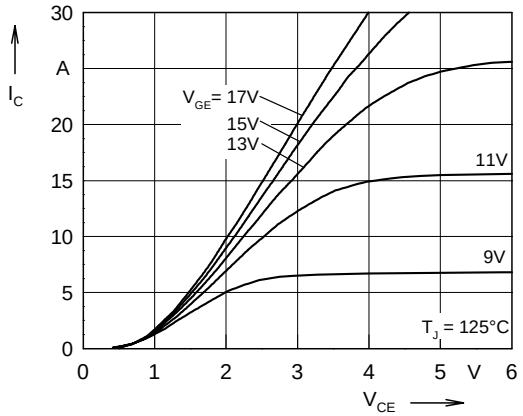

Fig. 8 Typ. output characteristics

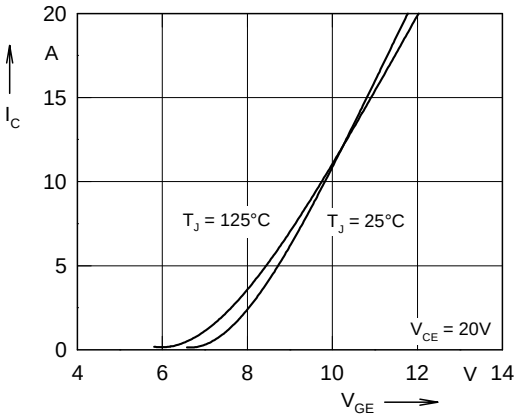

Fig. 9 Typ. transfer characteristics

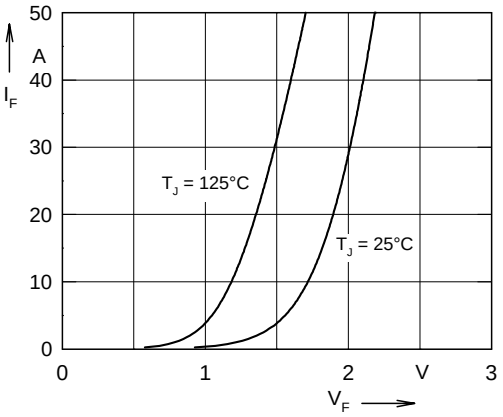

Fig. 10 Typ. forward characteristics of free wheeling diode

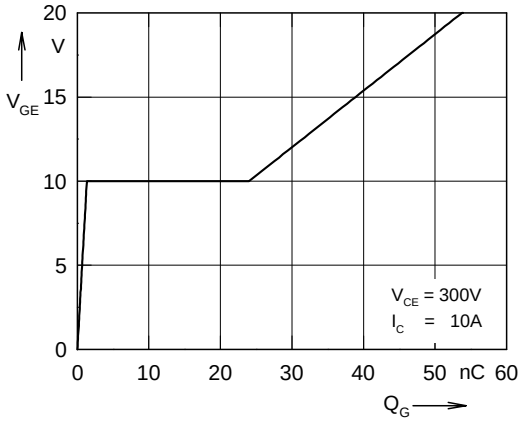

Fig. 11 Typ. turn on gate charge

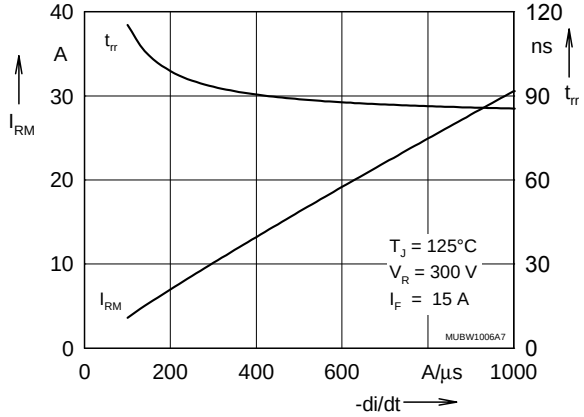

Fig. 12 Typ. turn off characteristics of free wheeling diode

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Output Inverter T1 - T6 / D1 - D6

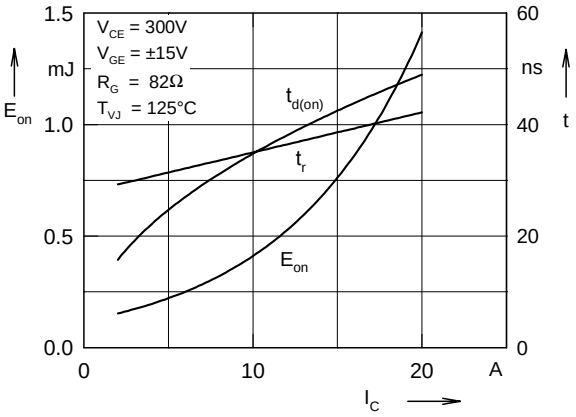

Fig. 13 Typ. turn on energy and switching times versus collector current

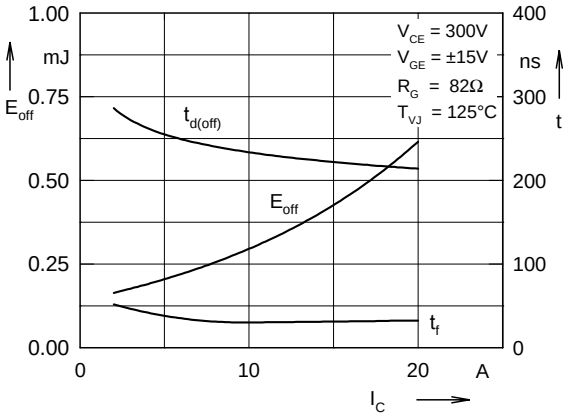

Fig. 14 Typ. turn off energy and switching times versus collector current

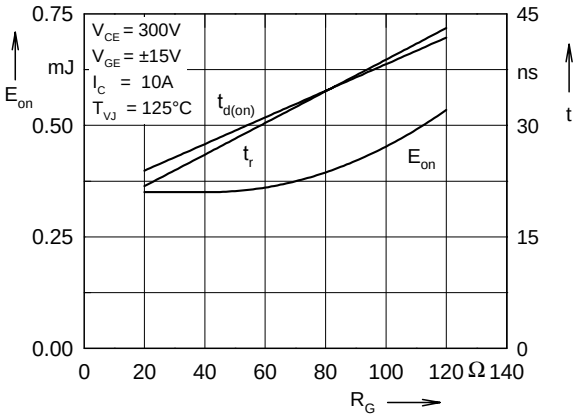

Fig. 15 Typ. turn on energy and switching times versus gate resistor

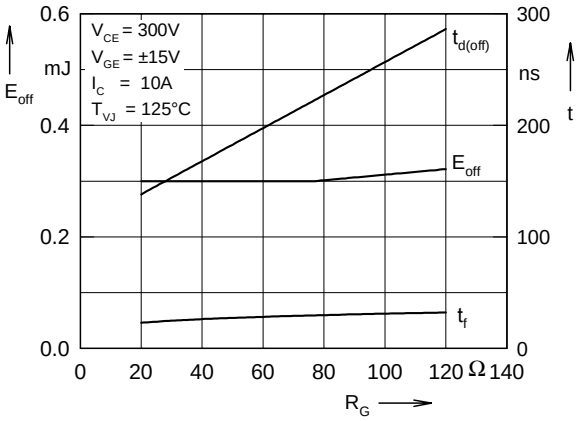

Fig.16 Typ. turn off energy and switching times versus gate resistor

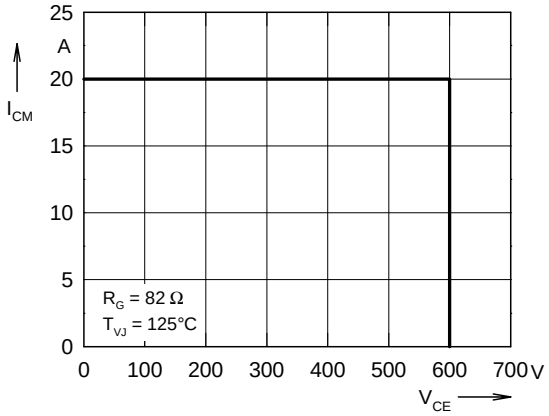

Fig. 17 Reverse biased safe operating area RBSOA

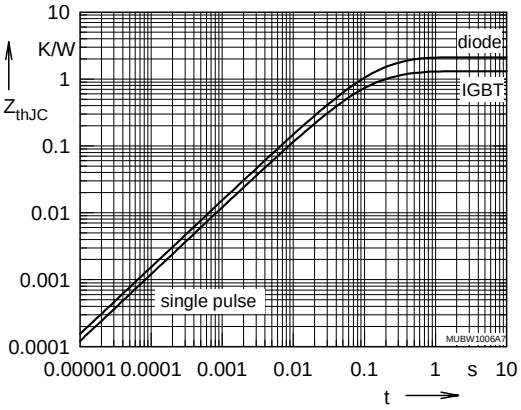

Fig. 18 Typ. transient thermal impedance

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Brake Chopper T7 / D7

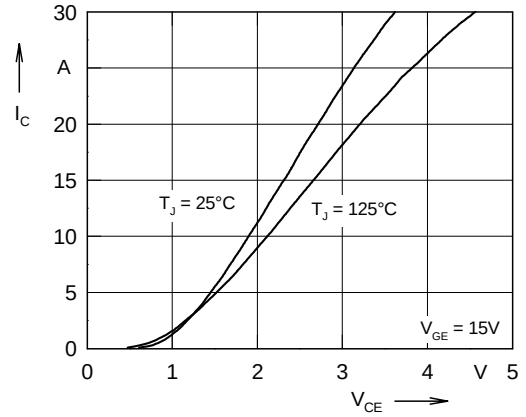

Fig. 19 Typ. output characteristics

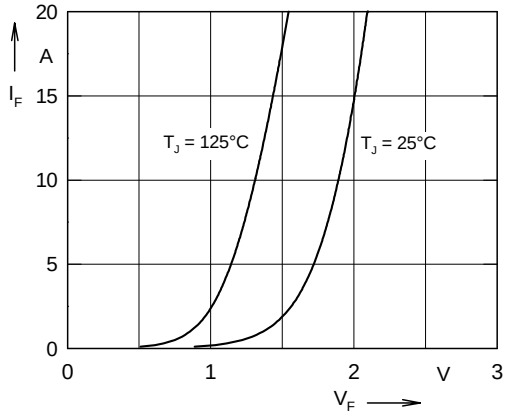

Fig. 20 Typ. forward characteristics of free wheeling diode

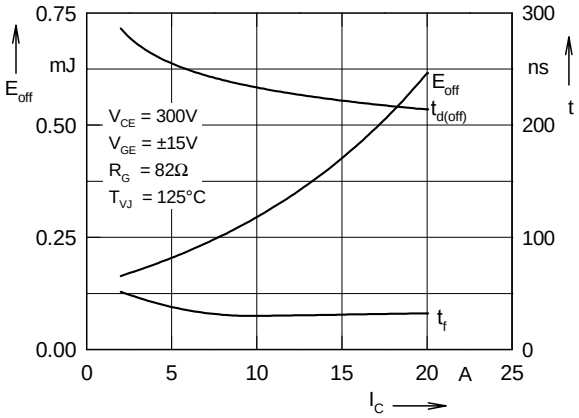

Fig. 21 Typ. turn off energy and switching times versus collector current

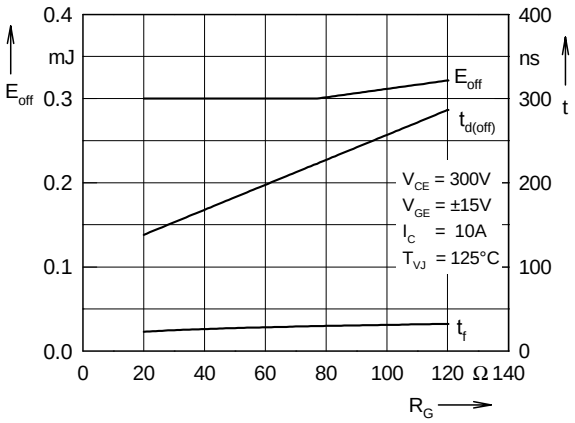

Fig. 22 Typ. turn off energy and switching times versus gate resistor

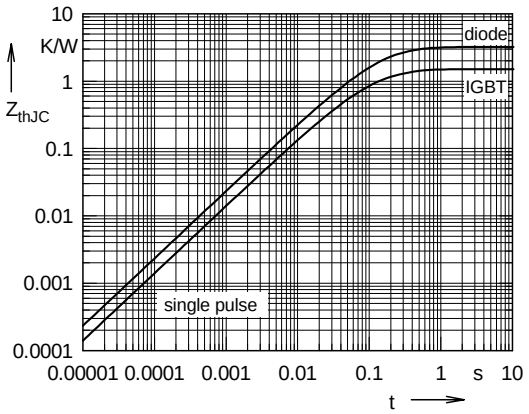

Fig. 23 Typ. transient thermal impedance

Temperature Sensor NTC

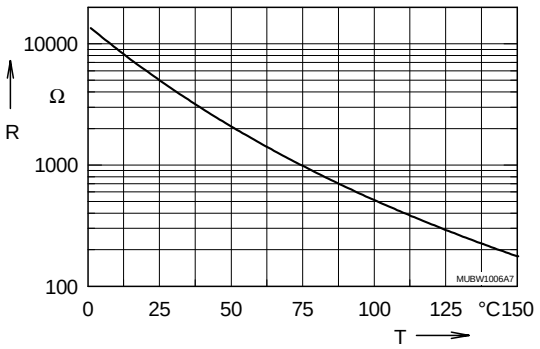

Fig. 24 Typ. thermistorresistance versus temperature

© 2002 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor