



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

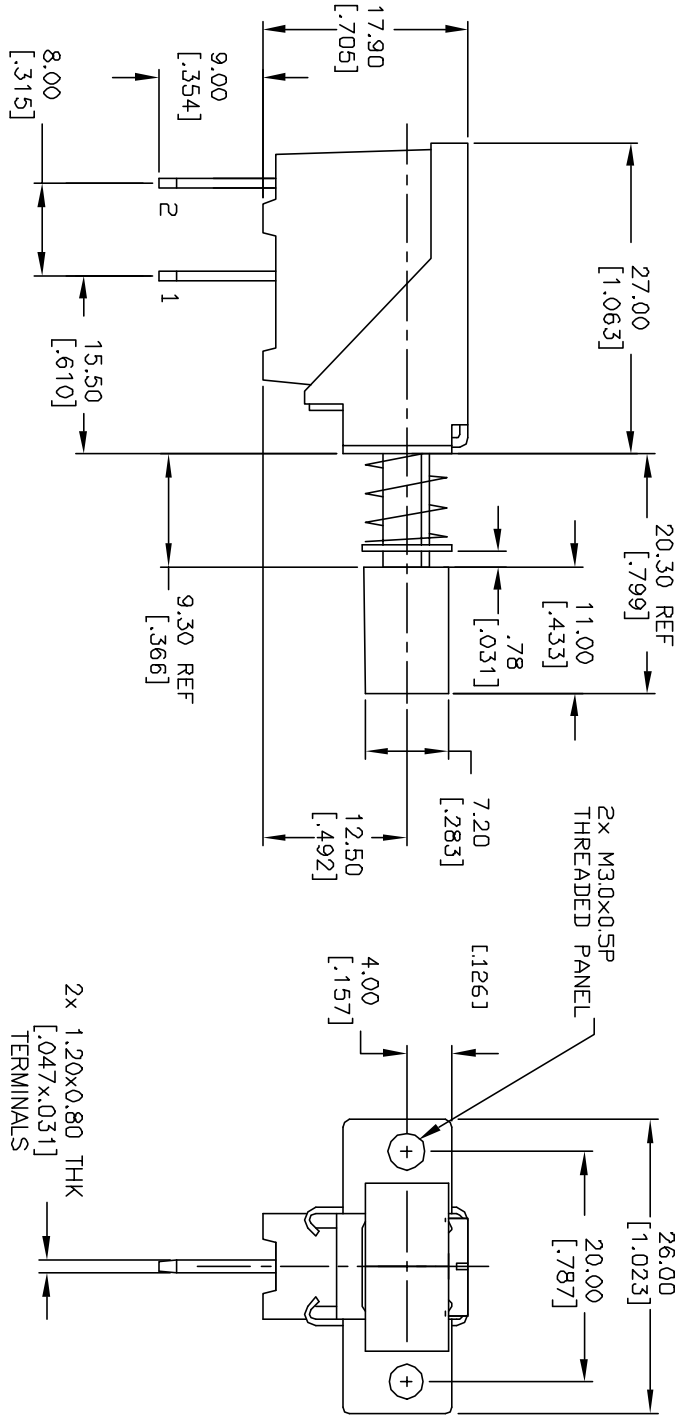

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERMINAL NOS FOR REF ONLY.
 4. RATING: AC 250V 5A/80A, TV-5
 5. CONTACT RESISTANCE: 100m Ohms MAX. (AT DC 5V@1A)
 6. DIELECTRIC STRENGTH: AC 1000V FOR 1 MIN.
 7. OPERATING FORCE: 350±100gf
 8. TRAVEL: FULL STROKE: 3.5±0.5/-0mm
LOCK STROKE: 2.5±0.5mm

E-SWITCH®

TITLE		P197 EE PB /TAB-GRY	
REV.	ECN No.	DATE	CHKD
A	11780	10/23/01	CJC
RELEASED FOR PRODUCTION		DATE	CHKD
DESCRIPTION		DATE	CHKD
P197 EE PB /TAB-GRY		10/23/01	CJC
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED		SCALE	DATE
		1.5:1	10/23/01
		DR	DWG
		CJC	XP02229A
		REV	A