




- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - CONTACT RATING: CURRENT: 100mA
VOLTAGE: 30 VDC
 - OPERATING LIFE: 50,000 MAKE-AND-BREAK CYCLES
 - INSULATION RESISTANCE: 500VDC, 100M OHM. MIN.
 - OPERATING FORCE: 250gf ± 100 GRAMS
 - OPERATING TEMP.: -20°C to 70°C
 - TRAVEL: 1.00 ± 0.3mm LOCK
1.50 ± 0.3mm FULL TRAVEL
 - CONTACT RESISTANCE: 50 m OHM. MAX.
 - ▲ DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (ROHS) COMPLIANT
 - ▲ LED COLOR: BLUE

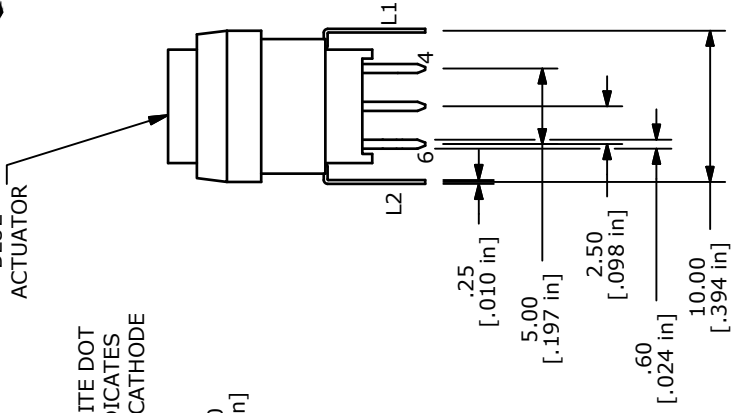

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	5
FORWARD VOLTAGE @20mA	V	2.9-4.0
LUMINOUS INTENSITY @ 10mA	MCD	9 @ 5mA



TITLE LP4EE1PBABB

B	19603	DRAWING UPDATE	1/19/11	BGL
A	18684	RELEASE FOR PRODUCTION	10/14/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	2 = 1	DATE	10/14/2009	DR	BLR	DWG	B240032	REV	B
-------	-------	------	------------	----	-----	-----	---------	-----	---