


Compact Push Type Power Switches

Malaysia

Series: **R1**
 Type: **ESB92S**

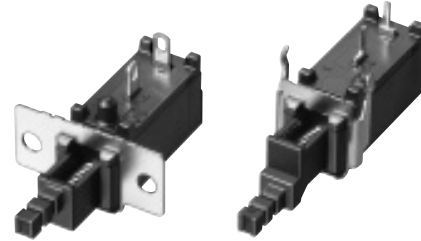

High reliability type (applicable to wide range purposes)


■ Features

- Power switches exclusively for SPST use
- Withstands inrush current up to 128 A
- Special heat resistant structure
- Meets the world's major safety standards
- Rapid switching structure, applicable to IEC60065 6th edition (Refer to the notes.)
- Cadmium-free contact

■ Recommended Applications

- AV Equipment: TVs and audio systems
- OA Equipment: PCs, monitors, printers, etc.

■ Explanation of Part Numbers

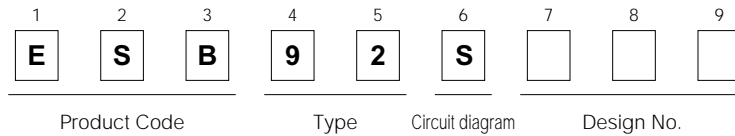

■ Specifications

Rating	TV-5, 5 A 250 Vac (UL, CSA) 4 A/128 A 250 Vac (European standards)		
Safety Standards	UL, CSA, VDE, BEAB, SEMKO, FIMKO, SEV, DEMKO, NEMKO		
Circuit Diagram	SPST		
Operating Force	Circuit	Lock Travel	
		1.5 mm	2.5 mm
	SPST	6.0 N±2.0 N	6.0 N±2.0 N
Travel	Lock Travel: 2.5 mm, Full Travel: 3.5 mm		
	Lock Travel: 1.5 mm, Full Travel: 2.5 mm		
Minimum Quantity/Packing Unit	50 pcs. Polyethylene Bag (Bulk)		
Quantity/Carton	600 pcs.		

* OA equipment: PCs, monitors, printers, etc.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Dec. 2005

■ Dimensions in mm (not to scale)

No. 1

Solder lug type

Part No.	Travel		Circuit Diagram
	Lock	Full	
ESB92S27B	2.5 mm	3.5 mm	SPST
ESB92S17B	1.5 mm	2.5 mm	

No. 2

PWB mount type

Part No.	Travel		Circuit Diagram
	Lock	Full	
ESB92S21B	2.5 mm	3.5 mm	SPST
ESB92S11B	1.5 mm	2.5 mm	

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

