


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 7A@125V, 4A@250
VUL,CUL, & VDE APPROVED
5. CONTACT MATERIAL:
Terminals, Copper Alloy W/Silver plate.
Contacts, Copper Alloy W/Tin Oxide
6. CONTACT RESISTANCE: 100milli-ohms TYP. MAX Initial
7. DIELECTRIC STRENGTH: 1500V for 1min
3000V between poles
8. ELECTRICAL LIFE: 6,000 Cycles
9. OPERATING FORCE: 550±150gf TYP.
10. TRAVEL: FULL:5.5, LOCK:4.0
11. 2002/95/EC (ROHS) COMPLIANT

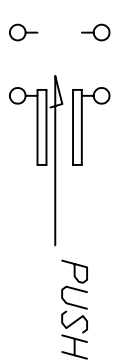

E-SWITCH®

P227EE1A20BTACGRY

B	16219	UPDATE CAP & ADD NOTE 11	7/6/06	MRM
A	14844	RELEASED FOR PRODUCTION	4/8/05	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

SCALE	1.5:1	DATE	4/8/05	DR	AR	DWG	XP02754	REV	B
TITLE	P227EE1A20BTACGRY								