


SERIES R6 SWITCHES

ROCKER SWITCHES

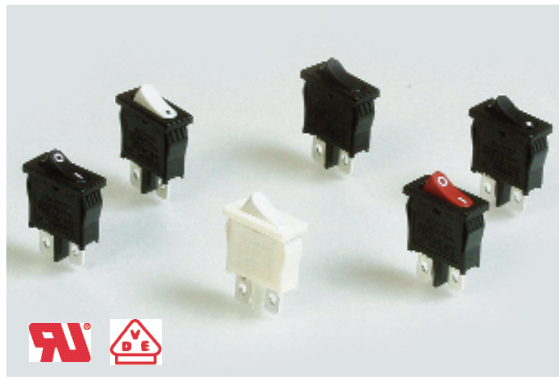

SPECIFICATIONS

Contact Rating:	10A@125 VAC, 6A@250 VAC (UL, CUL) 4(1)A @250 VAC (D, S, N, Fi, VDE)
Life Expectancy (Mechanical):	50,000 cycles
Life Expectancy (Electrical):	10,000 cycles
Contact Resistance:	<20 mΩ (Initial)
Insulation Resistance:	>1,000MΩ @ 500V DC
Dielectric Strength:	>1,500V AC 1 minute (Initial)
Operating Temp:	-20°C to 65°C

FEATURES & BENEFITS

- ▶ Slim-line package design


APPLICATIONS/MARKETS

- ▶ Audio/Visual
- ▶ Consumer Electronics
- ▶ Test/instrumentation

MATERIALS

Body:	Nylon 6/6 (UL94 V-2)
Rocker:	Nylon 6/6 (UL94 V-2)
Contact Surface:	Coin Silver
Terminal:	Silver plated copper alloy

HOW TO ORDER

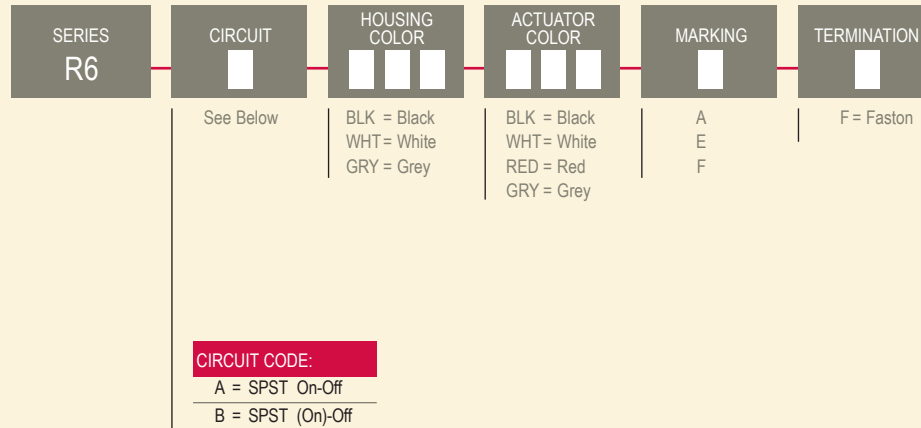

Example Ordering Number
R6-A-BLK-BLK-E-F

Specifications subject to change without notice.

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS