




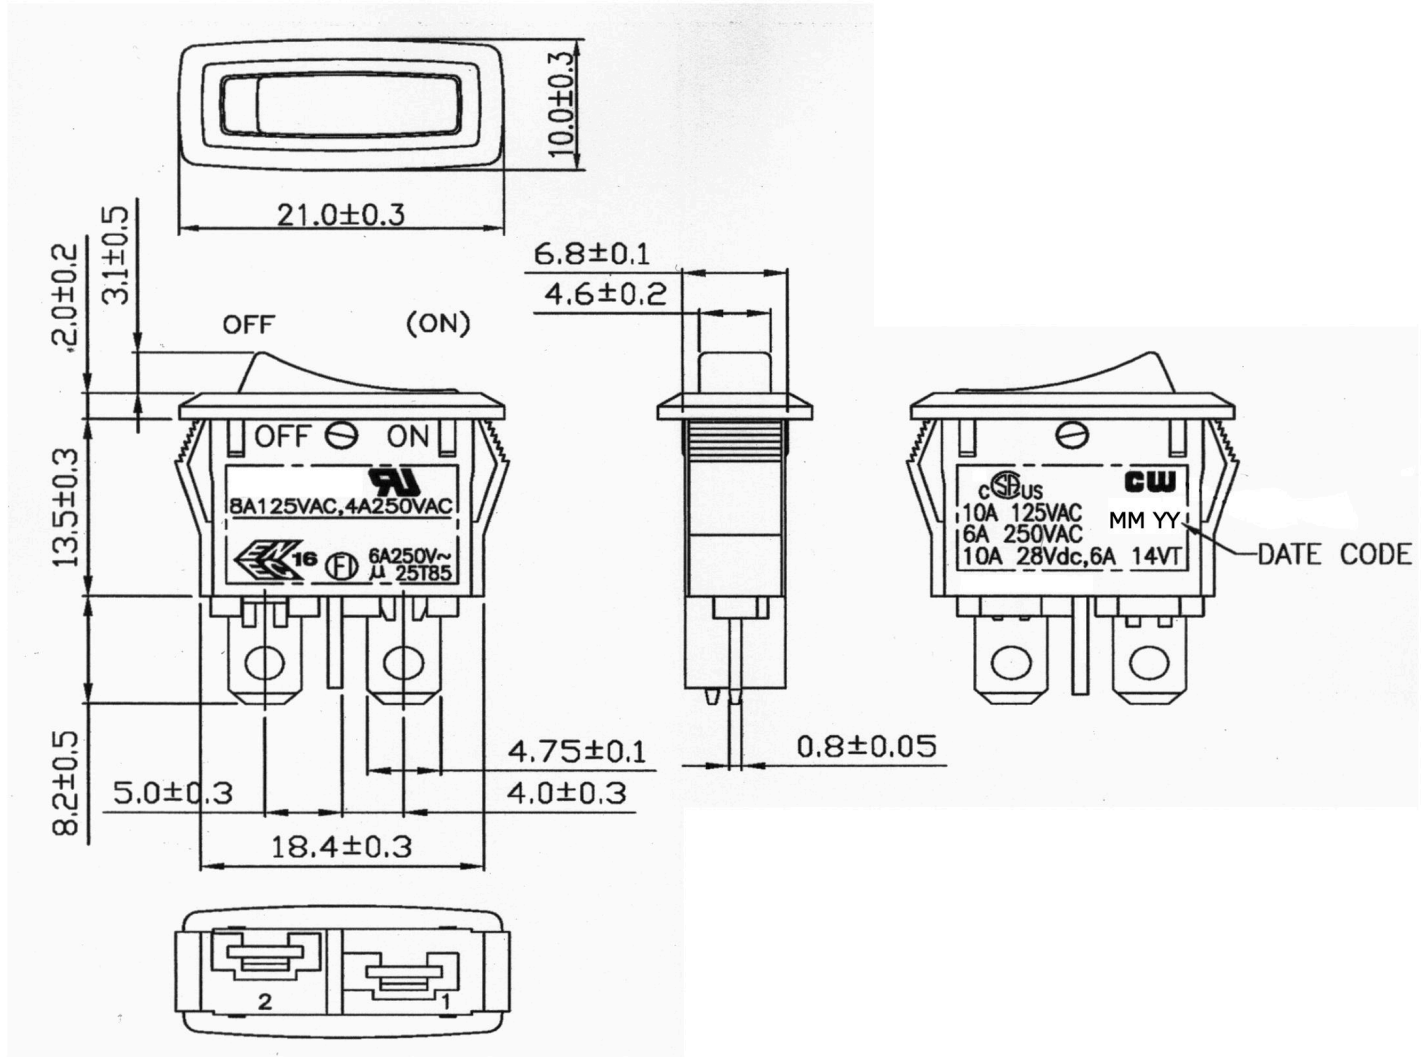



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	8A 125V AC, 4A 250V AC	 	Mounting Hole		 SPST (ON) - OFF () = Momentary												
	10A 125V AC, 6A 250V AC																
	10A 28V DC, 6A 14 VT																
6A 250V ~																	
Contact Resistance	50m ohm max.		<table border="1"> <thead> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75 - 1.25</td> <td>19.2 - 0.1</td> <td>7.0 + 0.1</td> </tr> <tr> <td>1.25 - 2.00</td> <td>19.4 - 0.1</td> <td>7.0 + 0.1</td> </tr> <tr> <td>2.00 - 3.00</td> <td>19.8 - 0.1</td> <td>7.0 + 0.1</td> </tr> </tbody> </table>		Thickness	X	Y	0.75 - 1.25	19.2 - 0.1	7.0 + 0.1	1.25 - 2.00	19.4 - 0.1	7.0 + 0.1	2.00 - 3.00	19.8 - 0.1	7.0 + 0.1	
Thickness	X	Y															
0.75 - 1.25	19.2 - 0.1	7.0 + 0.1															
1.25 - 2.00	19.4 - 0.1	7.0 + 0.1															
2.00 - 3.00	19.8 - 0.1	7.0 + 0.1															
Insulation Resistance	DC 500V 100M ohm min.																
Dielectric Strength	AC 1500V 1 minute																
Operating Temperature	-25°C ~ 85°C																

BASE COLOR: Black
 BUTTON COLOR: Black



RoHS Compliant

 Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 12/21/09	Rev. 0	Unit: mm	Checked By: G. Guld
	Title: ROCKER SWITCH		CW P/N: GRB243F02BB	