


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	20A 125V AC, 16A 250V AC		
Contact Resistance	50m ohm max.		
Insulation Resistance	DC 500V 100M ohm min.		
Dielectric Strength	AC 1500V 1 minute		
Operating Temperature	-25° C ~ 85° C		
Switch Function	2P SPST ON - OFF		

Cut-Out 1.0 ~ 3.0 mm thk.

**MATERIAL:**

**Frame: Nylon 66 (94 v-2), Black**  
**Actuator: Nylon 66 (94 v-2), Black**  
**Terminals: Silver plated Copper alloy.**  
**Printed: White, Hot stamping**

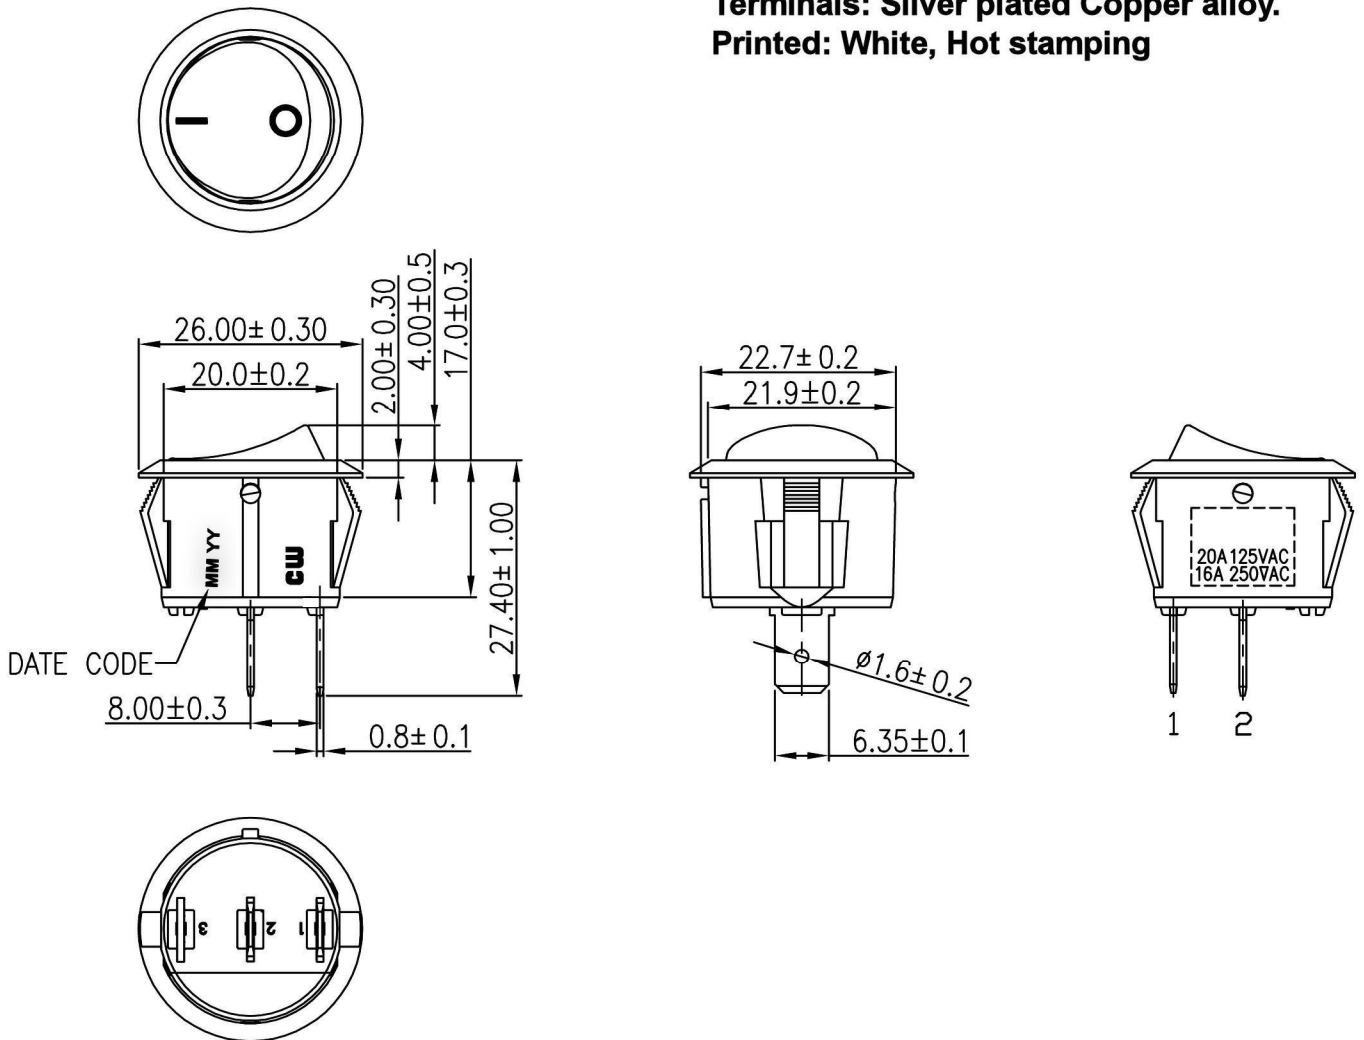

RoHS Compliant

**1** Revised 7/14/2010 - Added I O to button.

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 12/21/09

Rev. 1

Unit: mm

Checked By: **G.Guld**

Title: **ROCKER SWITCH**

CW P/N: **GRB293A01BB**