

SERIES 400A SWITCHES

ROCKER SWITCHES - PROCESS SEALED SUB-MINIATURE

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES



KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES


CAP OPTIONS

DPDT

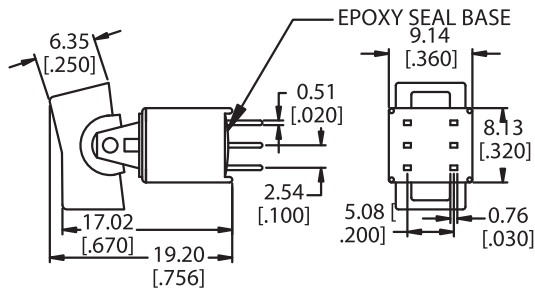

Model No.	POS 1	POS 2	POS 3
WMDP-1	ON	NONE	ON
WMDP-2	ON	NONE	(ON)
WMDP-3	ON	OFF	ON
Term. Comm.	2-3, 5-6	OPEN	2-1, 5-4


() = Momentary



SCHEMATIC

ACTUATOR OPTIONS

R1

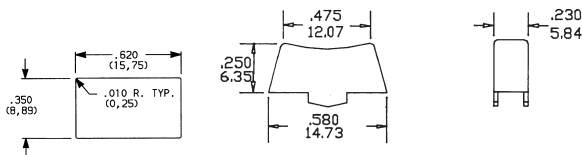


TERMINATION OPTIONS

M1


SOLDER LUG



Single Pole



Double Pole




M2


P.C. MOUNT



Single Pole



Double Pole








M6

SPDT



Single Pole

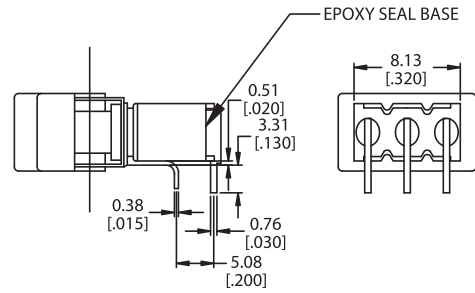




P.C. MOUNTING

M6

DPDT



Double Pole

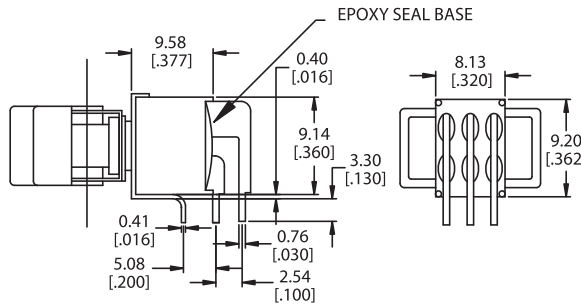




P.C. MOUNTING

M61

SPDT



Single Pole

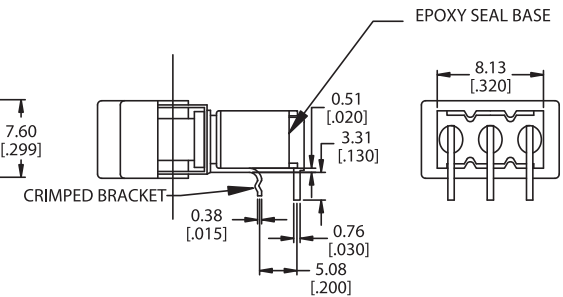




P.C. MOUNTING

M61

DPDT



Double Pole

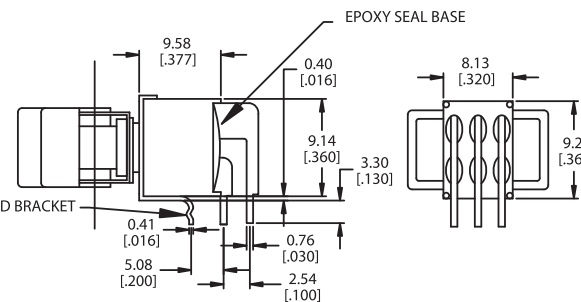

P.C. MOUNTING

M61 Termination includes crimped bracket

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS

SERIES 400A SWITCHES

ROCKER SWITCHES - PROCESS SEALED SUB-MINIATURE

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES



ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS

M7



SPDT

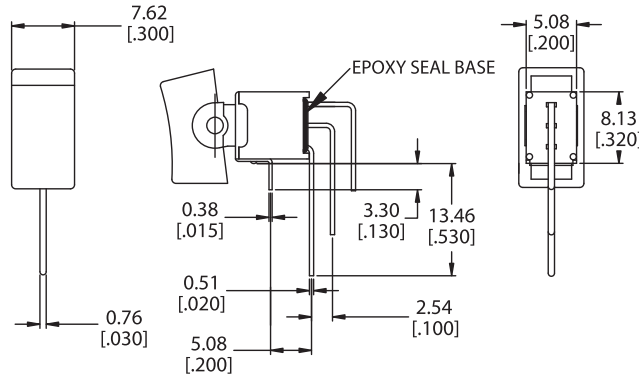

P.C. MOUNTING

M7



DPDT

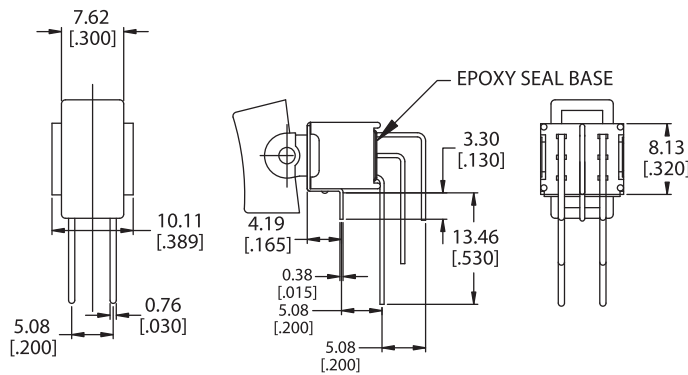

P.C. MOUNTING

M71

DPDT

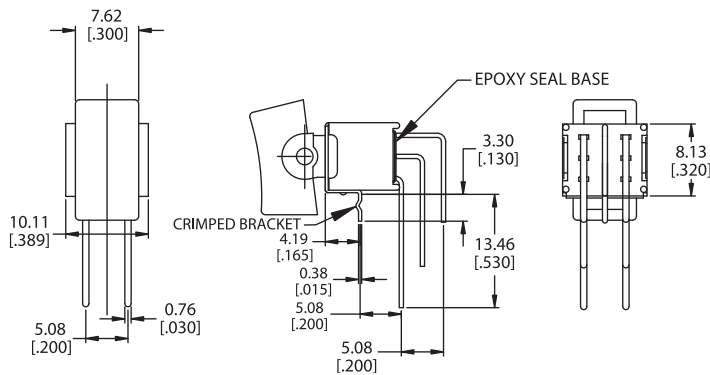




P.C. MOUNTING

M71 Termination includes crimped bracket



VS2




SPDT

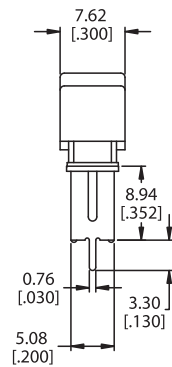

P.C. MOUNTING

VS2




DPDT

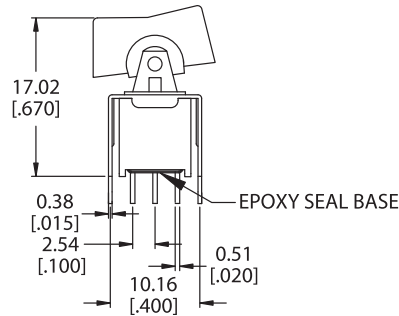

P.C. MOUNTING

VS21

DPDT

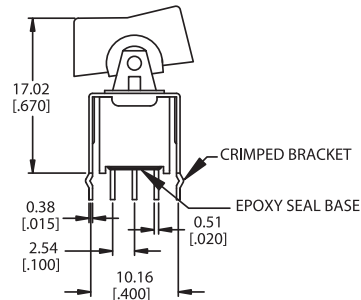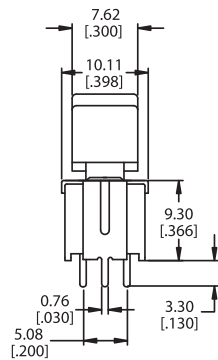

P.C. MOUNTING

CONTACT MATERIAL OPTIONS

Q

Fixed Terminal:	Silver plated copper alloy
Moving Contact:	Silver plated copper alloy
Rating:	3 AMPS @ 120 VAC or 28 VDC; 1.0 AMP @ 250VAC

R

Fixed Terminal:	Copper alloy with gold plate over nickel plate
Moving Contact:	Copper alloy with gold plate over nickel plate
Rating:	0.4 VA max. @ 20 VAC or DC max.