622/632-Series Miniature Rocker Switches

A high powered offering packed into a compact sized envelope, the 622/632-Series is a staple of the Appliance, Food Service, Transportation, and General Purpose markets. The silver-alloy butt contacts will handle inrush spikes up to 125 amps and steady state current to 16A 125VAC. The lighted 632-Series features a multitude of illumination circuit options available with LED, incandescent and neon style lamps.

Dielectric Strength
UL/CSA: 1000V - live to dead metal parts & opposite polarity
Electrical Life
50,000 cycles
Mechanical Life
100,000 cycles
Operating Temperature
32°F to 185°F (0°C to 85°C)

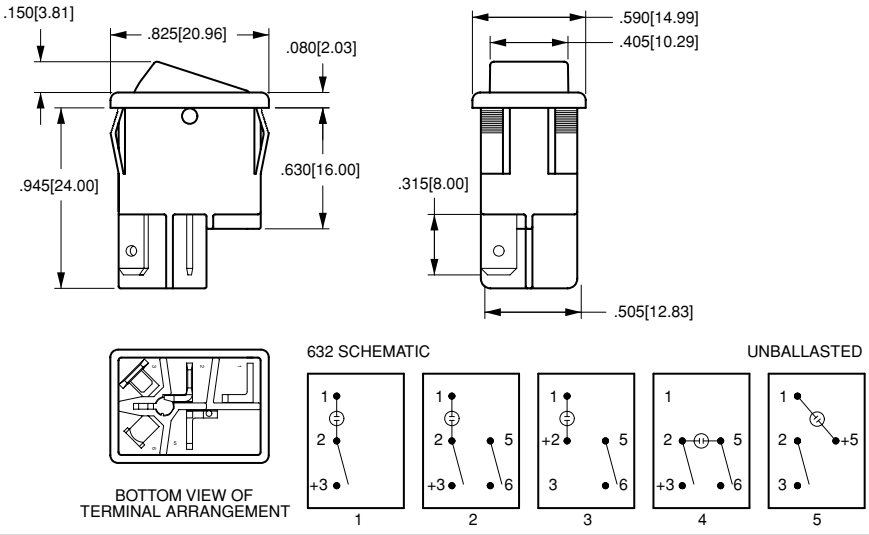

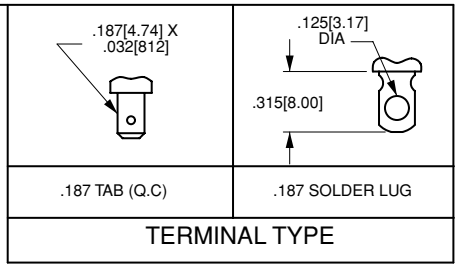



PANEL THICKNESS	A	B
.030[.76]-.050[1.27]	.508[12.90]	.756[19.20]
.050[1.27]-.078[1.98]	.508[12.90]	.764[19.40]
.078[1.98]-.125[3.17]	.508[12.90]	.780[19.81]

632121 - 1 B - K N

1 Base Part Number | 2 Actuator Color[4] | 3 Base Color | 4 Lamp[1] | 5 Legend

1 BASE PART NUMBER: SERIES/CIRCUITRY/RATING[2]/TERMINATION

8A 250VAC; 12A 125VAC; 1/2 HP 125-250VAC
622-SERIES NON-ILLUMINATED ROCKER

	Solder Lugs	.187 Tabs
ON-NONE-OFF (Single Pole)	**622121**	**622122**
ON-NONE-OFF (Double Pole)	**622221**	**622222**
632-SERIES ILLUMINATED ROCKER		
ON-NONE-OFF (Single Pole, dependent lamp) schematic 1	**632121**	**632122**
ON-NONE-OFF (Single Pole, independent lamp) schematic 3	**632321**	**632322**
ON-NONE-OFF (Single Pole, independent lamp unballasted) schematic 5	**632521**	**632522**
ON-NONE-OFF (Double Pole, dependent lamp w/ 5 terms.) schematic 2	**632221**	**632222**
ON-NONE-OFF (Double Pole, dependent lamp w/ 4 terms.) schematic 4	**632421**	**632422**

2 ACTUATOR COLOR[4]

622 (non illuminated)		*632 (illuminated)*	
B	black	**1**	clear amber
W	white	**2**	clear red
		3	clear blue[3]
		4	clear green
		5	clear

3 BASE COLOR[4]

B	black	**W**	white

4 LAMP VOLTAGE/STYLE[1]

N	622 (non illuminated)	**A**	6V incandescent
1	unballasted LED	**C**	12V incandescent
2	6V LED	**E**	18V incandescent
3	12V LED	**H**	24V incandescent
4	24V LED	**J**	125V neon
		K	250V neon

5 ROCKER LEGEND

	hot stamp
NO LEGEND	**N**
OFF-ON vertical	**A**
OFF-ON horizontal	**B**
I-O horizontal	**D**
I-O vertical	**E**
O on rocker radius	**F**

NOTES
1 For all incandescent or LED lamps specify 5 in 5th digit of part number. Example 632151-1B-CN
2 10A 250VAC, 16A 125 VAC rating available for select single pole circuits, consult factory for details.
3 Available with incandescent lamps only.
4 Additional colors available. Consult factory for details.

Downloaded from Elcodis.com electronic components distributor