

RGSC-Series




The RGSC-Series Super Corvette rocker switches offer the Corvette styling in a double pole construction with higher electrical ratings and high inrush capabilities. These switches can handle up to 125 amp peak inrush current and can accommodate a wide range of panel cutouts due to the patented mounting ear construction. International ratings are available up to 20 amps.

Specifications

- Certifications*: UL, CSA, VDE
- Dielectric Strength: 1,000V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon

* Due to ongoing technological advances, consult factory for certification specifics.

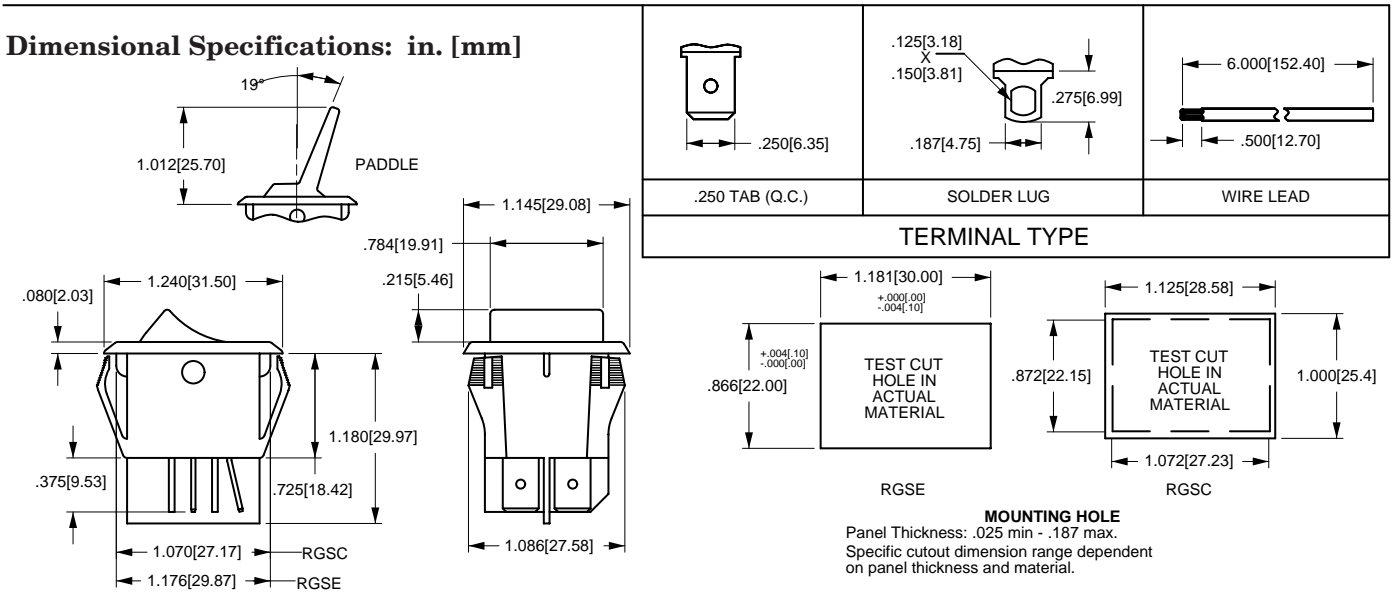

SERIES	CIRCUIT ¹	RATING ²	ACTUATOR STYLE	BASE COLOR ³
RGSC STANDARD BASE	A OFF-NONE-ON SINGLE POLE	20 15A 250VAC 20A 125VAC	P PADDLE	B BLACK
RGSB METAL BRACKET	B ON-NONE-ON SINGLE POLE	21 15A 250 VAC 3/4HP 125-250VAC	R ROCKER	W WHITE
RGSE EUROPEAN BASE	C OFF-NONE-ON DOUBLE POLE	57 10A 250VAC 3/4HP 15A 125VAC 3/4HP 6A 277VAC 3/4HP	ACTUATOR COLOR³	ROCKER FACE IMPRINTED LEGEND⁴
	D ON-NONE-ON DOUBLE POLE	70 15A 250VAC 20A 125VAC 3/4HP 125-250VAC 16(6)A 250VAC T85	B BLACK W WHITE	0 NO LEGEND
	E POLE 1 ON-NONE-ON POLE 2 OFF-NONE-ON	71 15A 250VAC 20A 125VAC 16(6)A 250VAC T85		A OFF-ON (VERTICAL)
	F POLE 1 ON-NONE-OFF POLE 2 OFF-NONE-ON			B OFF-ON (HORIZONTAL)
				D O-I (HORIZONTAL)
				E O-I (VERTICAL)
				F ON-OFF (VERTICAL)
				G ON-OFF (HORIZONTAL)

TERMINATION

0	SOLDER LUG
1	.250TAB (QC)
5	WIRE LEAD

NOTES:

Shading indicates standard configurations.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

1 Circuits E and F available with Rating Codes 20, 21 and 57 only.

2 Additional ratings are available. Consult factory.

3 Custom colors are available. Consult factory.

4 White is standard with dark actuators; black is standard with light actuators.