

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

<b>Rating</b>	<b>21A 14VDC</b>
<b>Contact Resistance</b>	<b>50m ohm Max.</b>
<b>Insulation Resistance</b>	<b>DC 500V 100M ohm Min.</b>
<b>Dielectric Strength</b>	<b>AC 1500V 1 minute</b>
<b>Operation Temp.</b>	<b>- 20° C ~ 85° C</b>
<b>Function</b>	<b>3P SPST ON-OFF (Led)</b>

Mounting Hole			Circuit Diagram
			<p>12V R=680 ohm</p>
Thickness	X	Y	
0.75~5mm 0.03~0.2inch	36.8 <sup>+0.2</sup> 1.45 <sup>+0.008</sup>	15.3 <sup>+0.2</sup> .60 <sup>+0.008</sup>	

Material:


Frame: Black, Nylon# 66

Actuator: Black, Nylon#66+33%GF

Lens: Red, PC

Printed: None

Water proof and dust proof to fit IP-56

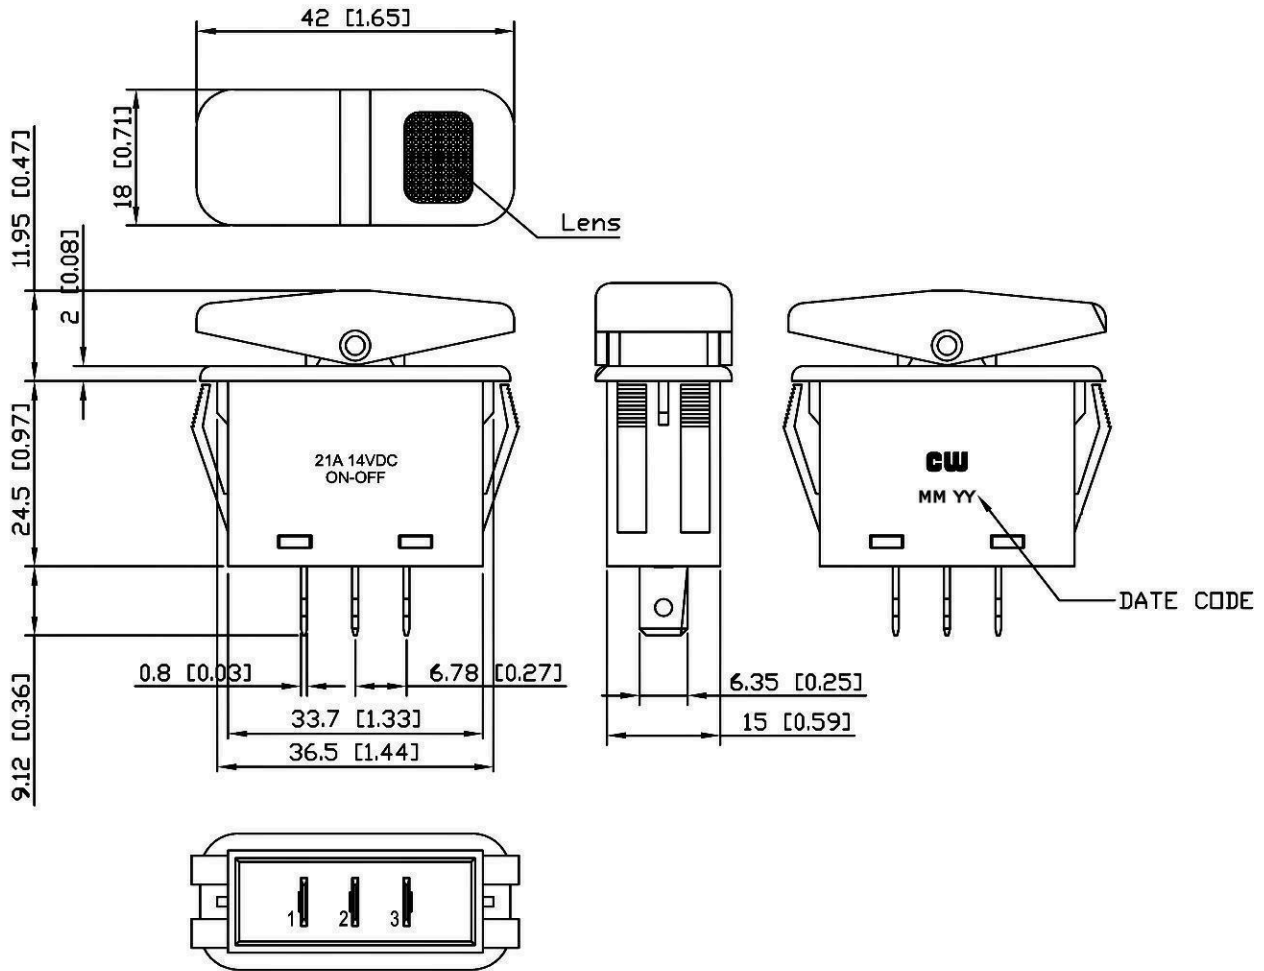

RoHS Compliant

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB258B01BR1**