


RECOMMENDED P.C.B LAYOUT




CIRCUIT: SPDT


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	DPEN	2-1

NOTES:


1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4VA @20VAC or 28VAC or DC
Cu alloy w/GOLD plate over Nickel.
5. FIXED TERMINAL & MOVING CONTACT:
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C
10. 2002/95/EC (ROHS) COMPLIANT

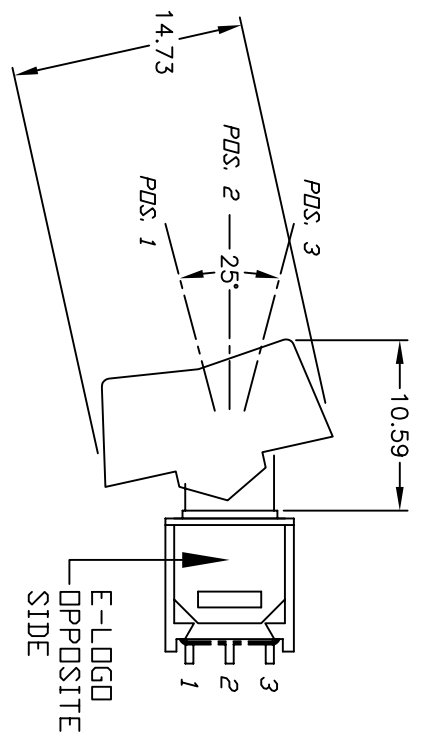

BLACK ACTUATOR

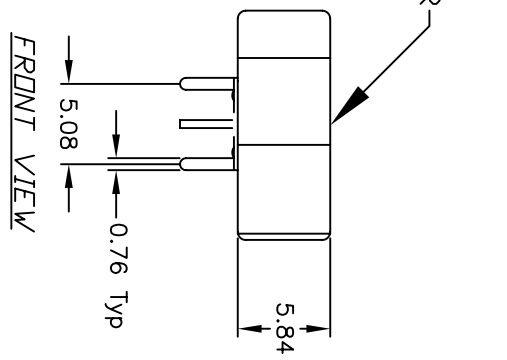

FRONT VIEW

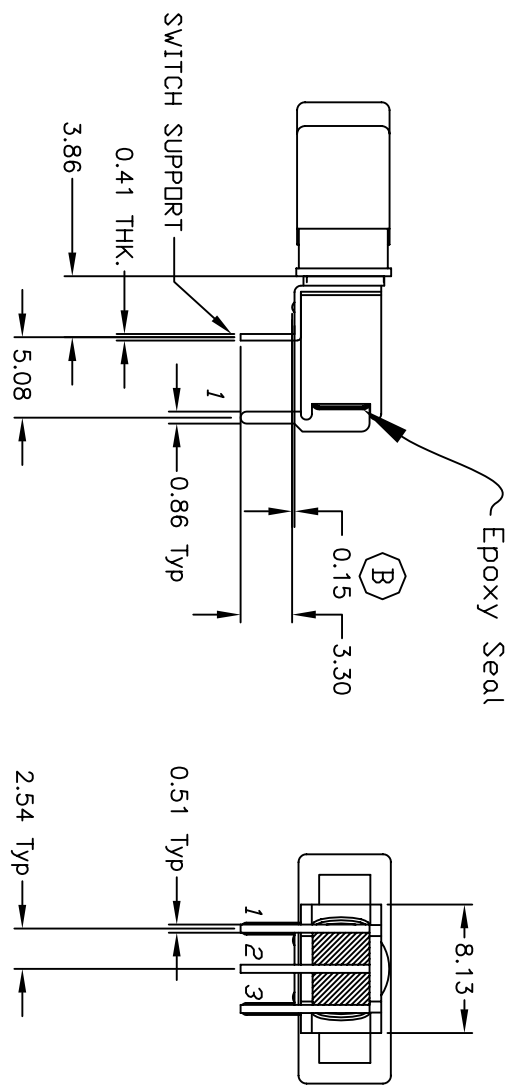

Epoxy Seal

SWITCH SUPPORT

B	17565	CHANGED DIM. .51 TO 0.15	8/16/07	BF
REV.	PCR No.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE	DR	DWG	REV
400MSP1R6BLKMGRE		2:1		8/16/07	BF	T411011	B

