
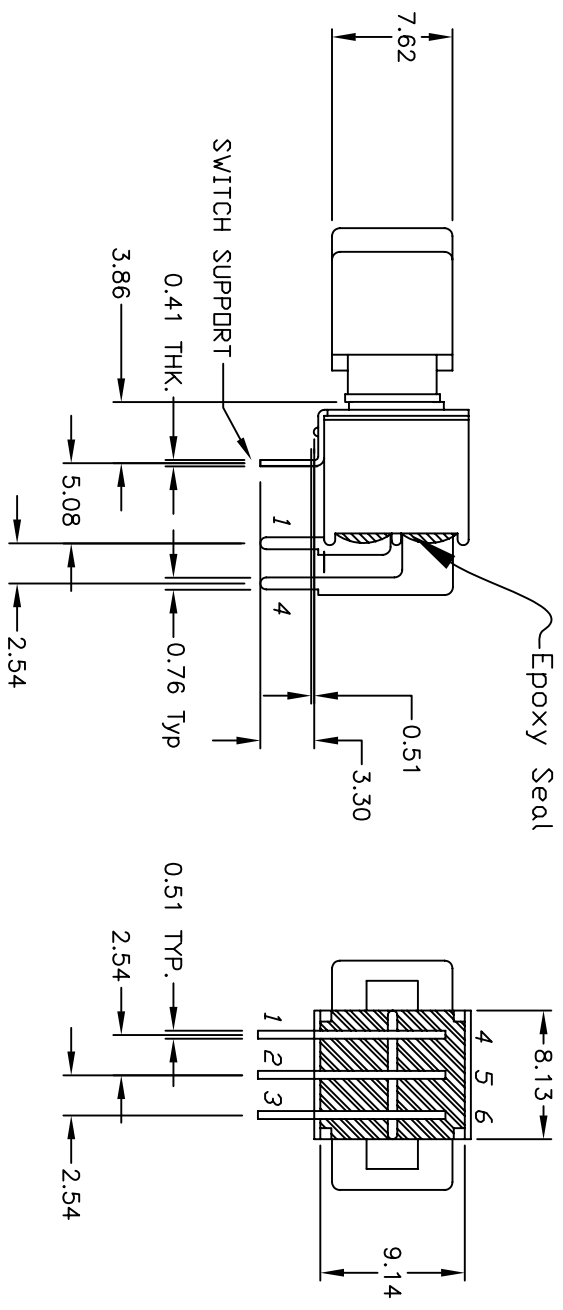
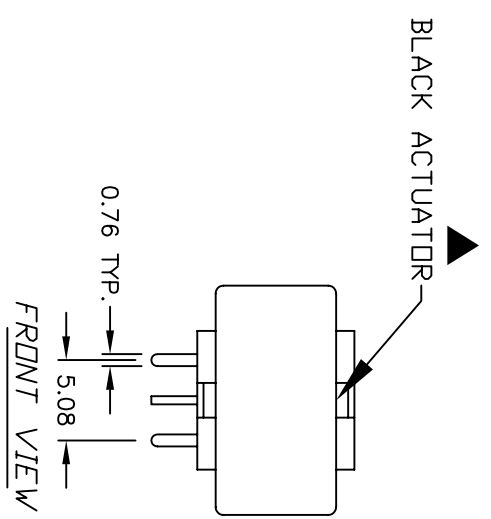


SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
2-3,5-6	DN	2-1,5-4	

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 3A@ 120VAC. OR 28VDC: 1A@ 250VAC.
 5. FIXED TERMINAL & MOVING CONTACT: COPPER ALLOY w/ Silver plate
 6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000 M ohm min.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level.
 9. OPERATING TEMP.: -30°C to +85°C
 10. 2002/95/EC (ROHS) COMPLIANT

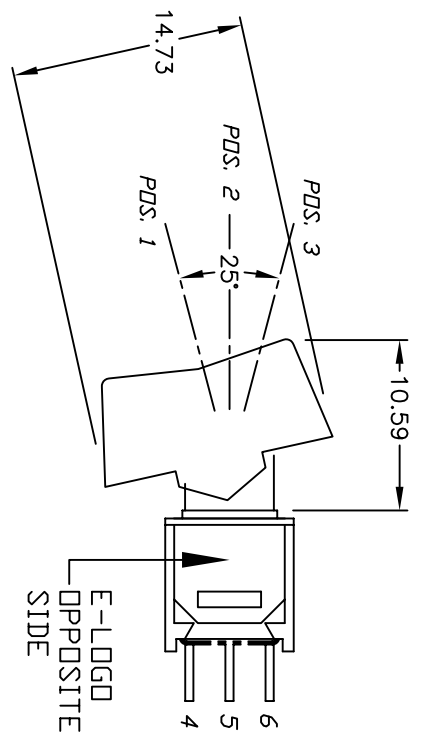

REV.	ECN No.	DESCRIPTION	DATE	CHKD	TN
C	17449	REMOVED MARKING ON ACTUATOR	7/9/07		TN
B	12341	REVISED AND REDRAWN	8/2/02		CJB

TITLE		SCALE		DATE		DR		DWG		REV	
400MDP1R1BLKM6QE		2:1		7/9/07		TN		T421003		C	

