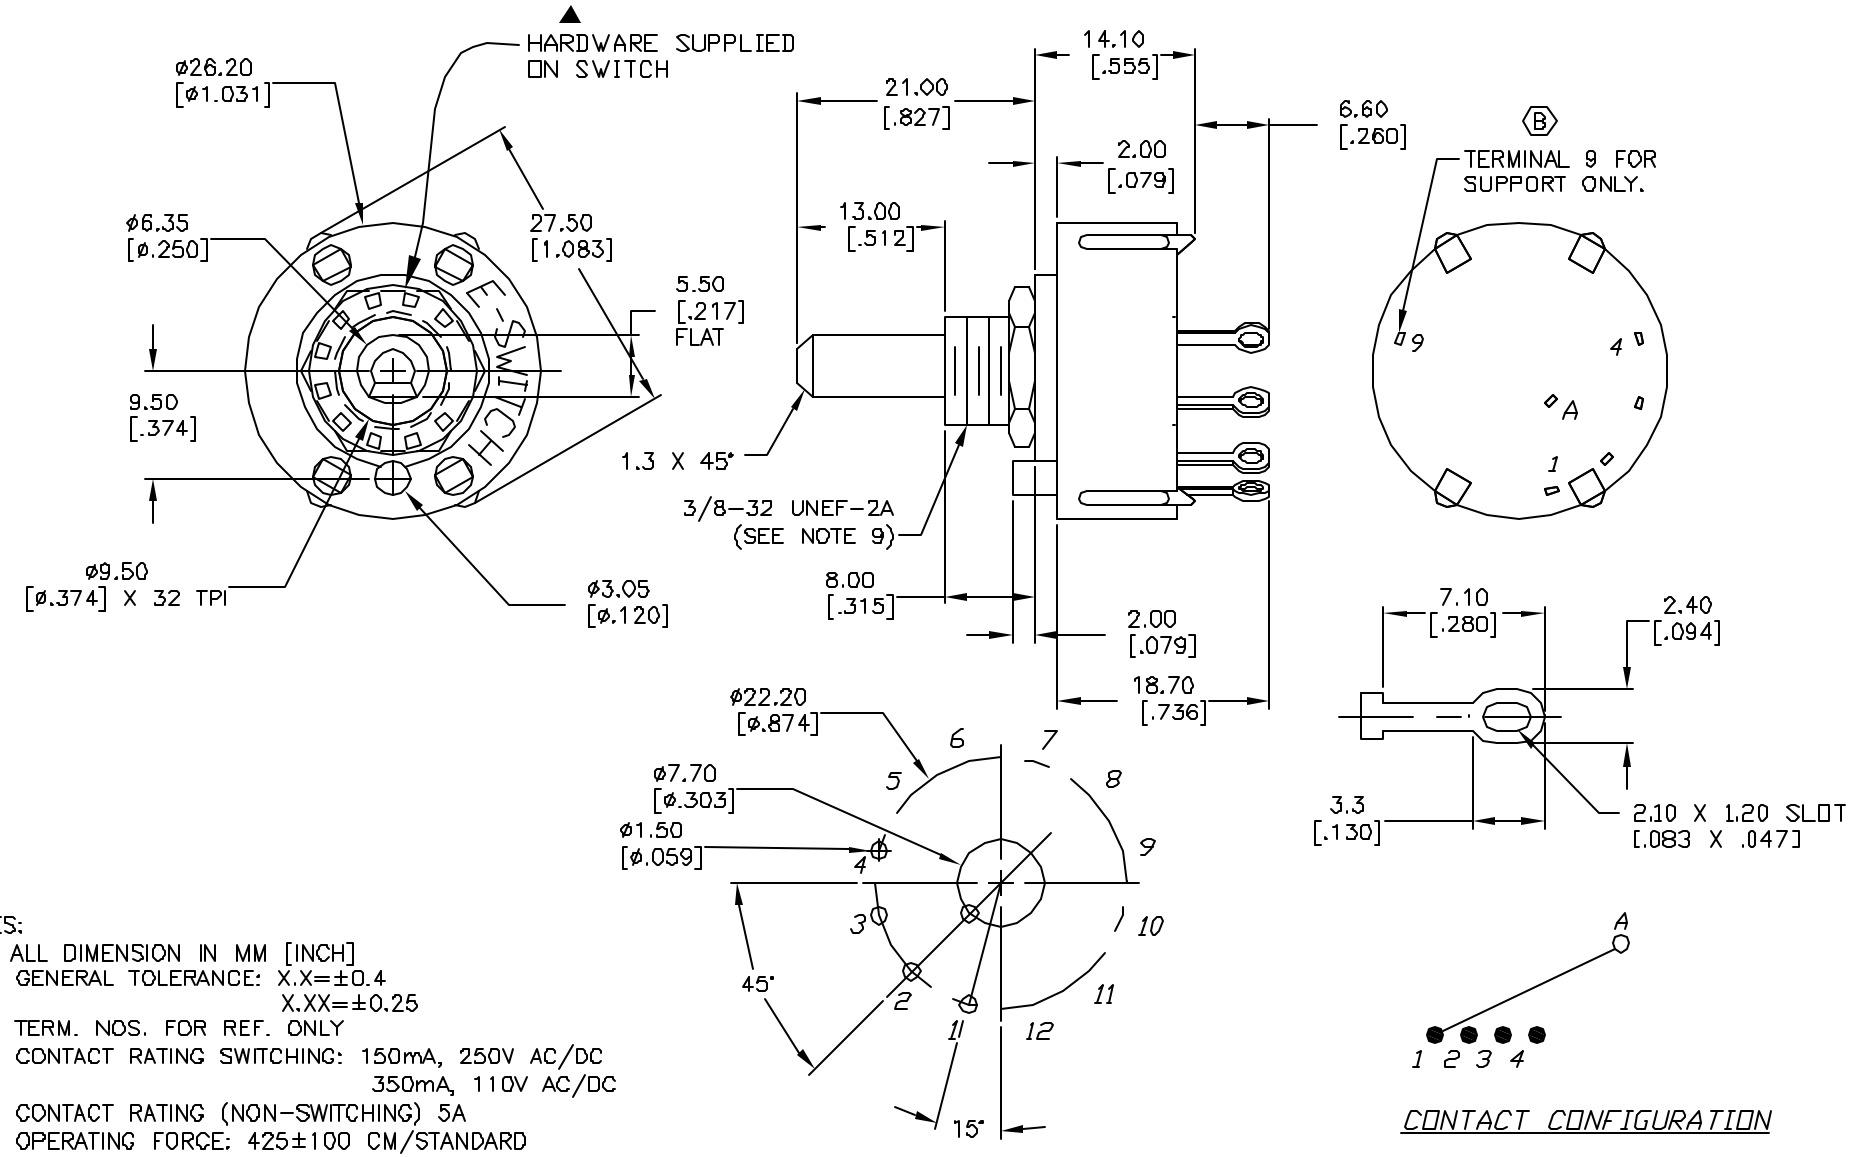

NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
   350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. OPERATING FORCE: 425±100 CM/STANDARD
7. OPERATING TEMP: -30° to 85°C
8. (B) CIRCUIT SP: 4 POSITIONS, 30° INDEX.
9. DIELECTRIC STRENGTH 1000V RMS min.@ SEA LEVEL
10. ▲ DENOTES CRITICAL PARAMETER
11. ▲ HARDWARE SUPPLIED ON SWITCH - SEE BELOW
    STOP RING, LOCKWASHER & HEX NUT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	13286	CORRECT NOTE 8, ADD TERM 9 NOTE	7/14/03	AR
A	13277	RELEASED FOR PRODUCTION	7/10/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE	SCALE	DATE	DR	DWG	REV
KC14A13.001NLS	1.5:1	7/10/03	AR	G510888	B

Downloaded from Elcodis.com electronic components distributor