
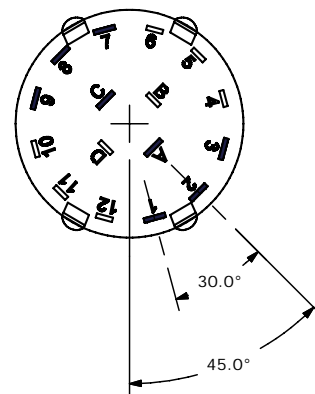



- NOTE:
1. ALL DIMENSIONS IN MM[INCH].
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 - ▲4. CONTACT MATERIAL: GOLD FLASH OVER SILVER
 5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
300MILLIAMP, 125VAC/DC
 6. CONTACT RATING (NON-SWITCHING) 5A
 7. OPERATING FORCE 425±100CM/STANDARD
 8. OPERATING TEMP: -30°C TO 85°C
 9. CIRUIT DP: 3 POSITION 30° INDEX.
 10. DIELECTRIC STRENGTH: 500V RMS MIN.@ SEA LEVEL.
 11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
 12. ▲ DENOTES CRITICAL PARAMETER.

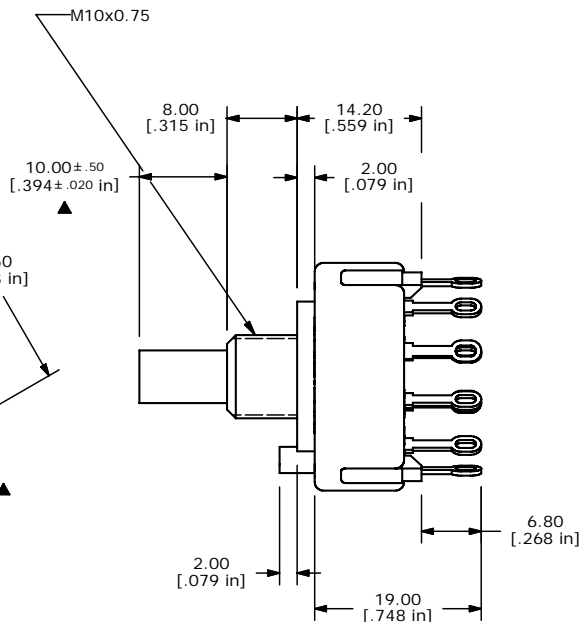

E-SWITCH®

TITLE KC23B10.002NLF

| | | | | |
|-----|--------|-------------|---------|----|
| A | 15089 | NEW RELEASE | 7/22/05 | RC |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| | | | | |
|-------|-----------|----|----------|-----|
| SCALE | DATE | DR | DWG | REV |
| 2=1 | 7/22/2005 | RC | G511005A | A |