

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APP
A2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

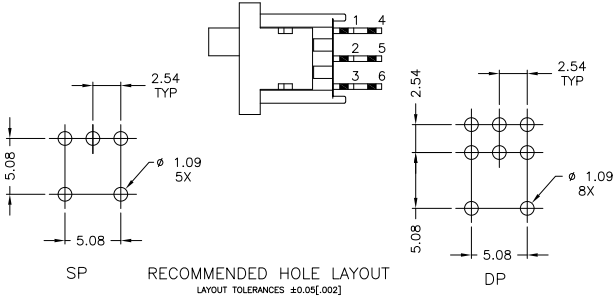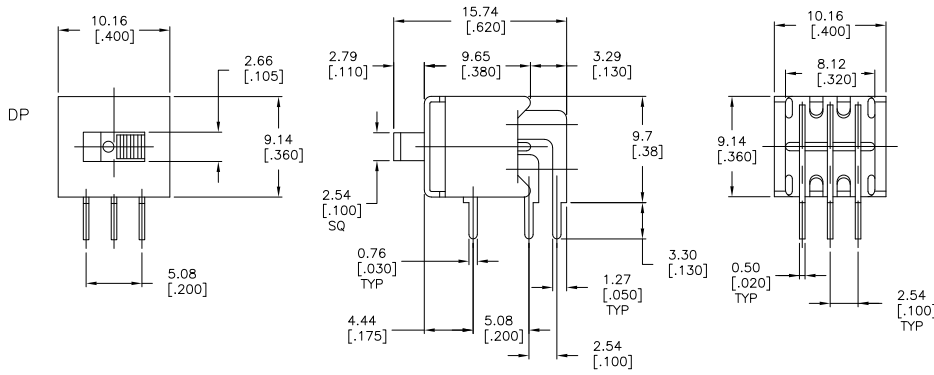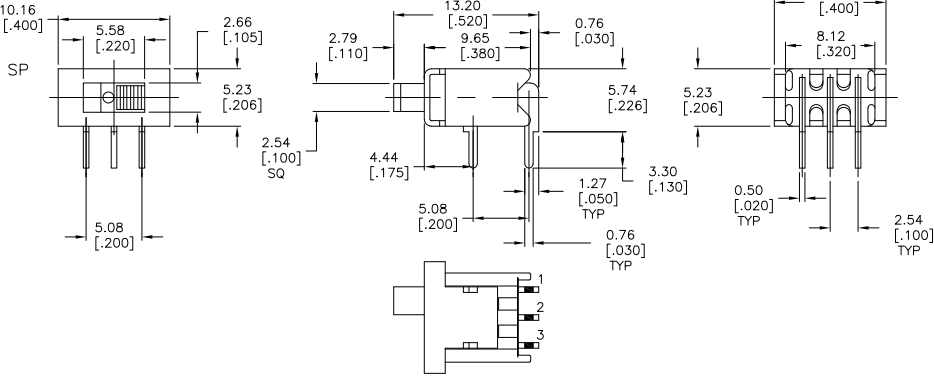

SPECIFICATIONS:

MATERIALS:
CASE-HIGH TEMPERATURE POLYESTER, BLACK
ACTUATOR-POLYESTER, UL94V-0, BLACK
FRAME-STEEL, TIN PLATE
MOVING CONTACT-COPPER ALLOY, GOLD OVER NICKEL PLATE
FIXED CONTACT-COPPER ALLOY, GOLD OVER NICKEL PLATE
TERMINAL-COPPER ALLOY, TIN OVER NICKEL PLATE

ELECTRICAL:
CURRENT RATING: 0.4 VA MAX. 20 V MAX. (AC/DC).
INITIAL CONTACT RESISTANCE: 40 MILLIOHMS MAX.
© 100 M.V. AND 1 M.A. VOLTAGE WITHSTAND: 1000 VAC BETWEEN TERMINALS AND CASE GROUND FOR 1 MINUTE.
LIFE: 60,000 - 80,000 CYCLES.

MECHANICAL:
ACTUATION FORCE: 150-600 GRAMS

ENVIRONMENTAL:
OPERATING TEMPERATURE: -4°F TO + 176°F (-20°C TO +80°C)
STORAGE TEMPERATURE: -4°F TO + 176°F (-20°C TO +80°C)
SOLDER HEAT RESISTANCE PER EIA-364-56A, PROCEDURE 3, COND. B
SOLDERABILITY PER EID 364-52, CLASS 2 CATEGORY 1

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

P/N	Alco P/N	Actuator Flush/Extended	Position	Type			
1571984-1	TSS11DGRA04	Extended	2	SPDT	1,2	None	2,3
1571984-2	TSS11EGRA04	Extended	3	SPDT	1,2	Off	2,3
1571984-3	TSS21INGRA04	Extended	2	DPDT	1-2, 4-5	None	2-3, 5-6
1571984-4	TSS21PGRA04	Extended	3	DPDT	1-2, 4-5	Off	2-3, 5-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 28FEB04		TE Connectivity
DIMENSIONS: mm [INCHES]		DESIGNER: M. BINNER		SLIDE SWITCH
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK: M. SARVER	RA	
0 PLG ± .010		APP: M. SARVER	-	
1 PLG ± .010		PRODUCT SPEC: -	-	
2 PLG ± .010		APPLICATION SPEC: -	-	
3 PLG ± .010		WEIGHT: -	SIZE: A2	CAGE CODE: 00779
4 PLG ± .010		MATERIAL: -	DRAWING NO: 1571984	
ANGLES ± .010		FINISH: -	RESTRICTED TO: -	
SEE SPECIFICATION		CUSTOMER DRAWING	SCALE: 4:1 SHEET: 1 of 1 REV: A2	