

# SERIES EG1390 SWITCHES



E-SWITCH™

## SLIDE SWITCHES



### FEATURES & BENEFITS

Tape & Reel Packaging  
2-position  
Surface Mount  
Sub-miniature

### APPLICATIONS / MARKETS

Computer Servers/peripherals  
Consumer electronics  
Instrumentation  
Test & measurement

### MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf in both directions
Travel:	1.5 +/- 0.1mm each position

### ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +70°C

### HOW TO ORDER:

SERIES






EG

MODEL

1390

ACTUATOR

A = 1.0mm  
B = 2.0mm

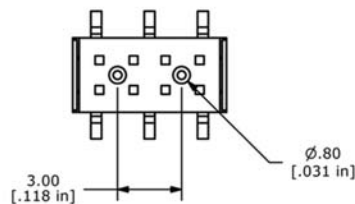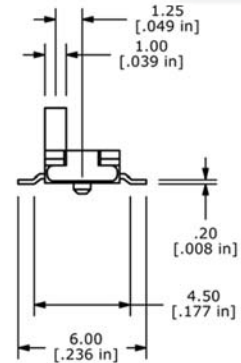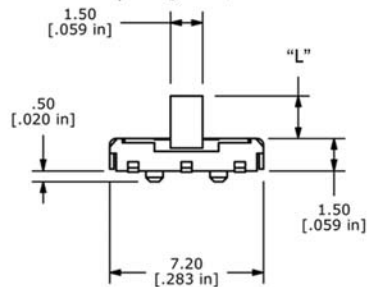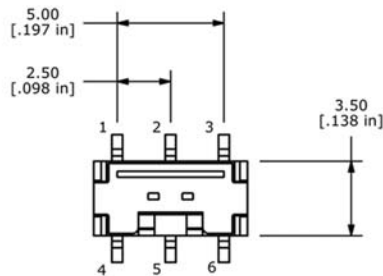

Model	"L" Dimension
1390 A	1.00 mm
1390 B	2.00 mm

