


### Single IGBTMOD™ H-Series Module 800 Amperes/1400 Volts

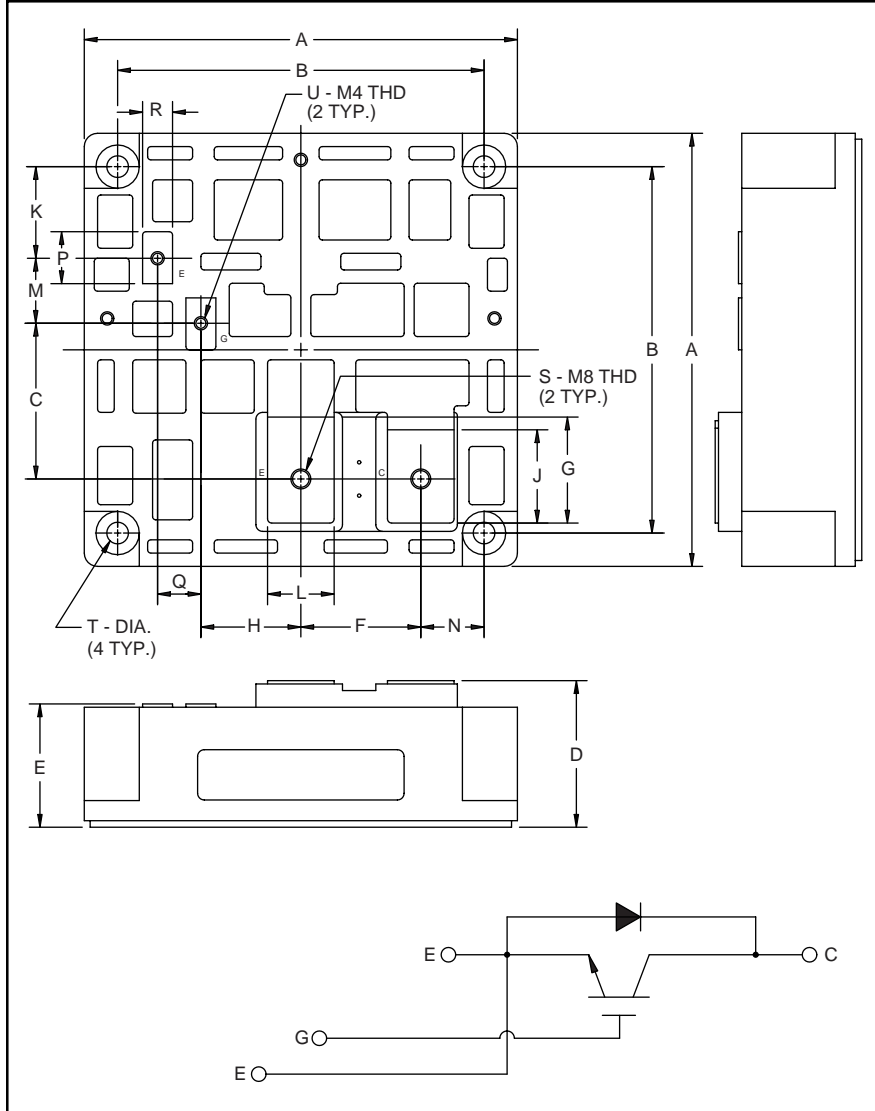

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.12	130.0
B	4.33±0.01	110.0±0.25
C	1.840	46.75
D	1.73±0.04/0.02	44.0±1.0/0.5
E	1.46±0.04/0.02	37.0±1.0/0.5
F	1.42	36.0
G	1.25	31.8
H	1.18	30.0
J	1.10	28.0
K	1.08	27.5

Dimensions	Inches	Millimeters
L	0.79	20.0
M	0.77	19.5
N	0.75	19.0
P	0.61	15.6
Q	0.51	13.0
R	0.35	9.0
S	M8 Metric	M8
T	0.26 Dia.	Dia. 6.5
U	M4 Metric	M4



#### Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of one IGBT Transistor in a single configuration with a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

#### Features:

- Low Drive Power
- Low  $V_{CE(sat)}$
- Discrete Super-Fast Recovery (135ns) Free-Wheel Diode
- High Frequency Operation (20-25kHz)
- Isolated Baseplate for Easy Heat Sinking

#### Applications:

- AC Motor Control
- Motion/Servo Control
- UPS
- Welding Power Supplies
- Laser Power Supplies

#### Ordering Information:

Example: Select the complete part module number you desire from the table below -i.e. CM800HA-28H is a 1400V ( $V_{CES}$ ), 800 Ampere Single IGBTMOD™ Power Module.

Type	Current Rating Amperes	$V_{CES}$ Volts (x 50)
CM	800	28

**CM800HA-28H**  
**Single IGBTMOD™ H-Series Module**  
 800 Amperes/1400 Volts

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	CM800HA-28H	Units
Junction Temperature	$T_j$	-40 to +150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$
Collector-Emitter Voltage (G-E SHORT)	$V_{CES}$	1400	Volts
Gate-Emitter Voltage	$V_{GES}$	$\pm 20$	Volts
Collector Current	$I_C$	800	Amperes
Peak Collector Current	$I_{CM}$	1600*	Amperes
Diode Forward Current	$I_F$	800	Amperes
Diode Forward Surge Current	$I_{FM}$	1600*	Amperes
Power Dissipation	$P_d$	4800	Watts
Max. Mounting Torque M8 Terminal Screws	-	95	in-lb
Max. Mounting Torque M6 Mounting Screws	-	26	in-lb
Max. Mounting Torque M4 G-E Terminal Screws	-	13	in-lb
Module Weight (Typical)	-	1600	Grams
V Isolation	$V_{RMS}$	2500	Volts

\* Pulse width and repetition rate should be such that device junction temperature does not exceed the device rating.

**Static Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_{GE} = 0V$	-	-	5.0	mA
Gate Leakage Current	$I_{GES}$	$V_{GE} = V_{GES}, V_{CE} = 0V$	-	-	0.5	$\mu\text{A}$
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$I_C = 80\text{mA}, V_{CE} = 10V$	4.5	6.0	7.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 800A, V_{GE} = 15V$	-	2.7	3.6	Volts
		$I_C = 800A, V_{GE} = 15V, T_j = 150^\circ\text{C}$	-	2.4	-	Volts
Total Gate Charge	$Q_G$	$V_{CC} = 600V, I_C = 800A, V_{GS} = 15V$	-	4590	-	nC
Diode Forward Voltage	$V_{FM}$	$I_E = 800A, V_{GS} = 0V$	-	-	3.5	Volts

\* Pulse width and repetition rate should be such that device junction temperature rise is negligible.










**Dynamic Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Input Capacitance	$C_{ies}$		-	-	172	nF	
Output Capacitance	$C_{oes}$	$V_{GE} = 0V, V_{CE} = 10V, f = 1\text{MHz}$	-	-	60	nF	
Reverse Transfer Capacitance	$C_{res}$		-	-	35	nF	
Resistive	Turn-on Delay Time	$t_{d(on)}$	-	-	500	ns	
	Load	Rise Time	$t_r$	$V_{CC} = 600V, I_C = 800A,$	-	-	1200
Switching	Turn-off Delay Time	$t_{d(off)}$	$V_{GE1} = V_{GE2} = 15V, R_G = 3.3\Omega$	-	-	1000	ns
	Times	Fall Time	$t_f$	-	-	350	ns
Diode Reverse Recovery Time	$t_{rr}$	$I_E = 800A, di_E/dt = -1600A/\mu\text{s}$	-	-	250	ns	
Diode Reverse Recovery Charge	$Q_{rr}$	$I_E = 800A, di_E/dt = -1600A/\mu\text{s}$	-	6.3	-	$\mu\text{C}$	

**Thermal and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per IGBT	-	-	0.026	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per FWDi	-	-	0.058	$^\circ\text{C/W}$
Contact Thermal Resistance	$R_{th(c-f)}$	Per Module, Thermal Grease Applied	-	-	0.018	$^\circ\text{C/W}$

**CM800HA-28H**  
**Single IGBTMOD™ H-Series Module**  
 800 Amperes/1400 Volts

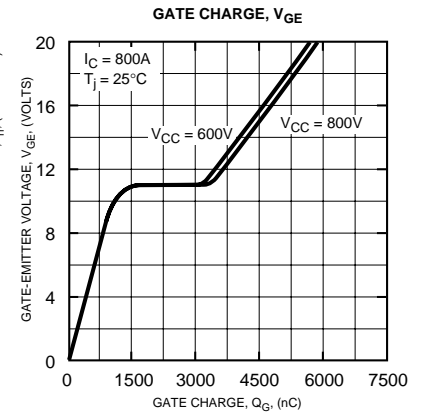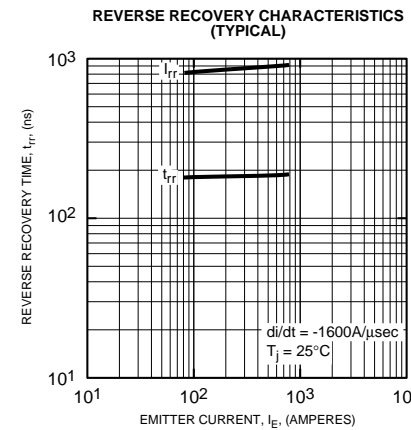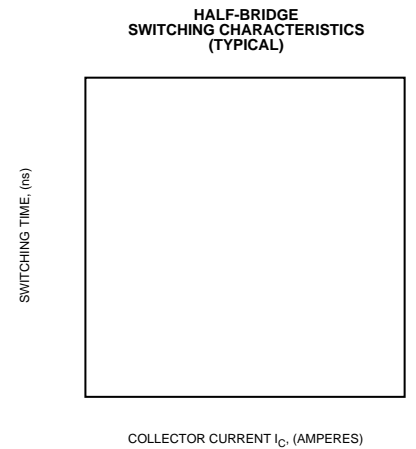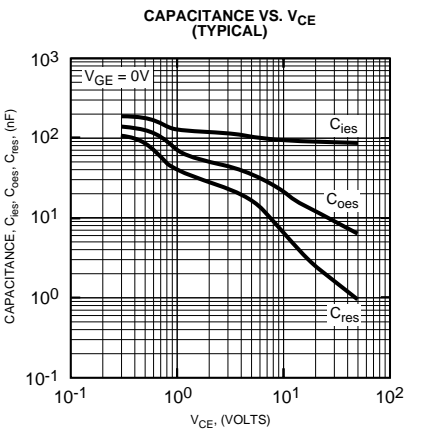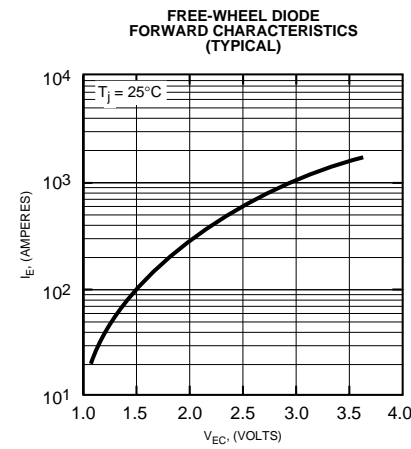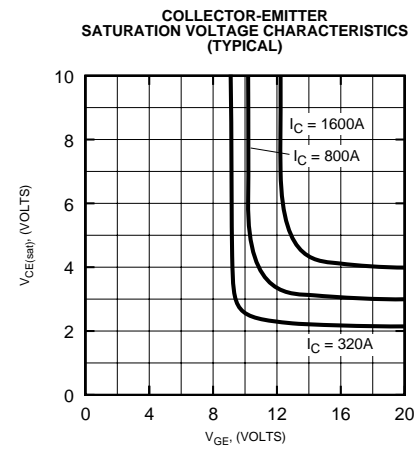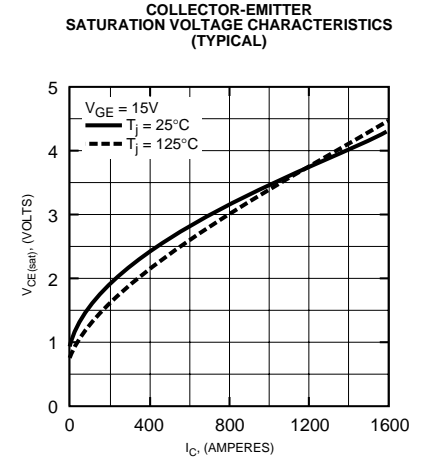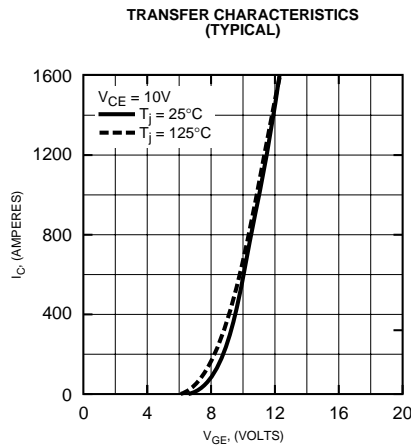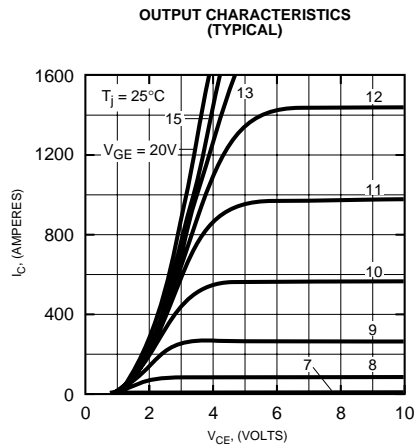

**CM800HA-28H**  
**Single IGBTMOD™ H-Series Module**  
 800 Amperes/1400 Volts

