

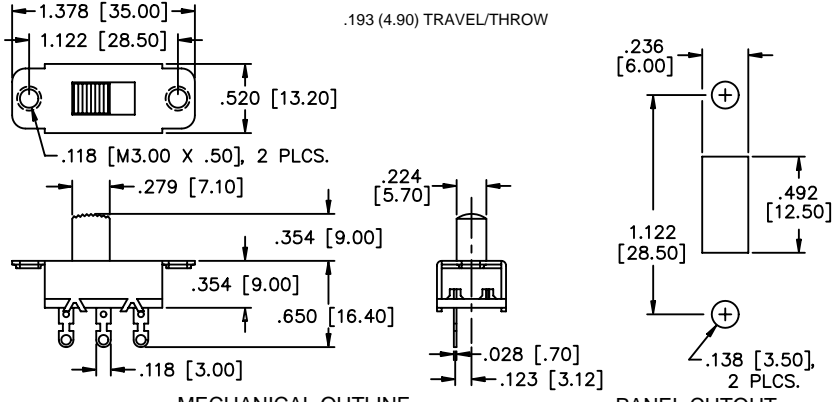


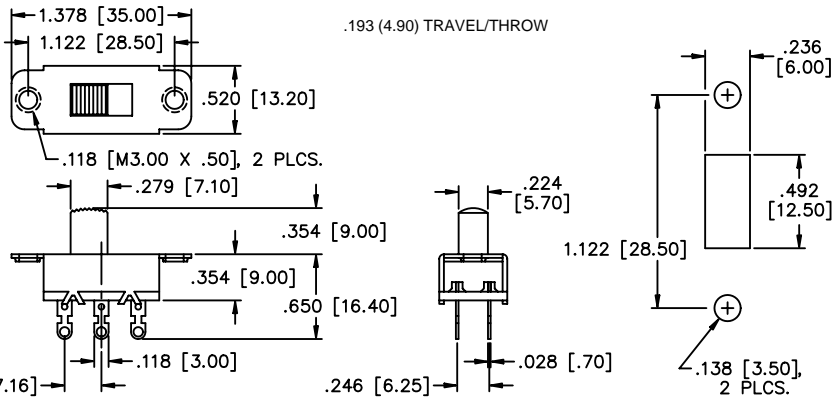


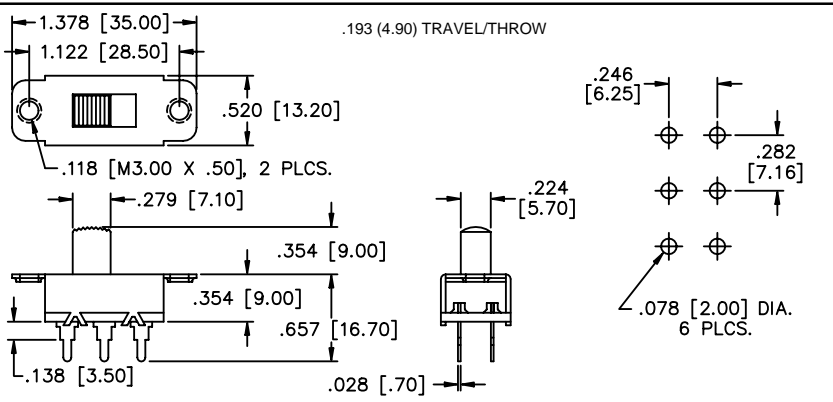


PM Series

Standard Size Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
<p>Contact rating: 6 Amps at 125 VAC, 3 Amps at 250 VAC</p> <p>Initial contact resistance: 30 milliohms max.</p> <p>Insulation resistance: 100 megohms min. at 500 VDC</p> <p>Dielectric strength: 1000 VAC for 1 minute (min.)</p> <p>Electrical life: 10,000 cycles min.</p> <p>Operating temperature range: -20°C to +60°C</p> <p>Actuation force: 500g ± 200g</p> <p>Solder heat resistance: 260°C max. for 3 seconds</p> <p>Solvent washing permissible</p>	<ul style="list-style-type: none"> Wash-through open frame construction. UL & CSA recognized. Threaded mounting holes standard - M3X0.5. Panel mounting.
MATERIALS	
<p>Contacts: Silver plated phosphor bronze</p> <p>Terminals: Tin plated brass</p> <p>Base: Phenolic laminated sheet</p>	<p>Actuator: Nylon, type 6/6</p> <p>Frame: Zinc plated steel</p>

<p>MODEL NO.</p> <p>PM13B012</p> 	<p>1P2T</p>  <p>● = COMMON</p>	<p style="text-align: right;">.193 (4.90) TRAVEL/THROW</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p> <p style="text-align: right;">PANEL CUTOUT</p>
<p>MODEL NO.</p> <p>PM13B022</p> 	<p>2P2T</p>  <p>● = COMMON</p>	<p style="text-align: right;">.193 (4.90) TRAVEL/THROW</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p> <p style="text-align: right;">P. C. BOARD LAYOUT</p>
<p>MODEL NO.</p> <p>PM13B022P</p> 	<p>2P2T</p>  <p>● = COMMON</p>	<p style="text-align: right;">.193 (4.90) TRAVEL/THROW</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p> <p style="text-align: right;">PANEL CUTOUT</p>