



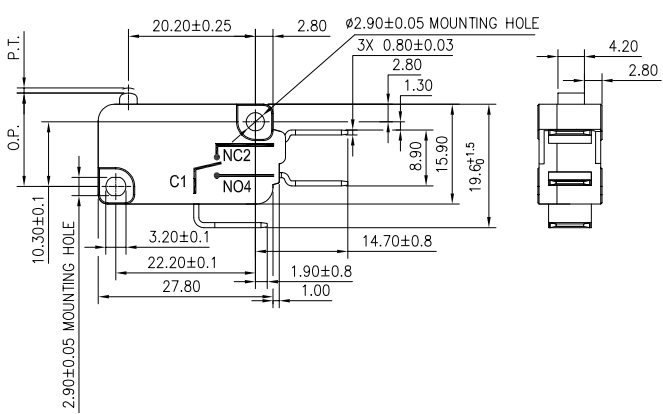


FO-50360-L

HONEYWELL PART NUMBER
V15T16-CZ100-K
PRODUCT CODE CWF2002

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

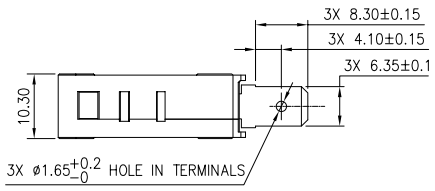

NOTES:
1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS OPERATING FORCE: 100gf MAX. DIFFERENTIAL FORCE: _____ RELEASE FORCE: 25gf MIN. FREE POSITION: _____ OPERATING POSITION: 14.7±0.5MM. PRE-TRAVEL: 1.6MM MAX. DIFFERENTIAL TRAVEL: 0.4MM MAX. OVER-TRAVEL: 0.8MM MIN. FULL OVERTRAVEL FORCE: _____	ELECTRICAL DATA CONTACT ARRANGEMENT S.P.D.T  16(4)A 250V~ 25T125 µ 5E4  16A 1/2HP 125/250VAC	DESIGN UNITS: MM TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± - TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± - ANGLES X ± 2° THIRD ANGLE PROJECTION 	DRAWN KSR 03DEC07 CHECK RJ 03DEC07	Honeywell TITLE SWITCH - BASIC THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE B TYPE I SCALE —	CAGE CODE DRAWING NAME V15T16-CZ100-K SHEET 1 OF 1	REV B
			AutoCAD		DRAWING NAME V15T16-CZ100-K SHEET 1 OF 1		