


|                          |
|--------------------------|
| FO-50360-L               |
| HONEYWELL<br>PART NUMBER |
| V15T16-CZ300A03-K        |
| PRODUCT CODE             |
| CFW2057                  |

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| A   | 0038670  | VS 10APRO8 | BLR   |

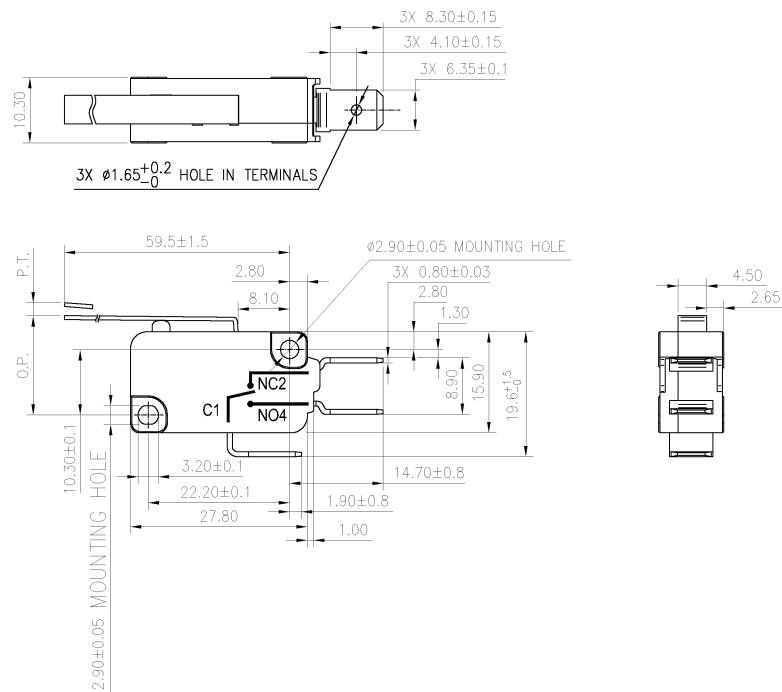

NOTES:  
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

|  |  |   |   |   |
|--|--|---|---|---|
| <b>CHARACTERISTICS</b><br>OPERATING FORCE: 90gf MAX.<br>DIFFERENTIAL FORCE:<br>RELEASE FORCE: 15gf MIN.<br>FREE POSITION:<br>OPERATING POSITION: 15.3±3MM.<br>PRE-TRAVEL: 6.4MM MAX.<br>DIFFERENTIAL TRAVEL: 2.4MM MAX.<br>OVER-TRAVEL: 2.6MM MIN.<br>FULL OVERTRAVEL FORCE: | <b>ELECTRICAL DATA</b><br>CONTACT ARRANGEMENT<br>S.P.D.T<br>16(4)A 250V~<br>25T125 µ 5E4<br>16A 1/2HP 125/250VAC | <b>DESIGN UNITS: MM</b><br><b>TOLERANCES UNLESS NOTED:</b><br>NO PLACE X ± ±<br>ONE PLACE .X ± ±<br>TWO PLACE .XX ± ±0.40<br>THREE PLACE .XXX ± ±<br>ANGLES X ± ±2°<br>THIRD ANGLE PROJECTION<br> | DRAWN KSR 01APRO8<br>CHECK RJ 01APRO8   | <b>Honeywell</b><br>TITLE<br>SWITCH - BASIC |
|  |  |   | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.<br>INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY<br>AutoCAD |   |