



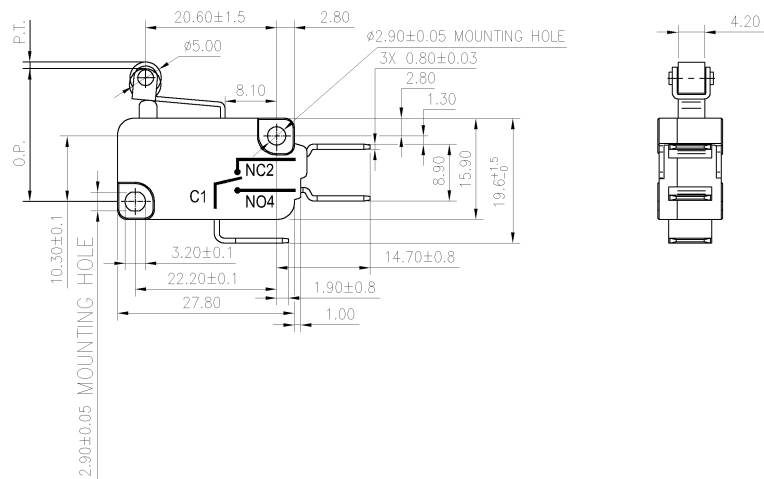



FO-50360-L	4
HONEYWELL PART NUMBER	
V15T16-CZ100A05-K	
PRODUCT CODE	
CFW2044	

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

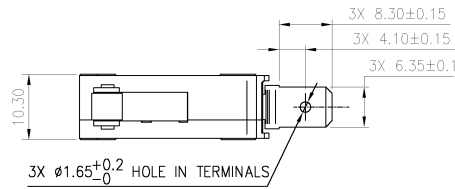

NOTES:

- TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS OPERATING FORCE: 120gf MAX. DIFFERENTIAL FORCE: RELEASE FORCE: 20gf MIN. FREE POSITION: OPERATING POSITION: 20.6±0.8MM. PRE-TRAVEL: 1.6MM MAX. DIFFERENTIAL TRAVEL: 0.4MM MAX. OVER-TRAVEL: 0.8MM MIN. FULL OVERTRAVEL FORCE:	ELECTRICAL DATA CONTACT ARRANGEMENT S.P.D.T  16(4)A 250V~  25T125 µ 5E4  16A 1/2HP 125/250VAC	DESIGN UNITS: MM TOLERANCES UNLESS NOTED: NO PLACE X ± ± ONE PLACE .X ± ± TWO PLACE .XX ± ± 0.40 THREE PLACE .XXX ± ± ANGLES X ± ± 2° THIRD ANGLE PROJECTION 	DRAWN KSR 01APR08 CHECK RJ 01APR08	Honeywell THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	TITLE SWITCH - BASIC		SIZE B I TYPE I CAGE CODE DRAWING NAME V15T16-CZ100A05-K REV A
			AutoCAD		SCALE NTS SHEET 1 OF 1		

4

3

4

2

1