





FO-50360-L
HONEYWELL PART NUMBER
V15H16-CZ100A03-K
PRODUCT CODE CWF2020

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

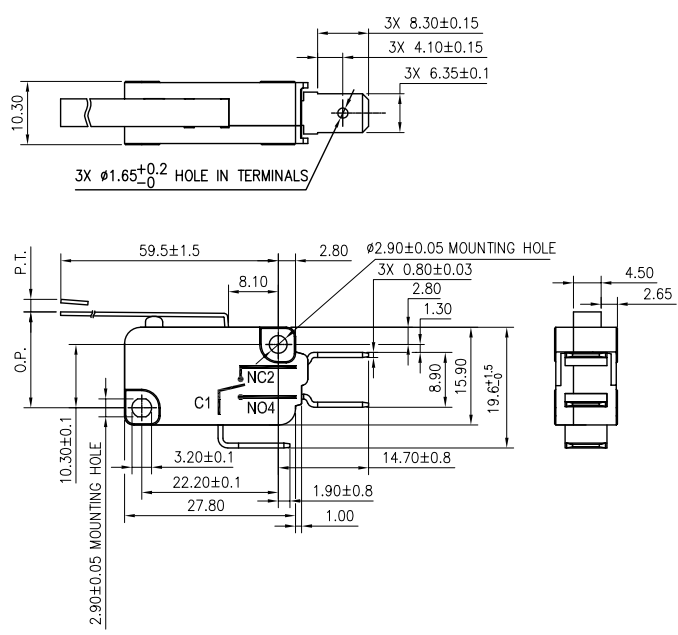

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS OPERATING FORCE: 30gf MAX. DIFFERENTIAL FORCE: _____ RELEASE FORCE: 5gf MIN. FREE POSITION: _____ OPERATING POSITION: 15.3±3MM. PRE-TRAVEL: 6.4MM MAX. DIFFERENTIAL TRAVEL: 2.4MM MAX. OVER-TRAVEL: 2.6MM MIN. FULL OVERTRAVEL FORCE: _____	ELECTRICAL DATA CONTACT ARRANGEMENT S.P.D.T  16(4)A 250V- 25T150 µ 5E4  16A 1/2HP 125/250VAC	DESIGN UNITS: MM TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± - TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± - ANGLES X ± 2° THIRD ANGLE PROJECTION 	DRAWN KSR 03DEC07 CHECK RJ 03DEC07	Honeywell TITLE SWITCH - BASIC THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE B TYPE I CAGE CODE DRAWING NAME V15H16-CZ100A03-K REV B
			AutoCAD SCALE - SHEET 1 OF 1		