

CATALOG LISTING

V7-3E17D8

REPLACES X94131-V7

RELEASE NO. PR-18798

ISSUE

4

CHECK

REVISIONS

A	PR-18798	WLS	6 NOV 90
B	CO 69746	WJC	15 MAR 91
C	CO 76104	GRT	4 OCT 93

CHECK


DAW 10 NOV 90

CHECK

WLS 6 NOV 90


DDM/CAD

DRAWN

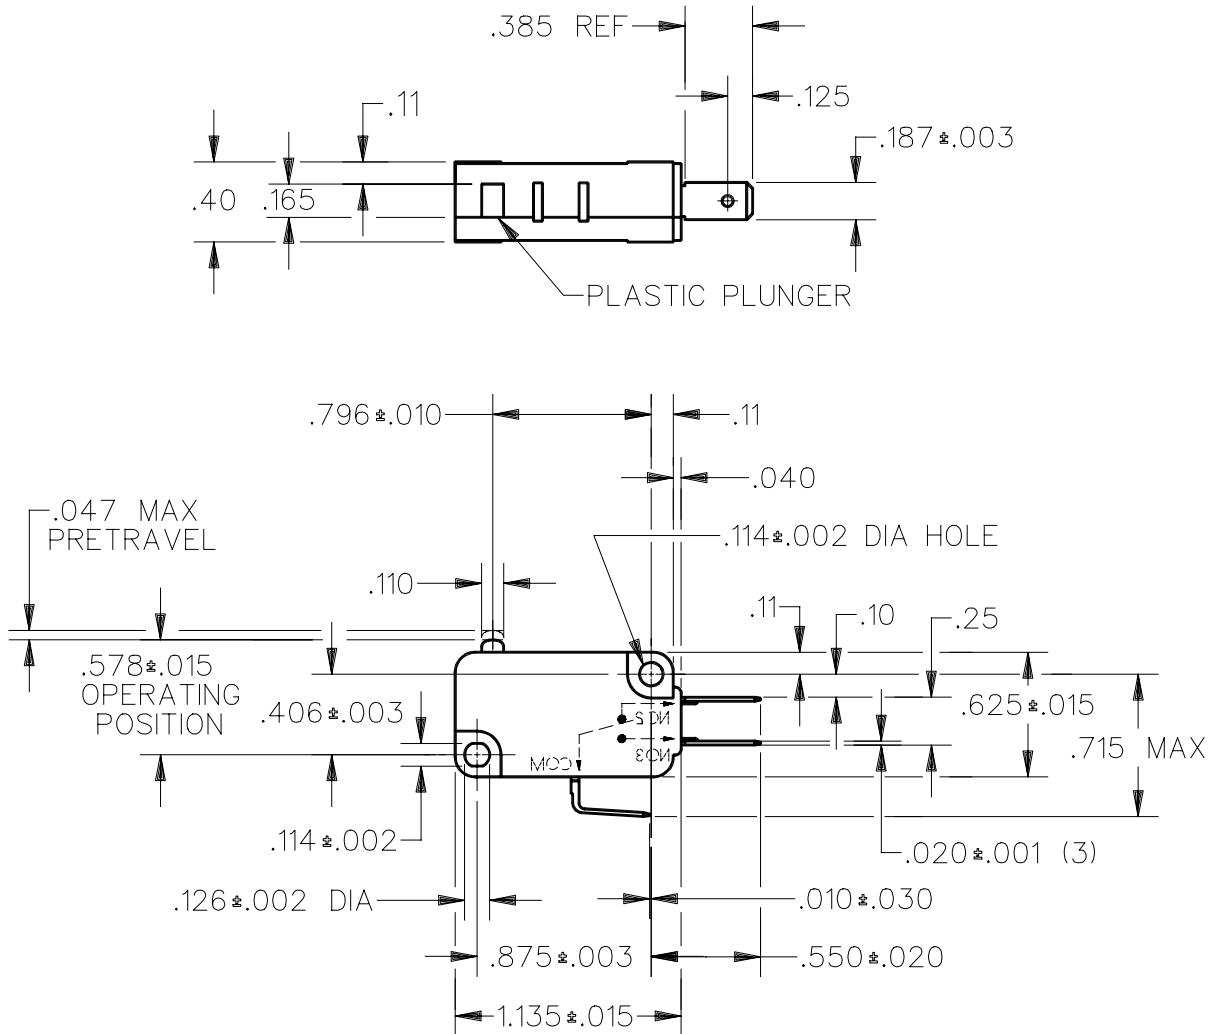

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 50 GRAMS MAX
RELEASE FORCE --- 5 GRAMS MIN
DIFFERENTIAL TRAVEL --- .002-.010
OVERTRAVEL --- .050 MIN
FREE POSITION --- .625 MAX
RELEASE TRAVEL --- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L216 10A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 4A 125 VAC "L"

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE (.0)	±.030	
TWO PLACE (.00)	±.015	
THREE PLACE (.000)	±.005	
ANGLES	±	



WEIGHT