


**CW-B5615**

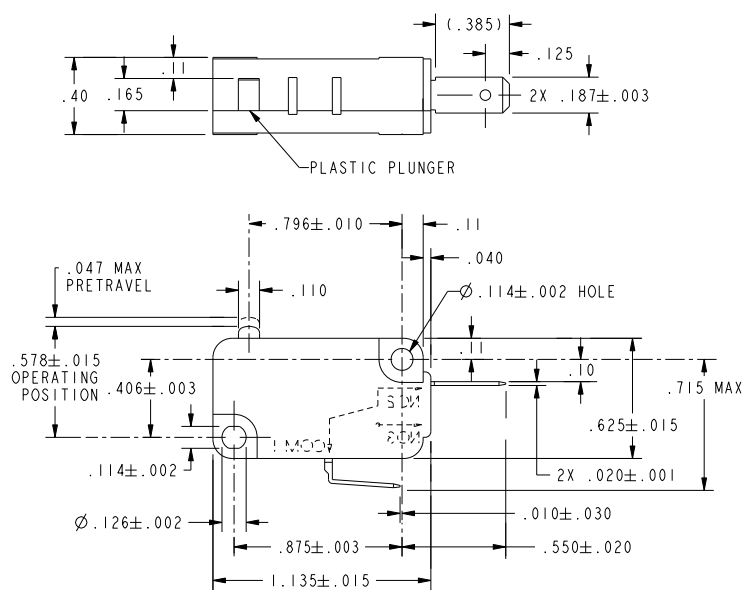

<b>CHARACTERISTICS</b> OPERATING FORCE ----150 GRAMS MAX RELEASE FORCE ----- 25 GRAMS MIN DIFFERENTIAL TRAVEL ---- .002-.010 OVERTRAVEL ----- .050 MIN FREE POSITION----- .625 MAX RELEASE TRAVEL----- .010 MIN		<b>ELECTRICAL DATA</b> CONTACT ARRANGEMENT S P N C  L215 15.1A 1/2HP 125, 250 OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC *L*		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: <input checked="" type="checkbox"/> US (INCH) CUSTOMARY <input type="checkbox"/> SI (MM) METRIC NO PLACE X $\pm .040$ $\pm 1$ ONE PLACE .X $\pm .030$ $\pm 0,4$ TWO PLACE .XX $\pm .015$ $\pm 0,15$ THREE PLACE .XXX $\pm .005$ $\pm$ ANGLES $\pm$ $\pm$ RAW MATERIAL-COMMERCIAL STANDARD		DRAWN TSM IAPRO3 CHECK SAV IAPRO3	<b>Honeywell</b> TITLE <b>SWITCH, BASIC</b>	
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		THIRD ANGLE PROJECTION		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		SIZE DWG TYPE DRAWING NAME REV <b>B</b> <b>I</b> <b>V7-1C37D8</b> <b>5</b>		
PTC 2D		ASME Y14.5M-1994		SCALE 2:1		WEIGHT SHEET 1 OF 1		