

CATALOG LISTING  
V7-5F17D8

REPLACES  
RELEASE NO. PR-19544

ISSUE  
**M**

3

CHECK



CHECK

CHECK

CHECK

CHECK


CHECK

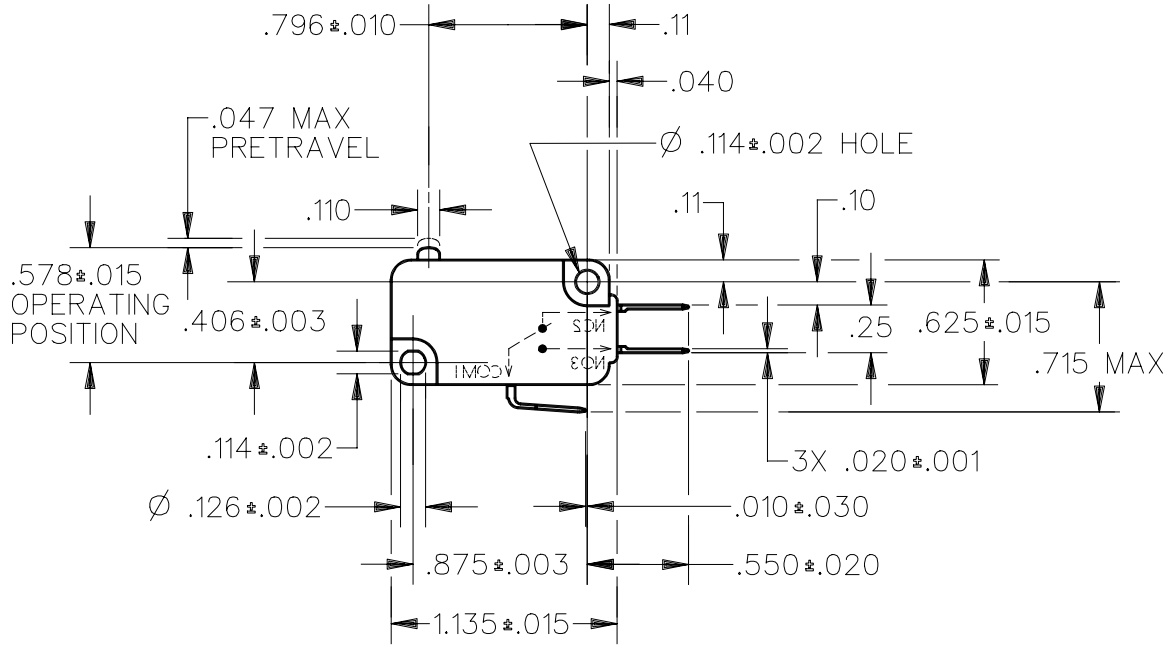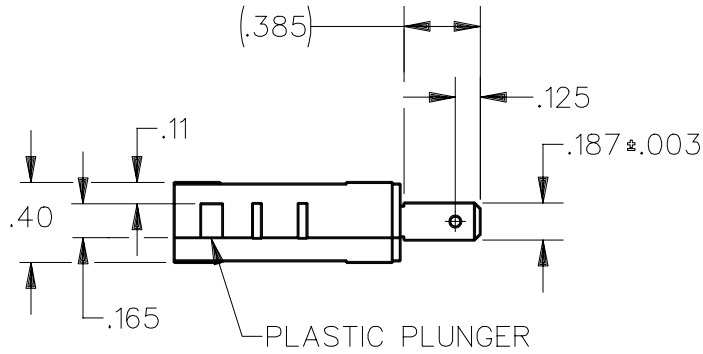

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 15 GRAMS MAX  
RELEASE TRAVEL — — — — .010 MIN  
DIFFERENTIAL TRAVEL — — — .002-.010  
OVERTRAVEL — — — — .050 MIN  
FREE POSITION — — — — .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T

L163 3A 125, 250, 277 VAC  
1/10HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.015  
THREE PLACE (.000) ±.005  
ANGLES ±

WEIGHT

DDM/CAD

DRAWN

6 SEP 91

6 SEP 91

6 SEP 91