

Honeywell

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-6C17D8-057

CW-C6021

CATALOG LISTING
V7-6C17D8-057

M
 ISSUE 7

CHECK
 11JUL08

REVISIONS
A PR 16980
 16 DEC 88
 WJM

B CO65788
 7 AUG 89
 J A S

C CO66350
 20 SEP 89
 JAP

D CO 76418
 9 DEC 93
 DCS

E CO 0019335
 22 FEB 06
 SV



F 0041190
 11JUL08
 PK

CHECK
 8 DEC 88

JAP

RASTER
 DRAWN

REPLACES
 RELEASE NO. PR-16980

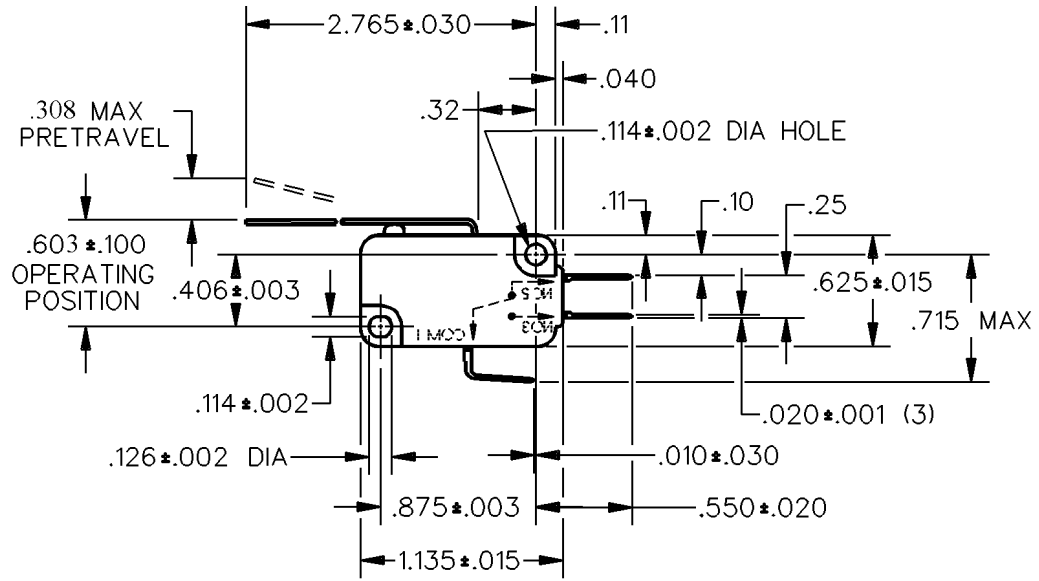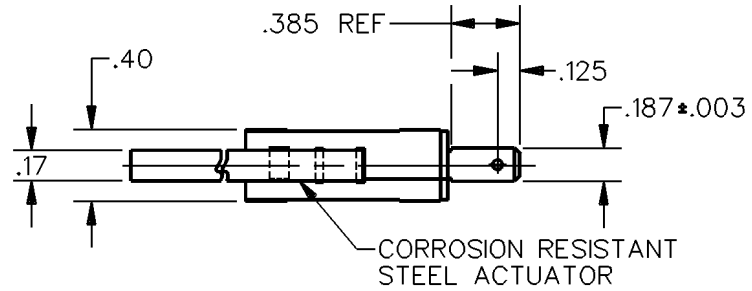

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE	DO NOT SCALE PRINT
OPERATING FORCE — — — — 4 OZ MAX	CONTACT ARRANGEMENT S P D T	-	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
DIFFERENTIAL TRAVEL — — — .067 MAX	15.1A 1/2HP 125, 250, 277 VAC	ONE PLACE (.0)	±.030
OVERTRAVEL — — — — .145 MIN	1/2A 125 VDC; 1/4A 250 VDC	TWO PLACE (.00)	±.015
RELEASE TRAVEL — — — — .035 MIN	5A 125 VAC "L"	THREE PLACE (.000)	±.005
	L215	ANGLES	±
		WEIGHT	