



CW-B1671

REV	DOCUMENT	CHANGED BY	CHECK
4	0041136	SS 26 JUN 08	BLR

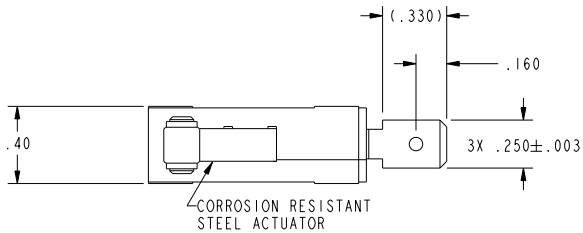

NOTES  
 △ ∅ .19 X .19 WIDE OIL BRONZE ROLLER (CONCENTRICITY .005 FIM)

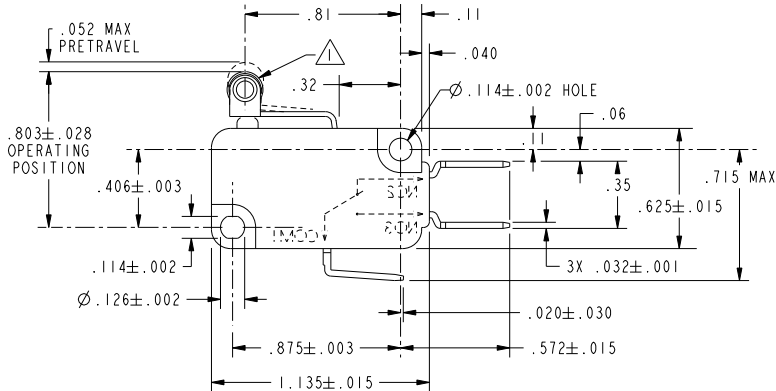

CHARACTERISTICS	ELECTRICAL DATA	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	<input checked="" type="checkbox"/> US (INCH) CUSTOMARY <input type="checkbox"/> SI (MM) METRIC	DRAWN	TSM	7FEB03	<b>Honeywell</b>  TITLE <b>SWITCH , BASIC</b>  SIZE DWG TYPE DRAWING NAME REV <b>B I V7-1C17E9-201 4</b>	
OPERATING FORCE ----- 176 GRAMS MAX	CONTACT ARRANGEMENT S P D T	NO PLACE X ± .040 ± 1		CHECK	SAV	7FEB03		
RELEASE FORCE ----- 19 GRAMS MIN	L215	ONE PLACE .X ± .030 ± 0,4		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				
DIFFERENTIAL TRAVEL ----- .012 MAX	15.1A 1/2HP 125, 250 OR 277 VAC	TWO PLACE .XX ± .015 ± 0,15		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED				
OVERTRAVEL ----- .032 MIN	1/2A 125 VDC	THIRD ANGLE		PTC 2D	ASME Y14.5M-1994	SCALE 2:1	WEIGHT	SHEET 1 OF 1
RELEASE TRAVEL ----- .007 MIN	1/4A 250 VDC; 5A 125 VAC "L"	RAW MATERIAL-COMMERCIAL STANDARD						