


CW-B0037

REV	DOCUMENT	CHANGED BY	CHECK
1	JOB17991	TSM 01DEC00	
2	JOB18670	TSM 12JUL01	
3	204854	TSM 07FEB02	SAV

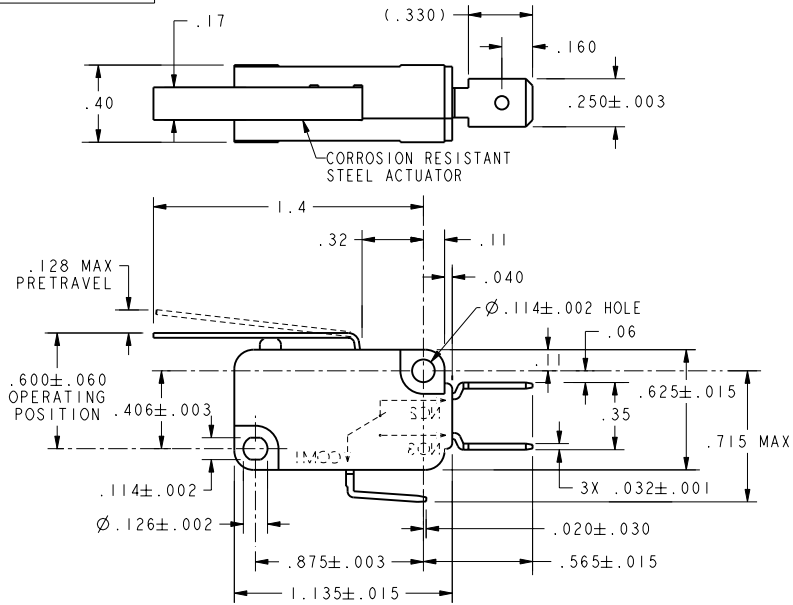

CHARACTERISTICS
OPERATING FORCE-----215 GRAMS MAX
RELEASE TRAVEL-----.017 MIN
RELEASE FORCE-----38 GRAM MIN
DIFFERENTIAL TRAVEL-----.030 MAX
OVERTRAVEL-----.053 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
L156
11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	US (INCH) CUSTOMARY	SI (MM) METRIC
NO PLACE	X ±.040 ±1	
ONE PLACE	.X ±.030 ±0,4	
TWO PLACE	.XX ±.015 ±0,15	
THREE PLACE	.XXX ±.005 ±	
ANGLES	±	±
RAW MATERIAL-COMMERCIAL STANDARD		

DRAWN	TSM	01DEC00
CHECK	SAV	07FEB02

<b>Honeywell</b>		
TITLE <b>SWITCH, BASIC</b>		
SIZE <b>B</b>	DWG TYPE <b>I</b>	DRAWING NAME <b>V7-6B19E9-022</b>
SCALE 2:1	WEIGHT	SHEET 1 OF 1

