
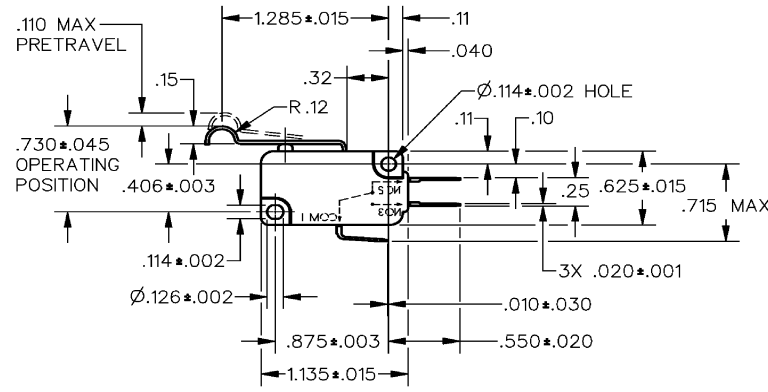


HONEYWELL
PART NUMBER
-

REV	DOCUMENT	CHANGED BY	CHECK
3	0041135	VS 26 JUN 08	BLR

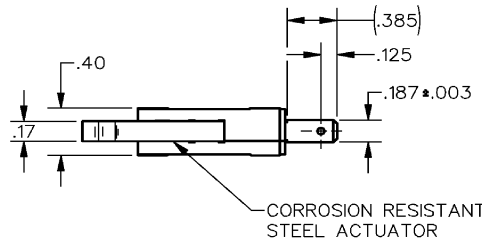

RELEASE NO	CATALOG LISTING
PR-19189	V7-1C17D8-263
	CW-B1655

CHARACTERISTICS	
OPERATING FORCE-----	91 GRAMS MAX
RELEASE FORCE -----	9 GRAMS MIN
DIFFERENTIAL TRAVEL -----	.024 MAX
OVERTRAVEL -----	.061 MIN
RELEASE TRAVEL -----	.015 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L215	
15.1A 1/2HP 125, 250 OR 277 VAC	
1/2A 125 VDC	
1/4A 250 VDC; 5A 125 VAC "L"	

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±

DRAWN	DCS	06JUN08
CHECK	DAW	18JUN08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell		TITLE	REV
SWITCH, BASIC		V7-1C17D8-263	3
SIZE	DWG TYPE	DRAWING NAME	REV
B	I	V7-1C17D8-263	3
SCALE	WEIGHT	SHEET	1 OF 1