
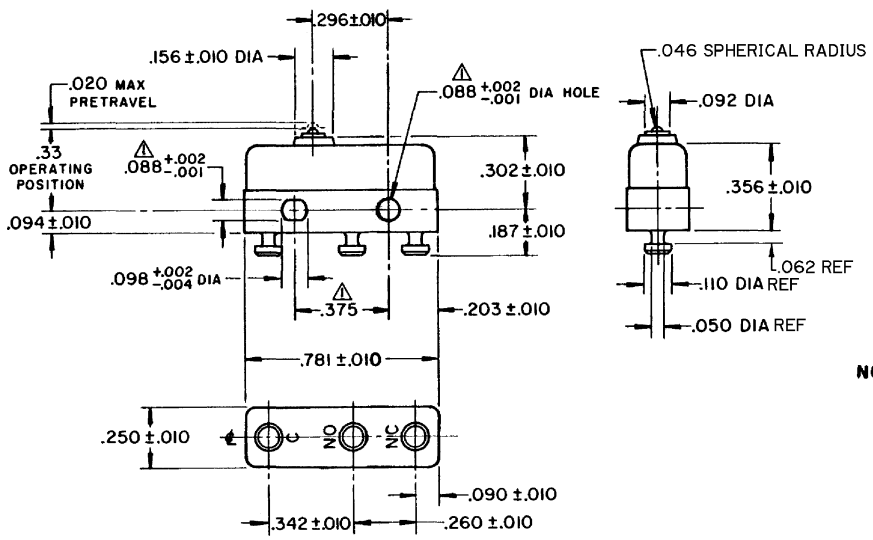


FO-55111-A

HONEYWELL PART NUMBER
11SM3-T
PRODUCT CODE
TWT0360
JG-80188

REV	DOCUMENT	CHANGED BY	CHECK
12	0038090	VS 28APR08	BLR



NOTE -
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS OPERATING FORCE - - - - 3 - 5 OZ RELEASE FORCE - - - - - 1 OZ MIN DIFFERENTIAL TRAVEL - - - .004 MAX OVERTRAVEL - - - - - .005 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T 30 VOLTS DC RATING SEA LEVEL 50,000 FT INDUCTIVE 3 AMP 2.5 AMP RESISTIVE 5 AMP 5 AMP MAXIMUM INRUSH 24 AMP KEMA CE 5A, 250V - T85 IE4 UL CSA 5A, 250 VAC	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± ONE PLACE .XX ± TWO PLACE .XXX ± THREE PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005	DRAWN VK 27 NOV 07 CHECK RJ 27 NOV 07	Honeywell TITLE SWITCH - BASIC SIZE B TYPE I DRAWING NAME 11SM3-T REV 12 SCALE - WEIGHT .006 LB MAX SHEET 1 OF 1
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY RASTER	