

FO-55111-A

4


3

2

1

HONEYWELL PART NUMBER
V7-9W2AE9
CWC6393

REV	DOCUMENT	CHANGED BY	CHECK
B	0009549	DVM 19NOV04	AK

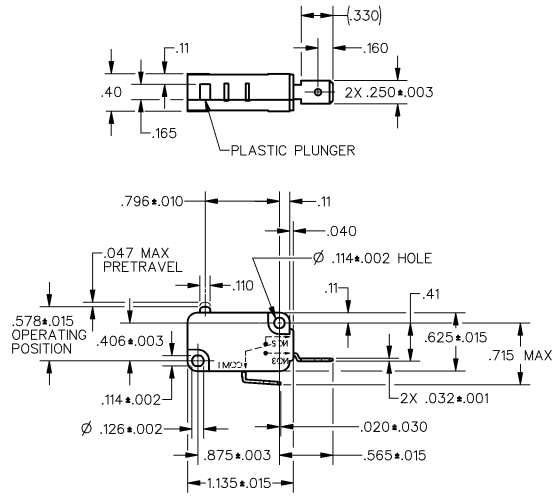

- NOTES
- 1 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION
 - 2 - SILVER PLATED TERMINALS
 - 3 - SWITCH WILL FUNCTION A MINIMUM OF 1000 ACTUATIONS AT RATED LOAD WHILE EXPOSED TO A 350°F ENVIRONMENT FOR 600 HOURS

REPLACES X115872-V7

CHARACTERISTICS OPERATING FORCE—300 GRAMS MAX RELEASE FORCE—25 GRAMS MIN DIFFERENTIAL TRAVEL—.010 MAX OVERTRAVEL—.050 MIN FREE POSITION—.630 MAX RELEASE TRAVEL—.010 MIN		ELECTRICAL DATA CONTACT ARRANGEMENT S P N O L264 15.1A 125, 250, 277 VAC		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ±		DRAWN KSR 09NOV04 CHECK AK 09NOV04 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		Honeywell TITLE SWITCH - BASIC	
THIRD ANGLE PROJECTION				RASTER		SIZE B I TYPE I DRAWING NAME V7-9W2AE9 SCALE 1:1		REV B SHEET 1 OF 1	

4

3

2

1