
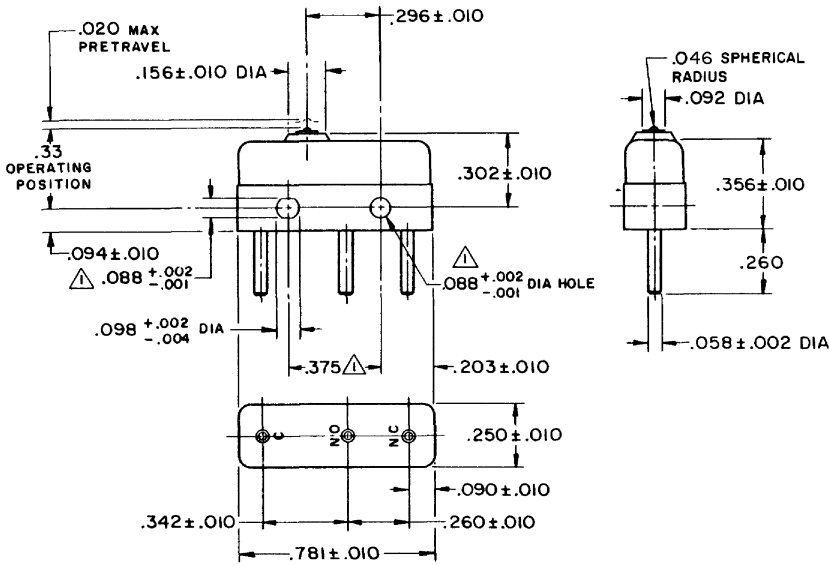


FO-55111-A

HONEYWELL
PART NUMBER
11SM1-H2
PRODUCT CODE
TWT0130

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| 9 | 0038090 | VS 28APR08 | BLR |



NOTE -
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2 - PLATED TERMINALS WILL ACCEPT AIRCRAFT MARINE PRODUCTS CO NO. 42429 CONNECTOR

| | |
|-------------|---|
| RELEASE NO. | - |
| REPLACES | - |

| CHARACTERISTICS |
|------------------------------------|
| OPERATING FORCE - - - - 3 - 5 OZ |
| RELEASE FORCE - - - - 1 OZ MIN |
| DIFFERENTIAL TRAVEL - - - .004 MAX |
| OVERTRAVEL - - - - - .005 MIN |

| ELECTRICAL DATA |
|---|
| CONTACT ARRANGEMENT S P D T |
| 30 VOLTS DC RATING |
| SEA LEVEL 50,000 FT |
| INDUCTIVE 3 AMP 2.5 AMP |
| RESISTIVE 5 AMP 5 AMP |
| MAXIMUM INRUSH 24 AMP |
| APPROVALS KEMA CE 5A, 250V ~ T85 1E4 UL CSA 5A, 250 VAC ~ |

| DESIGN UNITS: INCH |
|--------------------------|
| TOLERANCES UNLESS NOTED: |
| NO PLACE .X ± |
| ONE PLACE .XX ± |
| TWO PLACE .XXX ± |
| THREE PLACE .XXXX ± |
| FOUR PLACE .XXXX ± |
| ANGLES ± |
| THIRD ANGLE PROJECTION |

| | | |
|--|----|-----------|
| DRAWN | VK | 29 NOV 07 |
| CHECK | RJ | 29 NOV 07 |
| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. | | |
| INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY | | |
| RASTER | | |

| | | | |
|-------------------------|------|--------------------|--------------|
| Honeywell | | | |
| TITLE SWITCH - BASIC | | | |
| SIZE | TYPE | DRAWING NAME | REV |
| B | I | 11SM1-H2 | 9 |
| SCALE | - | WEIGHT .006 LB MAX | SHEET 1 OF 1 |

4

3

2

1