

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929



SWITCH - BASIC

CATALOG LISTING

V3L-84

5


CQ-A8310

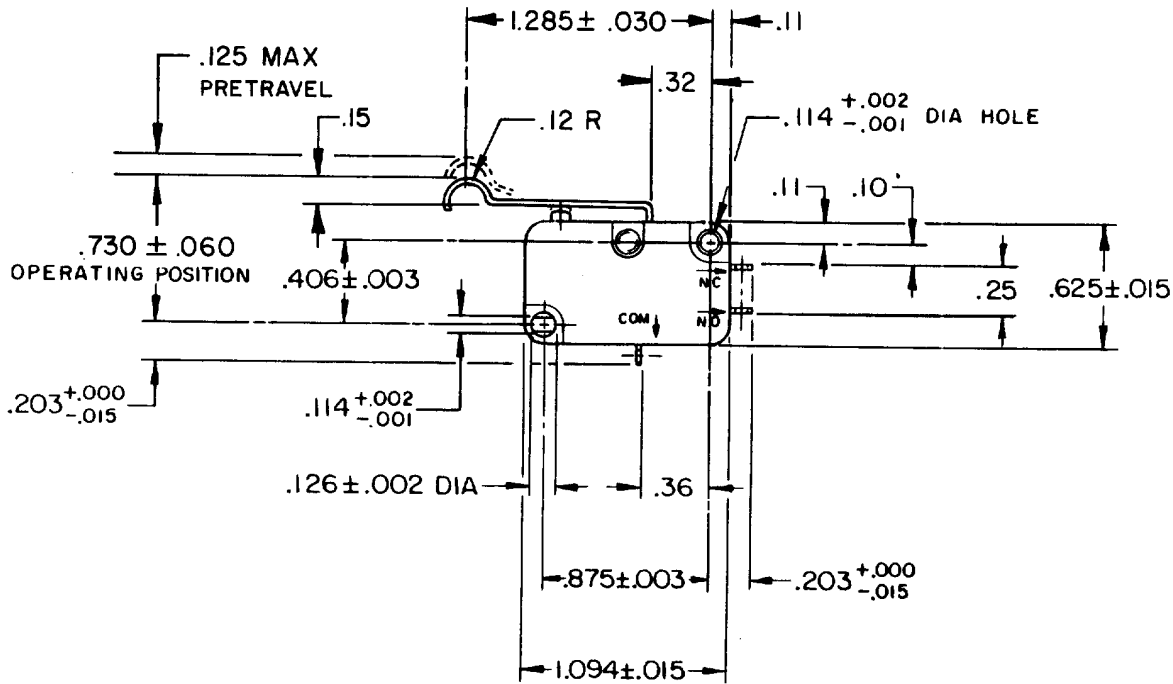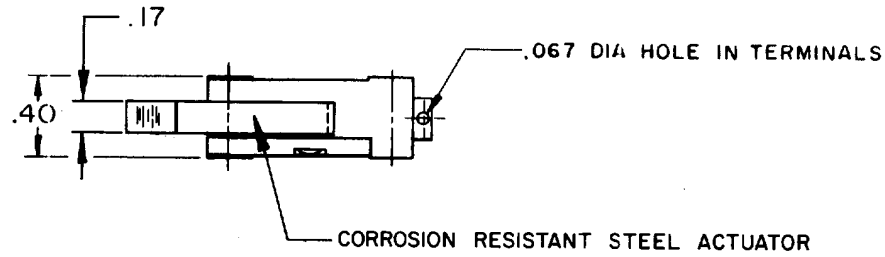

NOTE -
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	
OPERATING FORCE	-----8 OZ MAX
RELEASE FORCE	-----1 OZ MIN
DIFFERENTIAL TRAVEL	-----.032 MAX
OVERTRAVEL	-----.080 MIN
RELEASE TRAVEL	-----.015 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L83 15.1A 1/2HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	

SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±				
	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X X	0.8/.03
ONE PLACE	X,X	0.4/.016	X,X X	0.38/.015
TWO PLACES	X,X,X	0.15/.006	X,X X,X	0.13/.005
THREE PLACES	X,X,X,X		X,X,X X	
ANGLES				
DESIGN UNITS	SI METRIC <input type="checkbox"/>		US CUSTOMARY <input checked="" type="checkbox"/>	
WEIGHT				

V3L-84
 M
 DRAWING NUMBER
 8
 ISSUE
 84
 CHECK
 REVISIONS
 A CO 30997 SMA 1 OCT 85
 B CO-59205 BAB 3 JAN 91
 C CO 76442 DCS 2 DEC 93
 RELEASE NO. PR-4266 REPLACES
 FO-52848-A DRAWN
 J A L 15 AUG 74 CHECK DOB 28 AUG 74 CHECK