


FO-55111-A

HONEYWELL
PART NUMBER
311SM706-T
PRODUCT CODE
TZA2686

REV	DOCUMENT	CHANGED BY	CHECK
9	0038445	SSK 28APR08	BLR

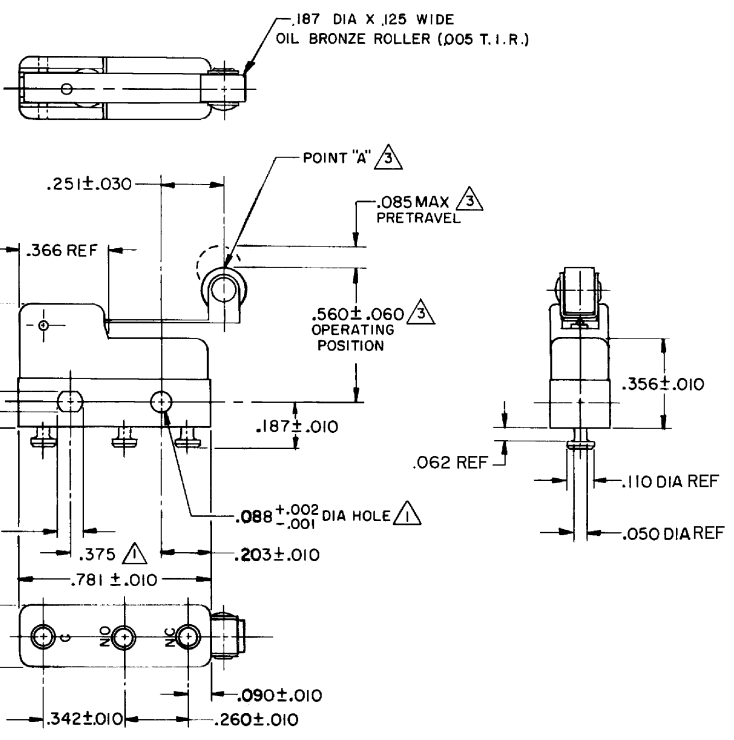

- NOTES**
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - ② SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - ③ CHARACTERISTICS TAKEN AT POINT "A"
 - ④ TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO. PR-1059
REPLACES -

CHARACTERISTICS
OPERATING FORCE -- 16 GRAM MAX
RELEASE FORCE --- 3 GRAM MIN
DIFFERENTIAL TRAVEL-- .013 MAX
OVERTRAVEL----- .018 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP 2.5 AMP
RESISTIVE	5 AMP 5 AMP
MAXIMUM INRUSH 24 AMP	
UL, CSA	4A, 250 VAC
BRAND	L119

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	VK	21FEB 08
CHECK	RJ	21FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SM706-T	9
SCALE	-	WEIGHT.006 LB MAX	SHEET 1 OF 1

4

3

2

1