



**MICRO SWITCH**

FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

# SWITCH - BASIC

CATALOG LISTING  
**BZ-2RQ1-A2**

ALF4500

**BZ-2RQ1-A2**  
PAGE 1 OF 1

**M**  
DRAWING NUMBER

9  
ISSUE

REVISIONS


A	CO-17410	GCH	22 MAY 63
B	CO-73287-4	DHD	17 MAY 93
C	CO-77589	KDR	29 MAR 94
D	CO-82133		
E	CO-93346	CSL	25 JUL 96
F	0015139	DLT	10 SEP 98
		TSG	23 AUG 05

FORMTEK  
O-80376  
DRAWN

RELEASE NO. 15 JUN 63

CHECK 1.S.D

REPLACES

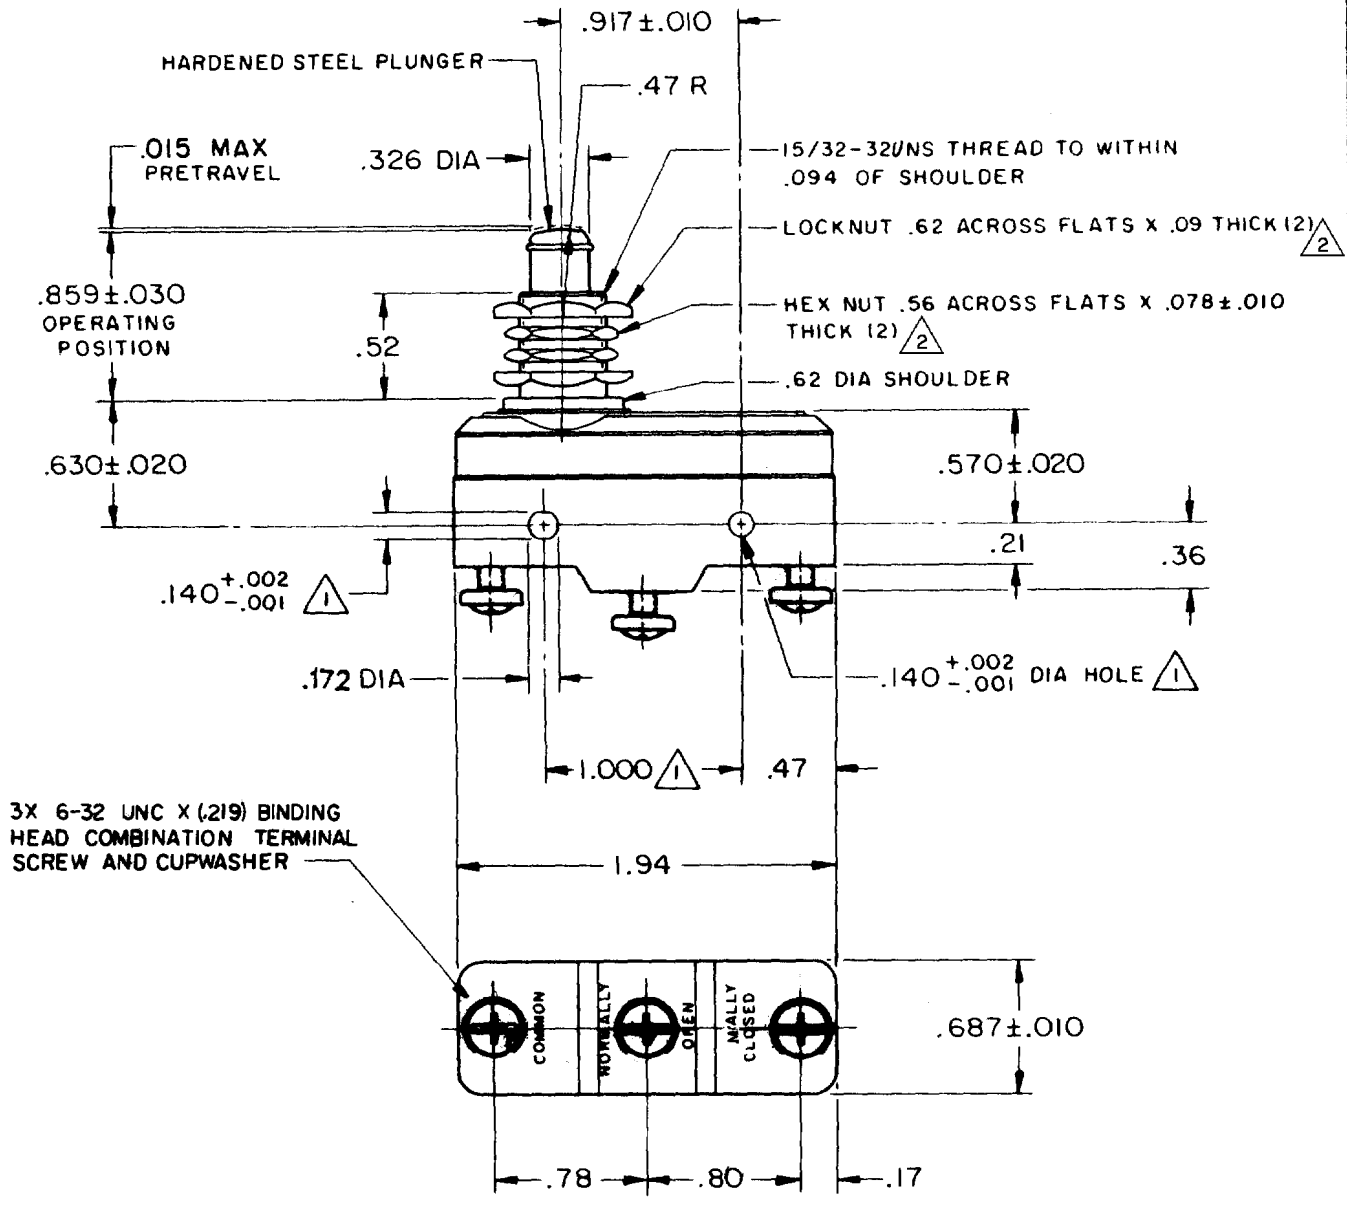

3X 6-32 UNC X (.219) BINDING HEAD COMBINATION TERMINAL SCREW AND CUPWASHER

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
  - ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	
OPERATING FORCE ----- 9 - 13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT	
RELEASE FORCE ----- 4 OZ MIN	-L96- 15 A - 125, 250, OR 480 VAC 1/2 A - 125 VDC, 1/4 A - 250 VDC 1/8 HP - 125 VAC, 1/4 HP - 250 VAC  -L288- -L306- -L315-	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES <b>TOLERANCES ARE:</b>	
DIFFERENTIAL TRAVEL ----- 0004 - .0020		CE EN05 EC 16A 250V ~ T85 5E4	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL ----- .219 MIN			WEIGHT .094 LB