


FO-55111-A

HONEYWELL  
PART NUMBER  
311SX4-T  
PRODUCT CODE  
VDS0040

REV	DOCUMENT	CHANGED BY	CHECK
14	0038558	SS 08MAY08	BLR

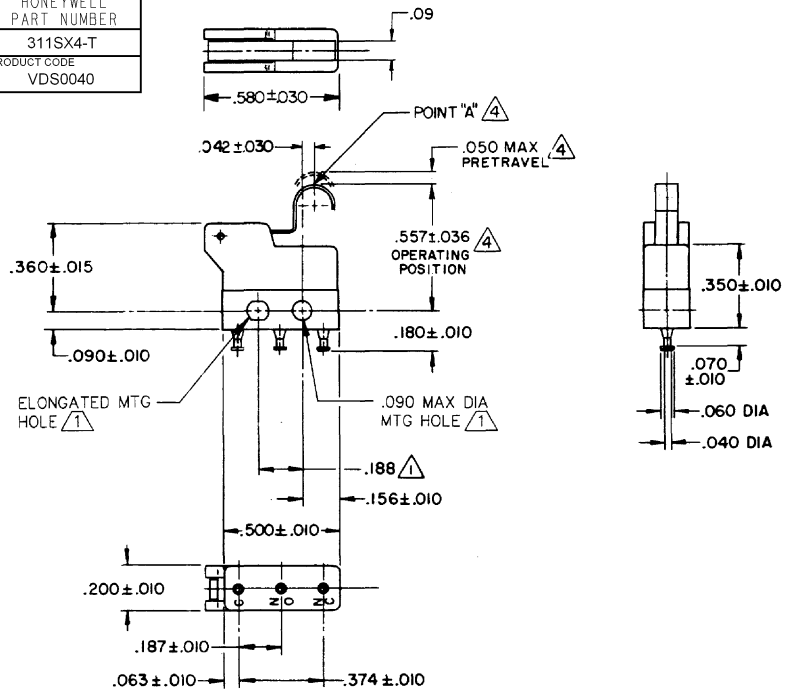

NOTE -  
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F  
 4 CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO. PR-861  
 REPLACES X41462-SX

<b>CHARACTERISTICS</b> $\Delta$ OPERATING FORCE - - -60 GRAM MAX RELEASE FORCE - - -11 GRAM MIN DIFFERENTIAL TRAVEL - - .015 MAX OVERTRAVEL - - - - .010 MIN	<b>ELECTRICAL DATA</b> CONTACT ARRANGEMENT S.P.D.T. 28 VOLTS DC RATING 115 VOLTS AC, 60 CPS SEA LEVEL 50,000 FT SEA LEVEL INDUCTIVE 3 AMP 2 AMP 5 AMP RESISTIVE 5 AMP 4 AMP 5 AMP	<b>DESIGN UNITS: INCH</b> TOLERANCES UNLESS NOTED: NO PLACE .X ± ONE PLACE .XX ± TWO PLACE .XXX ± THREE PLACE .XXXX ± FOUR PLACE .XXXXX ± ANGLES ±	DRAWN SPK 26FEB08 CHECK RJ 26FEB08	<b>Honeywell</b> TITLE SWITCH - BASIC
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	