
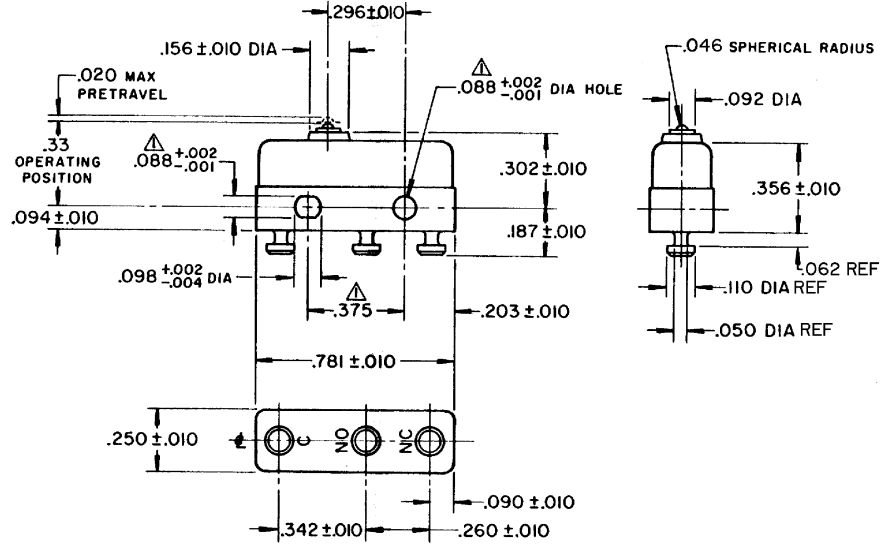


FO-55111-A
HONEYWELL PART NUMBER
11SM23-T
PRODUCT CODE
TWT2360
JG-80220

REV	DOCUMENT	CHANGED BY	CHECK
7	0038091	VS 28APR08	BLR



**NOTE -**  
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2-TERMINALS ARE PLATED FOR SOLDERING  
 3-MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS
OPERATING FORCE - - - - 3 - 5 OZ
RELEASE FORCE - - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .004 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
30 VOLTS DC RATING
SEA LEVEL 50,000 FT
INDUCTIVE 1/2 AMP 1/2 AMP
RESISTIVE 1 AMP 1 AMP
MAXIMUM INRUSH 2 AMP
KEMA CE 1A, 250V ~ T85 1E4
UL CSA 1A, 125 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SM23-T	7
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1

4

3

2

1