


FO-55111-A

HONEYWELL  
PART NUMBER  
311SX2-T  
PRODUCT CODE  
VDS0020

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

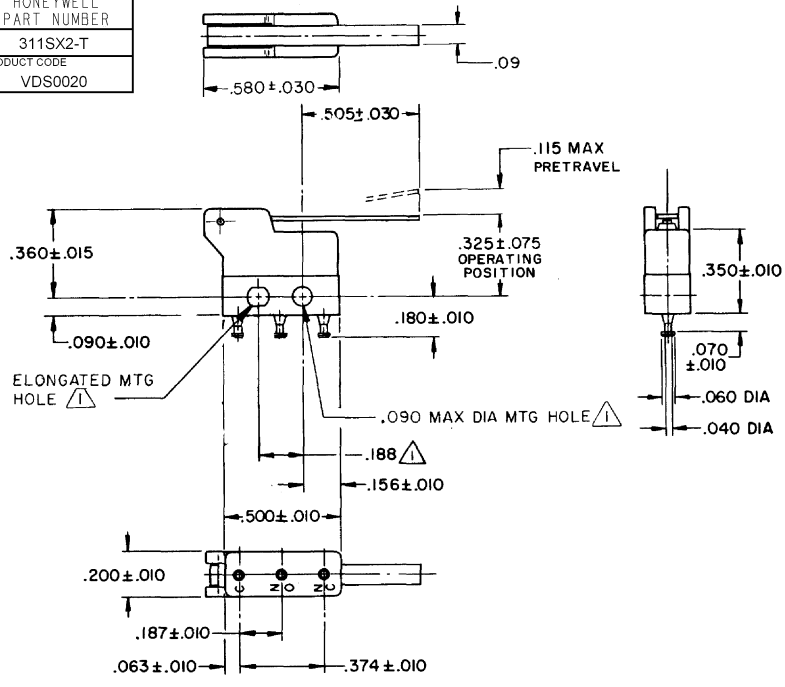

**NOTE -**  
 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR-861  
 REPLACES X41465-SX

<b>CHARACTERISTICS</b> OPERATING FORCE --- 30 GRAM MAX RELEASE FORCE --- 5 GRAM MIN DIFFERENTIAL TRAVEL --- .035 MAX OVERTRAVEL --- .025 MIN	<b>ELECTRICAL DATA</b> CONTACT ARRANGEMENT S.P.D.T. 28 VOLTS DC RATING 115 VOLTS AC, 60 CPS SEA LEVEL 50,000 FT SEA LEVEL INDUCTIVE 3 AMP 2 AMP 5 AMP RESISTIVE 5 AMP 4 AMP 5 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±	DRAWN SPK 25FEB08 CHECK RJ 25FEB08	<b>Honeywell</b> TITLE SWITCH - BASIC
			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	
APPROVALS KEMA CE 5A 250 V - T125 5E4 UL CSA 5A 250 VAC		THIRD ANGLE PROJECTION	RASTER	