


FO-55111-A

HONEYWELL
PART NUMBER
311SX5-T
PRODUCT CODE
VDS0050

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

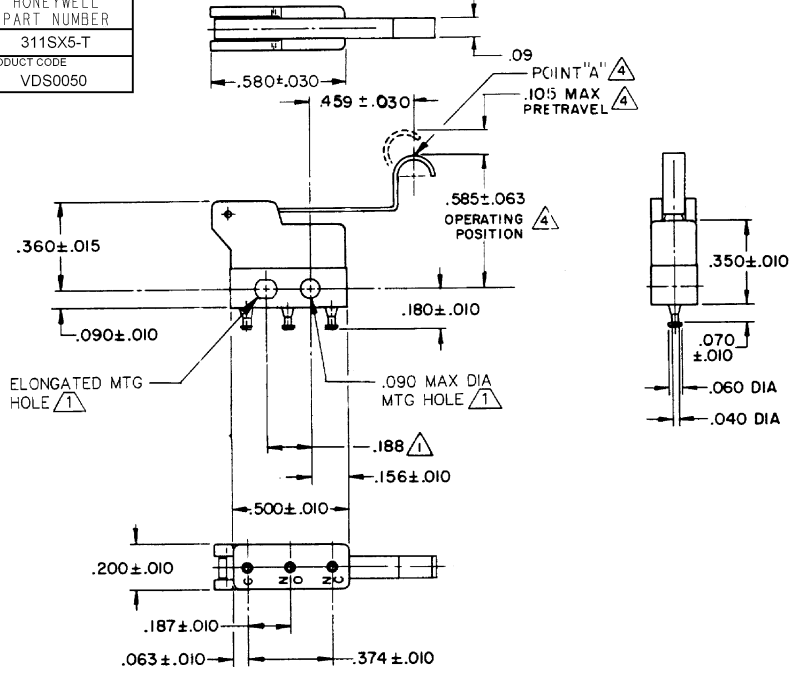

- NOTES
- 1 MOUNTING HOLE WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.188 \pm .002$ CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4 CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO. PR-861
REPLACES X41463-SX

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE -- -30 GRAM MAX	CONTACT ARRANGEMENT S P D T
RELEASE FORCE -- 5 GRAM MIN	28 VOLTS DC RATING 115 VOLTS AC 60 CPS
DIFFERENTIAL TRAVEL -- $.035$ MAX	SEA LEVEL 50,000 FT SEA LEVEL
OVERTRAVEL -- $.022$ MIN	INDUCTIVE 3 AMP 2 AMP 5 AMP
	RESISTIVE 5 AMP 4 AMP 5 AMP
	APPROVALS KEMA CE 5A 250 V - T125 5E4 UL CSA 5A 250 VAC

DESIGN UNITS: INCH	TOLERANCES UNLESS NOTED:
NO PLACE X \pm	0.030
ONE PLACE .X \pm	0.015
TWO PLACE .XX \pm	0.005
THREE PLACE .XXX \pm	
FOUR PLACE .XXXX \pm	
ANGLES \pm	

DRAWN	SPK	26FEB08
CHECK	RJ	26FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell	
TITLE SWITCH - BASIC	
SIZE B	TYPE I
DRAWING NAME 311SX5-T	REV 12
SCALE -	WEIGHT: SHEET 1 OF 1

4

3

2

1