


FO-55111-A

HONEYWELL
PART NUMBER
311SX1-T
PRODUCT CODE
VDS0010

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

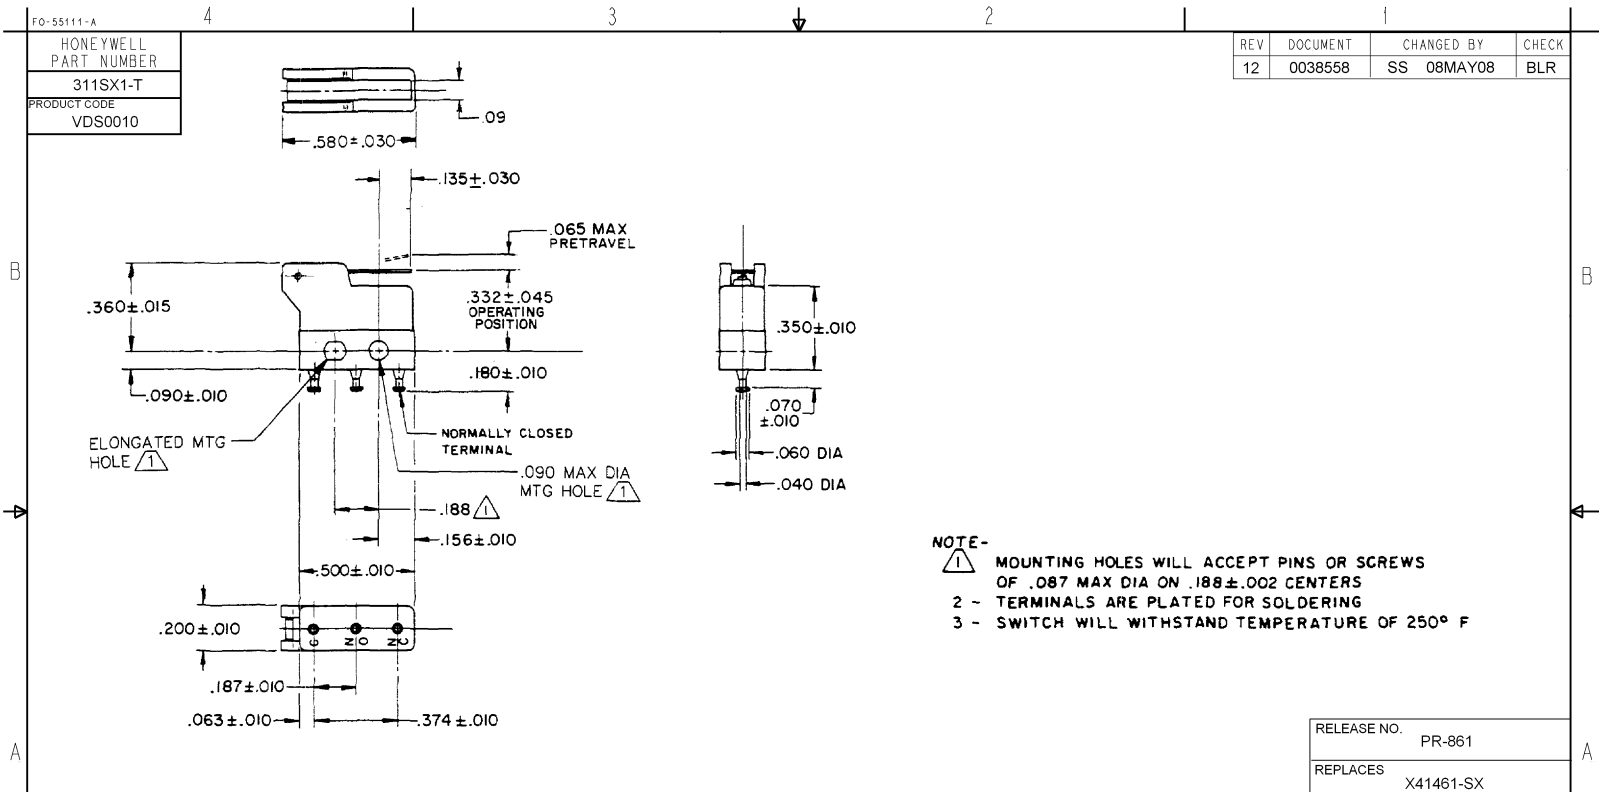

RELEASE NO.	PR-861
REPLACES	X41461-SX

CHARACTERISTICS
OPERATING FORCE - - - 50 GRAM MAX
RELEASE FORCE - - - 9 GRAM MIN
DIFFERENTIAL TRAVEL - - .020 MAX
OVERTRAVEL - - - .014 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
28 VOLTS DC RATING	115 VOLTS AC, 60 CPS
SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP 2 AMP 5 AMP
RESISTIVE	5 AMP 4 AMP 5 AMP
APPROVALS KEMA CE 5A 250 V - T125 5E4 UL CSA 5A 250 VAC	

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	25FEB08
CHECK	RJ	25FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SX1-T	12
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1